
1. FOR FM-IF

Part Number	Center Frequency (MHz)	3dB Bandwidth (KHz)	20dB Bandwidth (KHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
LT10.7MA5-A	10.7±0.03	280±50	≤650	≤6	≥30
LT10.7MS2-A	10.7±0.03	230±50	≤600	≤6	≥40
LT10.7MS3-A	10.7±0.03	180±40	≤520	≤7	≥40
LT10.7MJ-A	10.7±0.03	150±40	≤400	≤10	≥35

2. LOW LOSS TYPE

Part Number	Center Frequency (MHz)	3dB Bandwidth (KHz)	20dB Bandwidth (KHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
LT10.7MA5A10-A	10.7±0.03	280±50	≤590	2.5±2	≥30
LT10.7MS2A10-A	10.7±0.03	230±50	≤520	3±2	≥35
LT10.7MS3A10-A	10.7±0.03	180±40	≤470	3.5±1.5	≥35
LT10.7MJA10-A	10.7±0.03	150±40	≤360	4.5±2	≥35
LT10.52MJA10-A	10.52±0.03	150±40	≤360	4.5±2	≥35


3. FOR DBS RECEIVER

Part Number	Center Frequency (MHz)	3dB Bandwidth (KHz)	20dB Bandwidth (KHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
LT10.7MA19-A	10.7±0.03	≥350	≤950	3.0±2	≥20
LT10.7MA20-A	10.7±0.03	330±50	≤680	4.0±2	≥30

4. NARROW BAND TYPE

Part Number	Center Frequency (MHz)	3dB Bandwidth (KHz)	20dB Bandwidth (KHz)	Insertion Loss (dB)	Spurious Attenuation (dB)
LT10.7MFP	10.7±0.03	≥20	≤95	≤6	≥24

5. DIMENSION

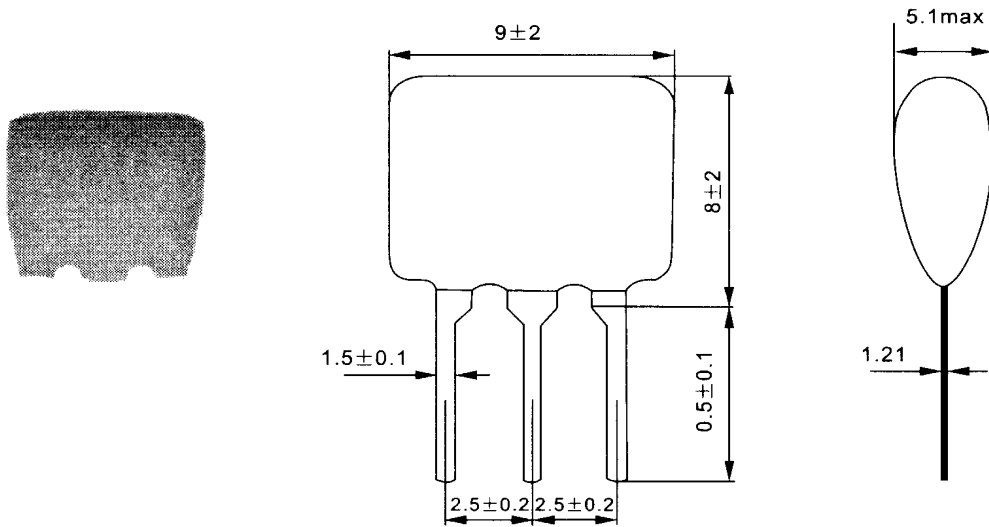

Note: The rank of center frequency is as follows

	30 KHz Steps	Color
D	10640 ± 30	Black
B	10670 ± 30	Blue
A	10700 ± 30	Red
C	10730 ± 30	Yellow
E	10760 ± 30	White