


Manganese Dioxide Lithium Coin Batteries: Individual Specifications

CR2032


Dimensions(mm)

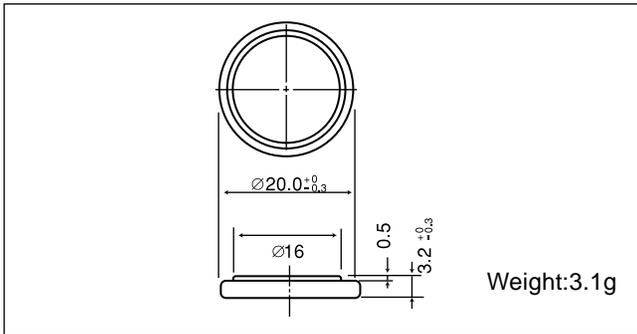


Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	220
Continuous standard load (mA)	0.2
Operating temperature (C)	-30 ~ +60


Temperature Characteristics

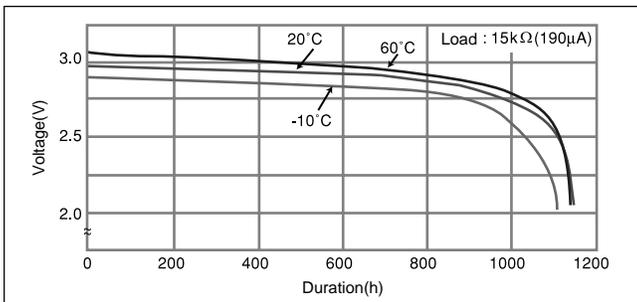

Operating voltage vs. load resistance (voltage at 50% discharge depth)

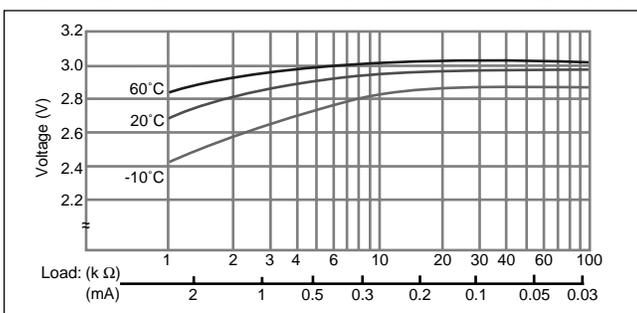

Capacity vs. load resistance

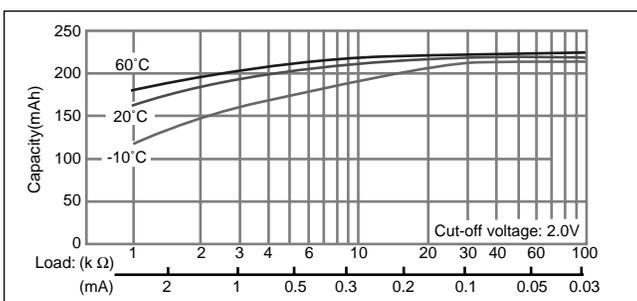

Lithium Battery Holders for CR2032

These battery holders are designed for sure and easy loading/removal of Panasonic coin type lithium batteries in/ from equipment enabling the batteries to fully exploit their capabilities as the backup power supply in C-MOS RAM memory and microcomputer memory. All of the battery holders are designed to prevent inverted insertion of the battery.




BCR20H4


BCR20H5

BCR20V4


BCR20H4 (3 terminals)

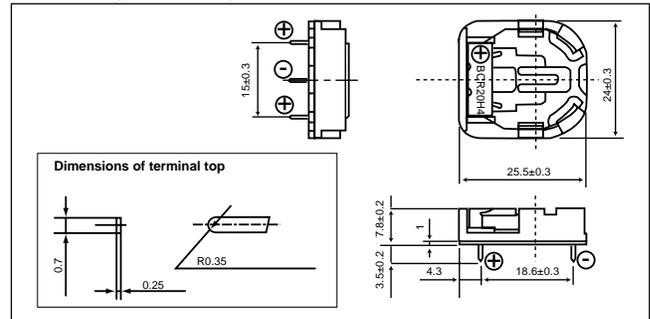

BCR20H5 (2 terminals)

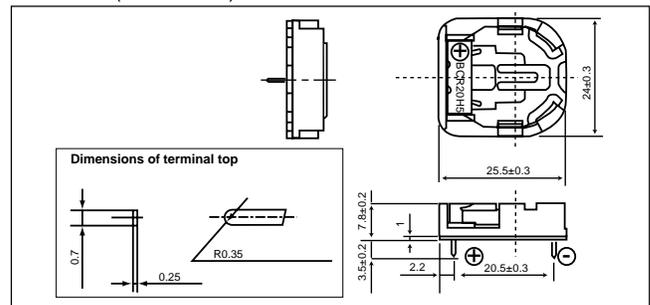

BCR20V4 (3 terminals)

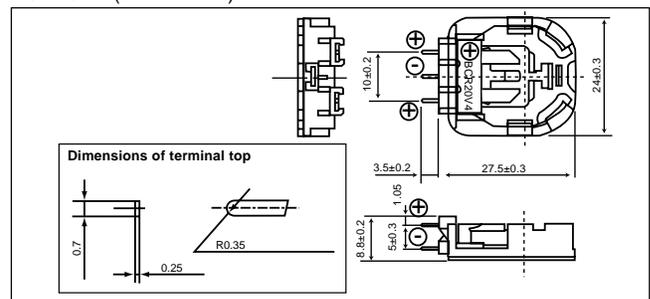

Precaution for washing battery holders

The battery holders can be adversely affected by some detergents used in the circuit board washing process which can result in cracks forming in the holder. Please test the holders in your washing process before use.