


CHEAPE TECHNOLOGY INTERNATIONAL LTD
ER10280

► **MODEL NO.: ER10280**


| | |
|---|-----------------------------|
| ■ SPECIFICATION: ($23 \pm 2^\circ\text{C}$) | |
| Nominal capacity ($0.5\text{mA} \sim 2\text{V}$): | 0.45 A h |
| Rated voltage: | 3.6 V |
| Max constant current of discharge: | 10 mA |
| Max discharge current (pulse): | 20 mA |
| Weight: | 5 g |
| Operating temperature range: | $-55 \sim 85^\circ\text{C}$ |

U.L. Component Recognition MH 29130



■ Discharge characteristics at $23 \pm 2^\circ\text{C}$

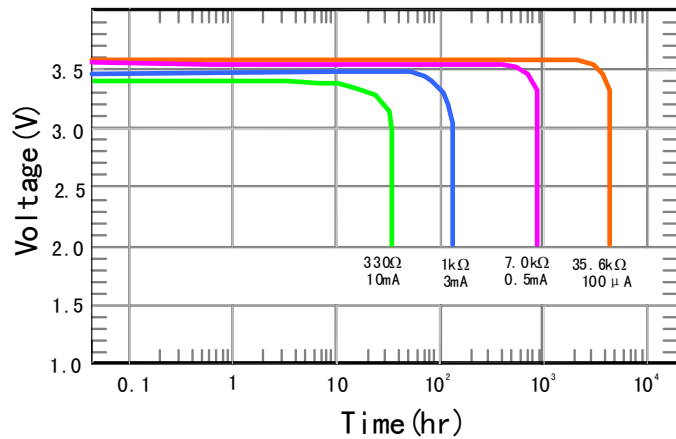

■ Capacity VS. Current

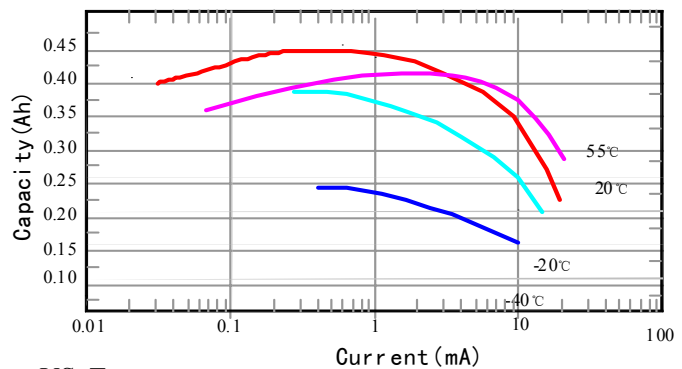

■ Voltage VS. Temperature

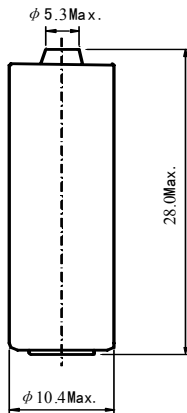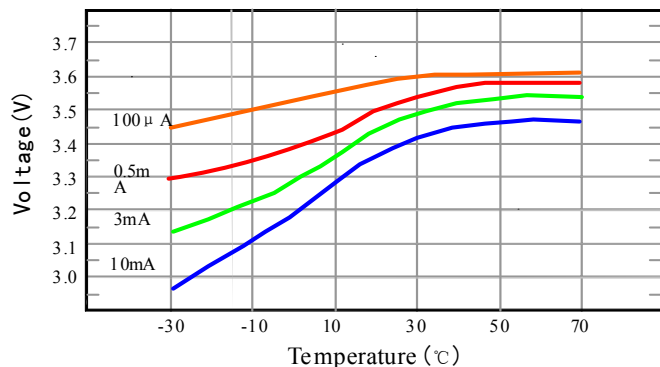

S: Standard termination

Notes:

- Dimension: mm
- Special terminations can be Made as requested.
- T: Solder tabs
- P: Axial pins

■ Important Notes:

- Do not short or charge the battery.
- Over-discharging, crushing, incinerating, and disassembling the battery are prohibited.
- Do not heat/use the battery beyond the permitted temperature range.