

CHEAPE TECHNOLOGY INTERNATIONAL Ltd

1. Preface

The purpose of this product specification is to provide technical information for the rechargeable Lithium-ion button battery LiR2450.

2. Description and Model

| | |
|-----------------|---|
| 2.1 Description | Rechargeable Lithium-ion button battery |
| 2.2 Model | LiR2450 |

3. Specification

| | | |
|--------------------------------------|----------------------------|--|
| 3.1 Capacity | Nominal | 100mAh |
| | Typical | 120mAh |
| 3.2 Charging Voltage | | 4.20V |
| 3.3 Nominal Voltage | | 3.7V at 0.2C mA |
| 3.4 Standard Charging Method | | Constant current:50mA Constant voltage 4.20V total 5 |
| 3.5 Cut-off Discharge Voltage | | 3.00V |
| 3.6 Max.Discharge Current | | 200mA |
| 3.7 Max.Charge Current | | 100mA |
| 3.8 Cycle Life | | >500 cycles at 0.2C mA discharge |
| 3.9 Ambient Temperature | | |
| | for Standard Charge | 0°C ~ 45°C |
| | for Discharge | -20°C ~ 60°C |
| 3.10 Storage | | |
| | for within the temperature | -20°C ~ 60°C |
| | for within the humidity | ≤75% |
| 3.11 Energy Density | | |
| | Wh/L | ~200 |
| | Wh/Kg | ~90 |
| 3.12 Weight of Bare Cell | | ~5.5g |
| 3.13 Charge State Internal Impedance | | <400m Ω |

4. Appearance

Appearance shall be free from any remarkable scratch, flaws, rust, discoloration or electrolyte leakage (visible or by smell)

5. Standard Test condition

5.1 Environment Conditions

within the temperature 15~25°C and the humidity 45~85%RH.

CHEAPE TECHNOLOGY INTERNATIONAL Ltd

5.2 Test Equipment

(1) Impedance meter

The impedance meter with AC 1kHz should be used

6. Test Procedure and Its Standard

| Item | Measuring Procedure | Standard |
|----------------------------------|---|--|
| 6.1 Appearance | Visual | No Defect and Leak |
| 6.2 Dimension | Caliper | As item 8 |
| 6.3 Weight | Scale | As item 3.12 |
| 6.4 Maximum Charge Current | CCCV(Constant Current Constant Voltage) | 100mA |
| 6.5 Full charge | CCCV | CC-0.2CmA CV- 4.2V total 8h |
| 6.6 Open Circuit Voltage | Within 1hr after full charge,measure Open circuit voltage | >4.15V |
| 6.7 Internal Impedance | Measure the battery with 1kHz AC | <400m Ω |
| 6.8 Discharge Capacity | Within 1hr after full charge,discharge until final discharge,at 0.2C mA and measure the capacity | >100mAh |
| 6.9 Maximum Discharge Current | Until final discharge voltage | 200 mA |
| 6.10 Charge/Discharge Cycle Life | Charge:CCCV,CC- 0.2CmA,CV- 4.2V total 8h Discharge:0.2CmA to 3.00V,This charge/discharge shall be repeated 500 times | Discharge capacity should be >70% of item 6.8 |
| 6.11 Leakage Proof | After full charging,the battery shall be stored at 40±2°C and humidity 80±5%for 21 days | No leakage should be observed by visual inspection |
| 6.12 Temperature Characteristics | 1)After full charge at 20±5°C ,stand at -20±2°C for 18h,then discharge at 0.2C mA and measure the capacity 2)After full charge at 20±5°C ,stand at 55±2°C for 2hrs ,then discharge at 1C mA and measure the capacity | Discharge capacity should be>60% of item 6.8 and no abnormality on its appearance and stucture |
| 6.13 Charge Retension | After full charging,stand at 20±5°C for 28 days,measure the discharge | Discharge capacity should be>85% of item |


CHEAPE TECHNOLOGY INTERNATIONAL Ltd

7.1 Charge/Discharge Characteristics

Charge:CC/CV 4.2V, 50mA(0.5C),
total 5h

Discharge:50mA(0.5C) Cut-off at 3.00V


Temperature:25°C

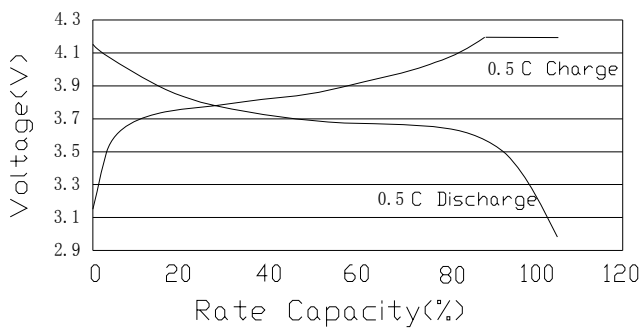

7.3 Temperature Characteristics

Charge: CC/CV 4.2V 0.5CA, total 5h

Discharge:0.5CA, Cut-off at 3.00V

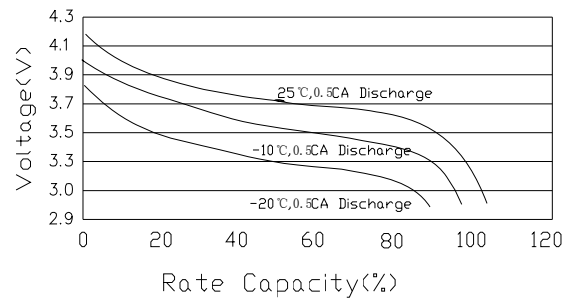


7.2 Charge/Discharge Cycle Life

Charge:CC/CV 4.2V, 0.2CA,
total 8h

Discharge:0.2CA, Cut-off at 3.00V

Temperature:25°C

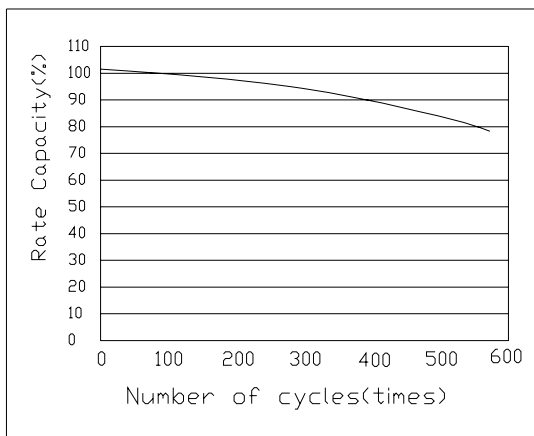

8. Dimension (Bare cell) mm

