


Manganese Lithium Coin Batteries (ML series): Individual Specifications

ML920S

Dimensions(mm)

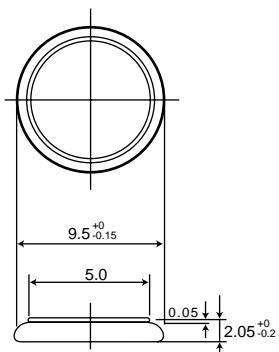


Note: This bare cell diagram is for size reference only. Please refer to the tab configurations at the end of this section for available tabs.


Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	11.0
Continuous standard load (mA)	0.03
Operating temperature (C)	-20 ~ +60

Discharge characteristics

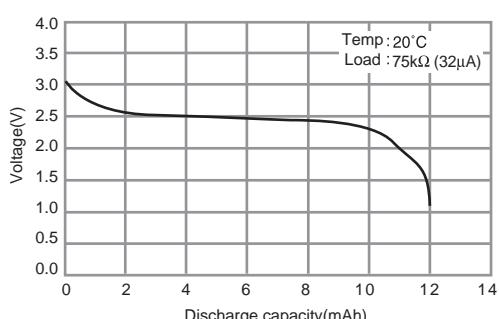


Consumption current vs. Duration time

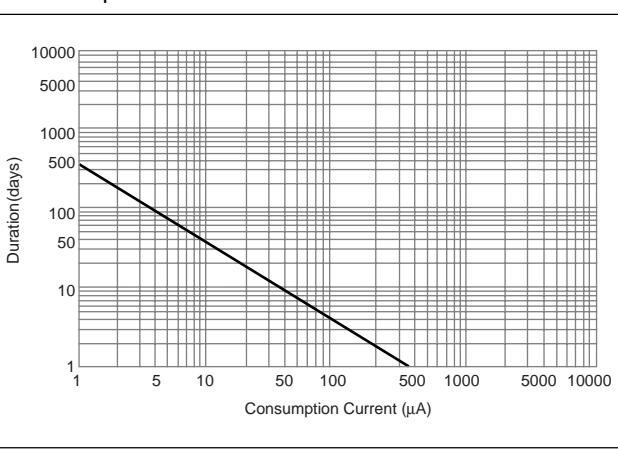

ML1220

Dimensions(mm)

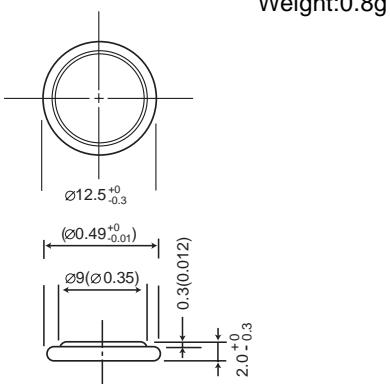


Note: This bare cell diagram is for size reference only. Please refer to the tab configurations at the end of this section for available tabs.

Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	17.0
Continuous standard load (mA)	0.03
Operating temperature (C)	-20 ~ +60

Discharge characteristics

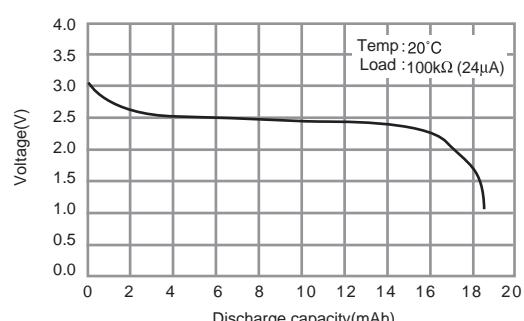

Consumption current vs. Duration time

