


## 300mA、6V、Low Power LDO

# SSP7212

### General Description

The SSP7212-ADJ series are highly precise, low noise, positive voltage LDO regulators manufactured using CMOS processes. The series achieves high ripple rejection and low dropout and consists of a standard voltage source, an error correction, current limiter and a phase compensation circuit plus a driver transistor. External output feedback, customers can easily get the required voltage . In order to make the load current does not exceed the current capacity of the output transistor , built-in over-current protection , over temperature protection and short circuit protection.

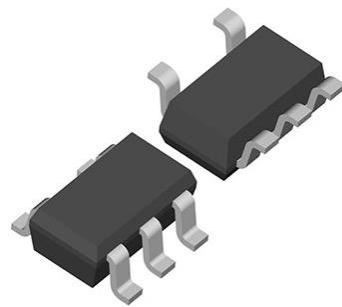

### Features

- programmable output: Minimum can go to 0.8V
- Highly Accurate:  $\pm 1.5\%$
- Dropout Voltage: 300mV @ 100mA (3.0V type)
- High Ripple Rejection: 50dB (10 kHz)
- Low Power Consumption: 30 $\mu$ A (TYP.)
- Maximum Output Current : 300mA ( $V_{in} \geq V_{out} + 1V$ )
- Standby Current : less than 0.1 $\mu$ A
- Internal protector: current limiter ,short protector and over temperature protection
- Instructions with POWER GOOD
- SOT23-5L packages

### Applications

- Mobile phones
- Cordless phones
- Cameras, Video cameras
- Portable games
- Portable AV equipment
- Reference voltage
- Battery powered equipment

**Order information**

| Device        | Package  | Packaging style | SPQ  |
|---------------|----------|-----------------|------|
| SSP7212-ADJXX | SOT23-5L | Reel            | 3000 |


**Order Information**
**SSP7212-ADJ①②**

| Designator | Symbol | Description      |
|------------|--------|------------------|
| ADJ        | ADJ    | Output Voltage   |
| ①          | M5     | Package:SOT23-5L |
| ②          | R      | RoHS / Pb Free   |
|            | G      | Halogen Free     |

Note:"ADJ" stands for output voltages. Other Voltages can be specially customized


**Marking Rule**

- SOT23-5L

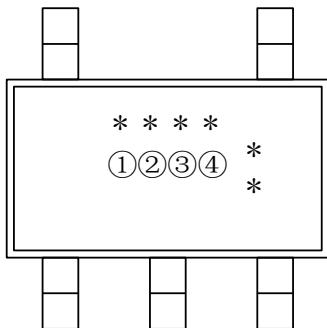

**Function Block Diagram**

| Parameter | Content            | Description                                    |
|-----------|--------------------|--|
| ①         | 4                  | Representative SSP7212-ADJ                     |
| ②         | a                  | Active 'High' (pull-down resistor built in)    |
|           | b                  | Active 'High' (no pull-down resistor built in) |
|           | c                  | Active 'Low' (pull-up resistor built in)       |
|           | d                  | Active 'Low' (no pull-up resistor built in)    |
| ③         | a                  | Representative programmable                    |
| ④         | Defined within the | Custom Production                              |

## Block Diagram

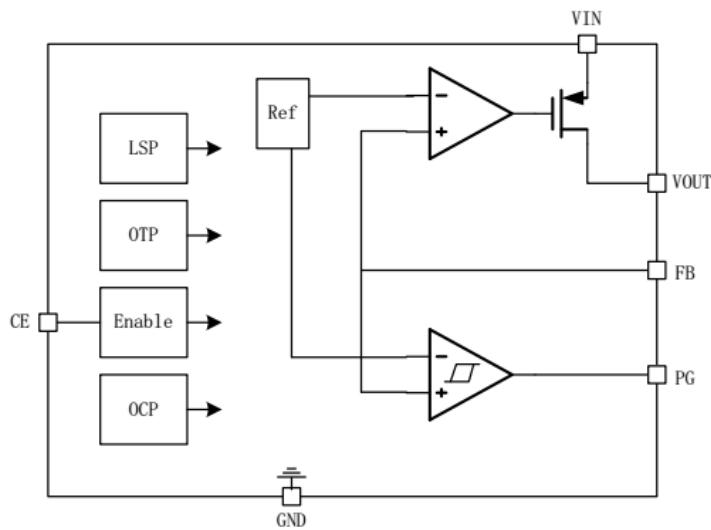


## Pin Configuration

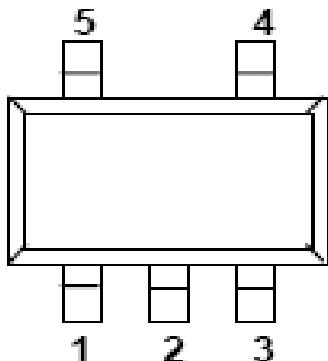

## Pin Assignment

| Pin Number | Pin Name | Function       |
|------------|----------|----------------|
| SOT23-5L   |          |                |
| 1          | VIN      | Supply Power   |
| 2          | VSS      | Ground         |
| 3          | CE       | Enable Pin     |
| 4          | FB       | Feedback       |
| 5          | VOUT     | Voltage Output |

### Typical Application Circuit

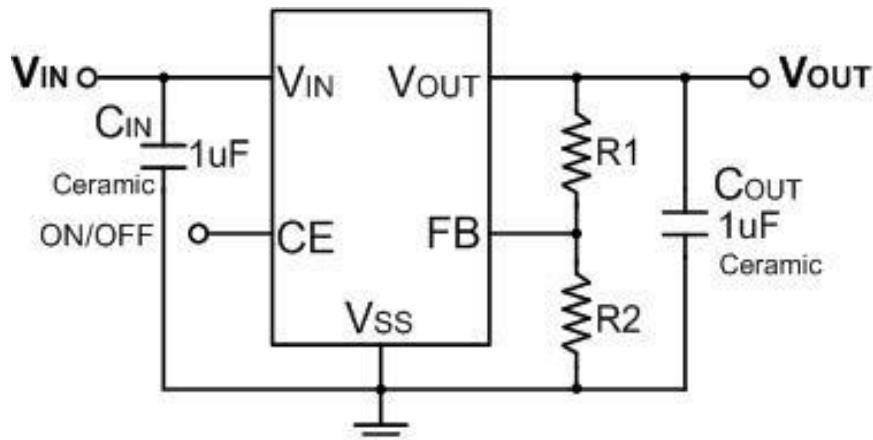

**Caution:** The above connection diagram and constant will not guarantee successful operation. Perform thorough evaluation using the actual application to set the constant.

$$V_{out} = (1 + R_1/R_2) \times 0.8, \quad R_1 \text{ and } R_2 \text{ must GT } 100\text{k}\Omega.$$

### Absolute Maximum Ratings

| Parameter                     | Symbol           | Maximum Rating                            |     | Unit |  |
|-------------------------------|------------------|---|-----|------|--|
| Input Voltage                 | V <sub>IN</sub>  | V <sub>SS</sub> -0.3~V <sub>SS</sub> +6   |     | V    |  |
| Enable Voltage                | V <sub>C/E</sub> | V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3 |     |      |  |
| Feedback Voltage              | V <sub>FB</sub>  | V <sub>SS</sub> -0.3~V <sub>IN</sub> +0.3 |     |      |  |
| Output Voltage                | V <sub>OUT</sub> | V <sub>SS</sub> -0.3~V <sub>IN</sub>      |     |      |  |
| Power Dissipation             | P <sub>D</sub>   | SOT23-5L                                  | 350 | mW   |  |
| Operating Ambient Temperature | T <sub>opr</sub> | -40~+85                                   |     | °C   |  |
| Storage Temperature           | T <sub>stg</sub> | -40~+125                                  |     |      |  |

**Caution:** The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.


### Electrical Characteristics

| Parameter                                  | Symbol  | Conditions  | Min. | Typ. | Max. | Unit       |
|--|---|---|------|------|------|------------|
| Feedback Voltage                           | V <sub>FB</sub>                                       | V <sub>IN</sub> =4.2V,V <sub>out</sub> =3.3V,I <sub>OUT</sub> =30mA   | 790  | 800  | 810  | mV         |
| Output Current                             | I <sub>OUT</sub>                                      | V <sub>IN</sub> ≥V <sub>OUT(S)</sub> +1.0V  | 300  | -    | -    | mA         |
| Dropout Voltage                            | V <sub>drop</sub>                                     | I <sub>OUT</sub> =50 mA   | -    | 0.12 | 0.20 | V          |
|  |   | I <sub>OUT</sub> =100 mA  | -    | 0.30 | 0.45 |            |
| Line Regulations                           | $\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$ | V <sub>OUT(S)</sub> +0.5 V≤V <sub>IN</sub> ≤7V<br>I <sub>OUT</sub> =30mA                                      | -    | 0.10 | 0.20 | %/V        |
| Load Regulation                            | V <sub>OUT 2</sub>                                    | V <sub>IN</sub> =V <sub>OUT(S)</sub> +1.0 V<br>1.0mA≤I <sub>OUT</sub> ≤100mA                                  | -    | 50   | 100  | mV         |
| Output Voltage Temperature Characteristics | $\frac{\Delta V_{OUT}}{Ta \times V_{OUT}}$            | V <sub>IN</sub> =V <sub>OUT(S)</sub> +1.0 V,<br>I <sub>OUT</sub> =10 mA<br>-40°C≤Ta≤85°C                      | -    | ±100 | -    | ppm/<br>°C |
| Supply Current                             | I <sub>SS1</sub>                                      | V <sub>IN</sub> =V <sub>OUT(S)</sub> +1.0 V   | -    | 30   | 40   | µA         |
| Shutdown Current                           | I <sub>shut</sub>                                     | V <sub>IN</sub> =5 V,V <sub>C E</sub> =0  |      |      | 0.1  | µA         |
| Input Voltage                              | V <sub>IN</sub>                                       | —   | 2.0  | -    | 8    | V          |
| Ripple-Rejection                           | PSRR  | V <sub>IN</sub> =V <sub>OUT(S)</sub> +1.0 V,<br>f=1kHz V <sub>rip</sub> =0.5 Vrms,<br>I <sub>OUT</sub> =50 mA | -    | 50   | -    | dB         |
| Short-circuit Current                      | I <sub>short</sub>                                    | V <sub>IN</sub> =V <sub>OUT(S)</sub> +1.0V,<br>ON/OFF Terminal is ON,V <sub>OUT</sub> =0V                     | -    | 30   | -    | mA         |
| CE “High Voltage                           | V <sub>C EH</sub>                                     |   | 0.8  |      |      | V          |
| CE “Low” Voltage                           | V <sub>C EL</sub>                                     |   |      |      | 0.75 | V          |
| CE “High Current                           | I <sub>C EH</sub>                                     | V <sub>IN</sub> =V <sub>C E</sub> =V <sub>OUT(T)</sub> +1V  | -0.1 |      | 0.1  | µA         |
| CE “Low” Current                           | I <sub>C EL</sub>                                     | V <sub>IN</sub> =V <sub>OUT(T)</sub> +1V,<br>V <sub>C E</sub> =V <sub>S S</sub>                               | -0.1 |      | 0.1  | µA         |

**Typical Performance Characteristics (Output 3.3V)**


### 1、The input voltage transient response

Test Conditions: Vin=4.3V-5.3V, Iout=10mA, Cin=Cout=1uF

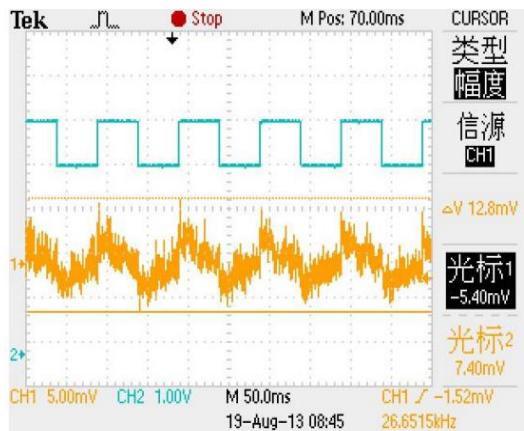


### 2、Ripple rejection

Test Conditions: Vin=4.3V-5.3V, Iout=10mA, Cin=Cout=1uF

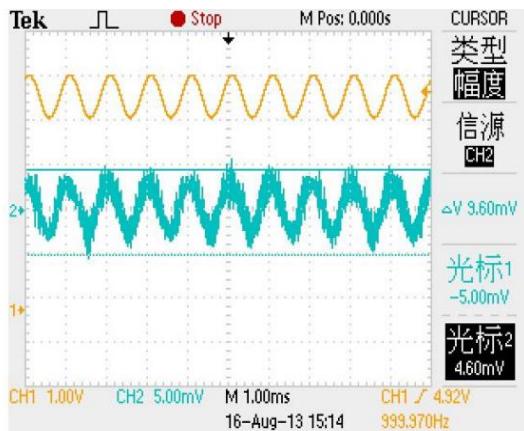


### 3、The load transient response

Test Conditions: Vin=CE=4.3V, Cin=Cout=1uF, Iout=0-100mA

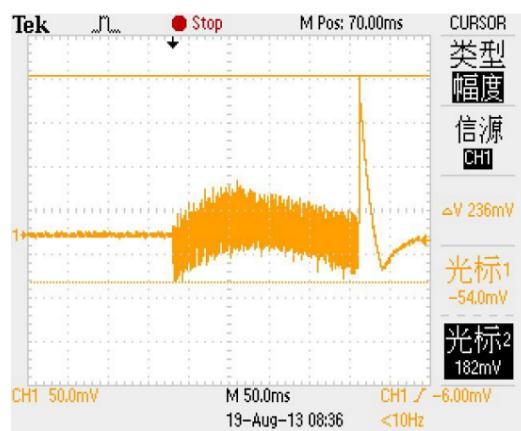


### 4、The output voltage temperature curve

Test Conditions: Vin=CE=4.3V, Cin=Cout=1uF, Iout=10mA

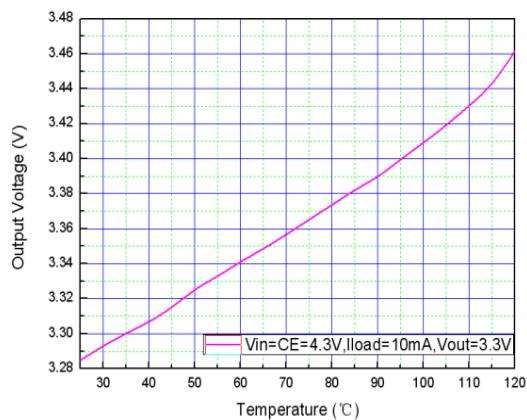

### 5、Overshoot


Test Conditions: Vin=0V-4.3V, Iout=0mA, Cin=Cout=1uF

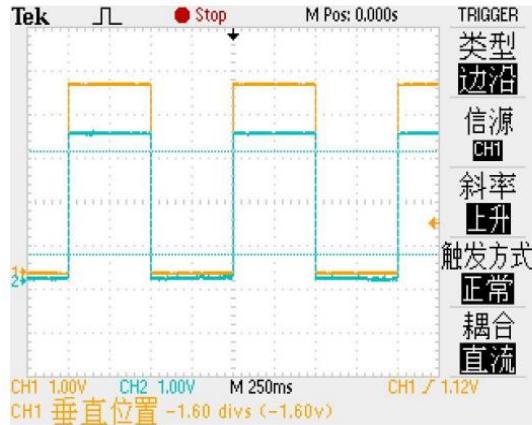

Channel 1 input, channel 2 Output

## Package Information

## ● SOT23-5L

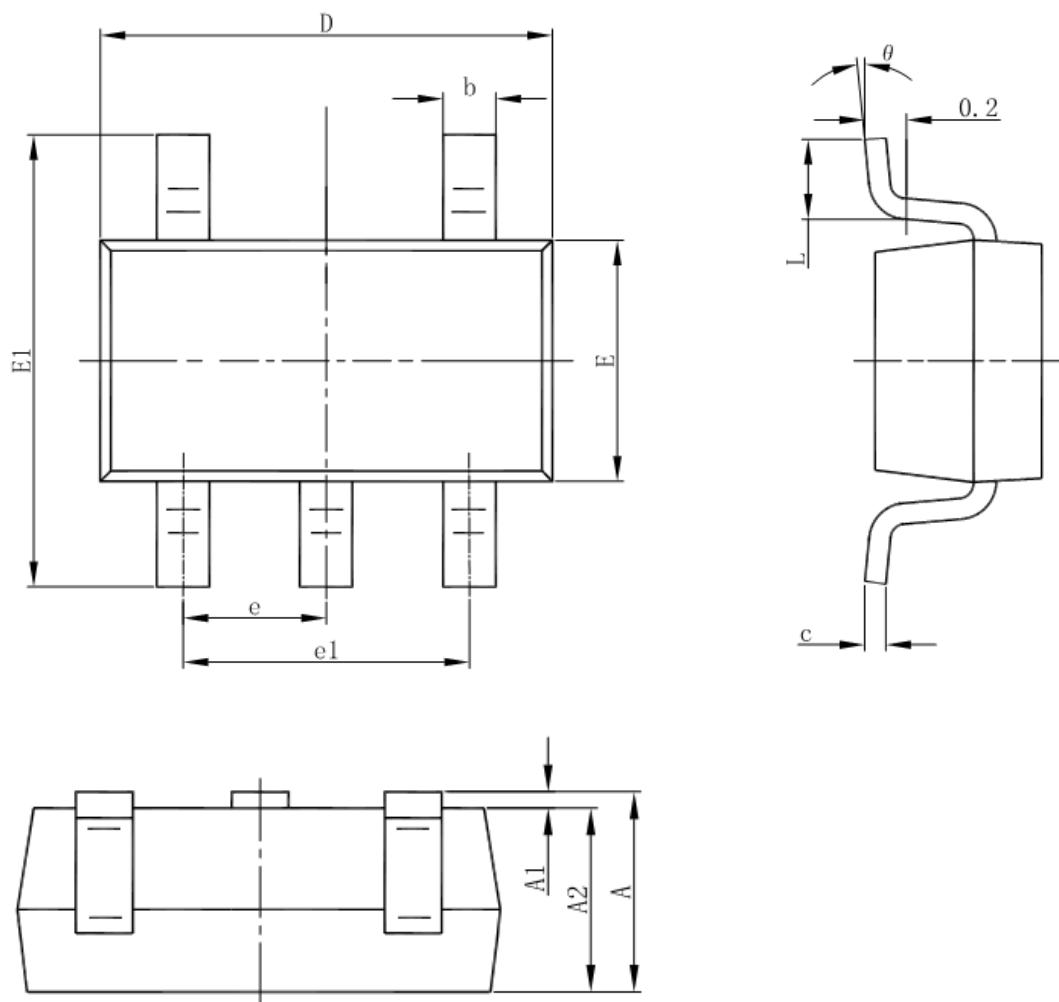

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.050                     | 1.250 | 0.041                | 0.049 |
| A1     | 0.000                     | 0.100 | 0.000                | 0.004 |
| A2     | 1.050                     | 1.150 | 0.041                | 0.045 |
| b      | 0.300                     | 0.500 | 0.012                | 0.020 |
| c      | 0.100                     | 0.200 | 0.004                | 0.008 |
| D      | 2.820                     | 3.020 | 0.111                | 0.119 |
| E      | 1.500                     | 1.700 | 0.059                | 0.067 |
| E1     | 2.650                     | 2.950 | 0.104                | 0.116 |
| e      | 0.950(BSC)                |       | 0.037(BSC)           |       |
| e1     | 1.800                     | 2.000 | 0.071                | 0.079 |
| L      | 0.300                     | 0.600 | 0.012                | 0.024 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

## Special Version

The company reserves the right of final interpretation of this specification.

## Version Change Description

---

Versions: V1.5

Writer: Xin CHun Li

Time: 2021.10.15

Amendant record:

- 1.Re-typesetting the manual and checking some data