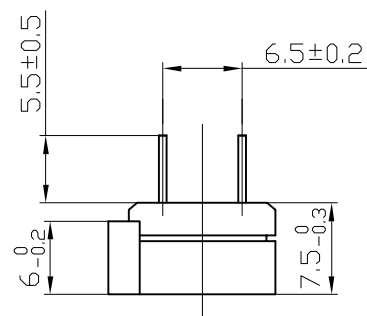



SPECIFICATION

1. Rated Voltage.....1.5V
2. Operating Voltage.....1-2V
3. Max. Rated Current.....70mA
4. Coil Resistance..... $6.5 \pm 1 \Omega$
5. Coil Impedance22 Ω
6. Min. Sound Pressure Level.....80dB/10cm
7. Resonant Frequency.....2048Hz
8. Case Material.....MPPO
9. Operating Temperature.....-20~+70°C
10. Store Temperature.....-30~+80°C
11. Weight.....2g

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
No.	DESCRIPTION	APPROVED	DATE	Magnetic buzzer KP12-04A1			
TOLERANCES UNLESS NOTED OTHERWISE .X = .XX = .XXX = 90° FORMED +2° ANGLES -1°		APPROVALS	DATE				
FIRST ANGLE PROJECTION		DRAWN		mm	KP3.843.672		
		CHECKED		SCALE	NOT TO SCALE	SHEET	
APPROVED			05.08.01			VER 1.0	