



1 2 3 4 5 6 7 8


A




B



C

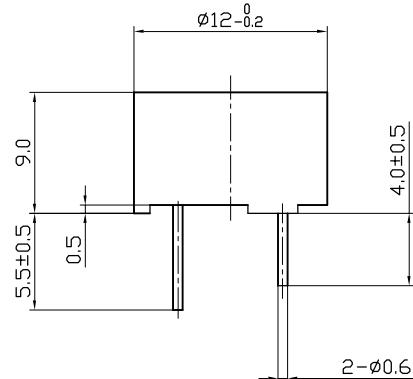

D



E

F

SPECIFICATION

- 1.Rated Voltage 1.5 V
- 2.Operating Voltage 1~2 V
- 3.Max.Rated Current 70mA
- 4.Coil Resistance 6.5±1 Ω
- 5.Coil Impedance 16 Ω
- 6.Min.Sound Pressure Level 80dB/10cm
- 7.Resonant Frequency 2400Hz
- 8.Case Material PBT
- 9.Operating Temperature -20~+70°C
- 10.Store Temperature -30~+80°C
- 11.Weight 2g

No.	DESCRIPTION	APPROVED	DATE
X	TOLERANCES UNLESS NOTED OTHERWISE	APPROVALS	DATE
XX	±	DRAWN	
XXX	±	CHECKED	
	90° FORMED +2° ANGLES -1°	APPROVED	05.03.19
	FIRST ANGLE PROJECTION	SCALE	NOT TO SCALE
		SHEET	VER 1.2
UNIT	DWG NO.	KP3.840.676	
mm			

KEPO NINGBO KEPO ELECTRONIC CO.,LTD
http://www.chinaacoustic.com

Magnetic Buzzer
KPM-1201A

1 2 3 4 5 6 7 8