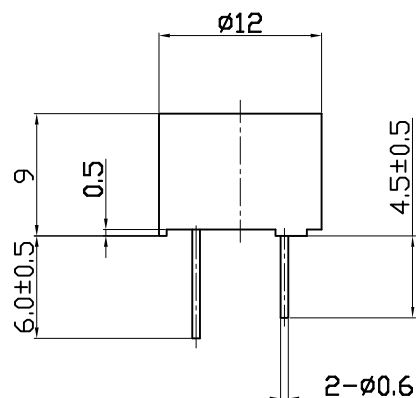



SPECIFICATION

1. Rated Voltage 1.5 V
2. Operating Voltage 1~2 V
3. Max. Rated Current 10mA
4. Coil Resistance $45 \pm 5 \Omega$
5. Coil Impedance 125Ω
6. Min. Sound Pressure Level 70dB/10cm
7. Resonant Frequency 2400Hz
8. Case Material PBT
9. Operating Temperature $-20 \sim +70^{\circ}\text{C}$
10. Store Temperature $-30 \sim +80^{\circ}\text{C}$
11. Weight 2g

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
				Magnetic Buzzer			
				KPM-1201A6			
No.	DESCRIPTION	APPROVED	DATE				
TOLERANCES UNLESS NOTED OTHERWISE: .X .X .XX .XX .XXX .XXX 90° FORMED +2° ANGLES -4° FIRST ANGLE PROJECTION		APPROVALS		DATE			
		DRAWN			UNIT	DWG NO.	
		CHECKED			mm	KP3.840.682	
		APPROVED		05.03.21	SCALE	NOT TO SCALE	VER 1.0