


SPECIFICATION

- 1. Rated Voltage12V
- 2. Operating Voltage6~18V
- 3. Max. Rated Current40mA
- 4. Coil Resistance115±12 Ω
- 5. Coil Impedance.....200 Ω
- 6. Min. Sound Pressure Level85dB/10cm
- 7. Resonant Frequency.....2048Hz
- 8. Case MaterialMPPO
- 9. Operating Temperature-30~+80℃
- 10. Store Temperature-40~+85℃
- 11. Weight7g

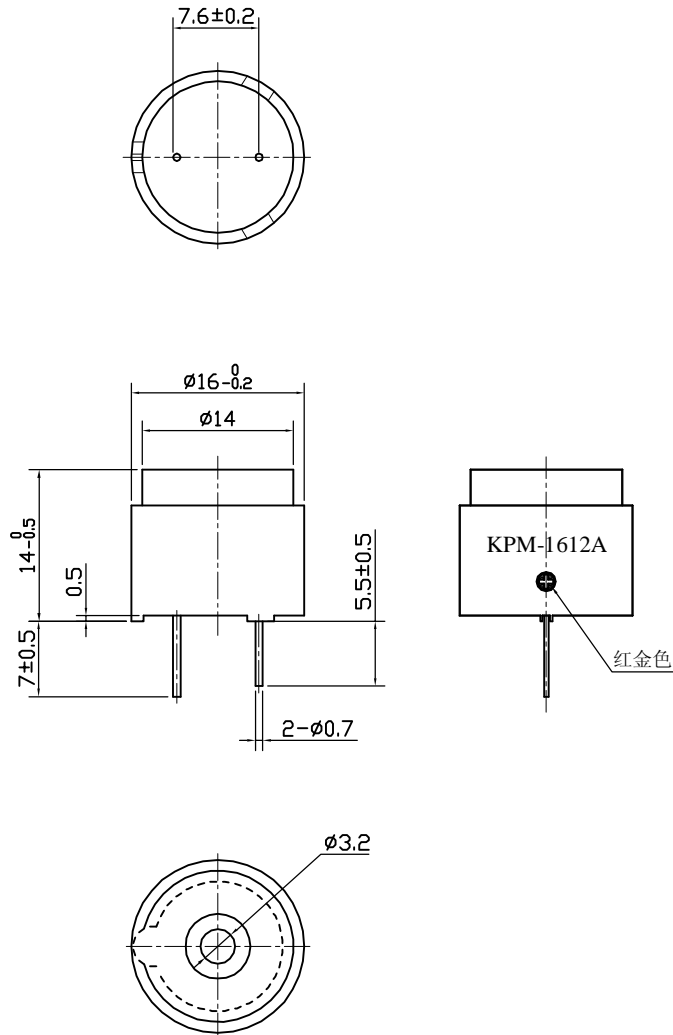

			KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
			Magnetic Buzzer KPM-1612A	
No.	DESCRIPTION	APPROVED	DATE	
TOLERANCES UNLESS NOTED OTHERWISE: X ± XX + XXX ± 90° FORMED ±2° ANGLES ±5°		APPROVALS		
		DRAWN		
		CHECKED		
FIRST ANGLE PROJECTION		APPROVED	05.05.11	SCALE NOT TO SCALE
		UNIT mm		DWG NO. KP3.840.685
			SHEET	VER 1.2