

1

2

3

4

5

6

7

8

A

A

B

B

C

C

D





D

E

E

F

F

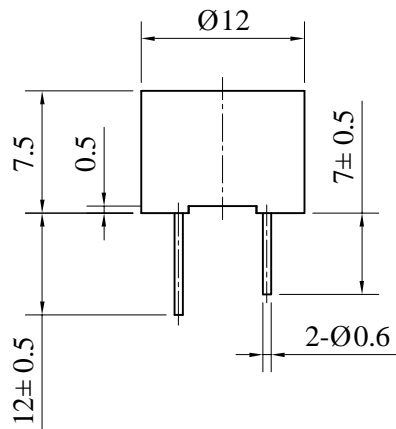

SPECIFICATION

- 1. Rated Voltage 1.8 VDC
- 2. Operating Voltage 1.6~3 VDC
- 3. Max. Rated Current 20mA/1.8VDC
- 4. Min. Sound Pressure Level 75dB/10cm
- 5. Resonant Frequency 3100±500Hz
- 6. Response Time 50ms
- 6. Case Material PBT
- 7. Operating Temperature -20~+70°C
- 8. Store Temperature -30~+80°C
- 9. Weight 2g

| | | | | | |
|--|-------------|-----------|----------|---|--------------|
| | | | | KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com | |
| | | | | Magnetic Buzzer KPX-1201B1 | |
| No. | DESCRIPTION | APPROVED | DATE | | |
| <small> TOLERANCES UNLESS NOTED OTHERWISE: .X * .XX * .XXX * 90° FORMED +2° ANGLES ±1° FIRST ANGLE PROJECTION </small> | | APPROVALS | | DATE | |
| | | DRAWN | | | |
| | | CHECKED | | UNIT | DWG NO. |
| | | APPROVED | | mm | KP3.840.716 |
| | | | 05.07.05 | SCALE | NOT TO SCALE |
| | | | | SHEET | VER 1.1 |

1

2

3

4

5

6

7

8