

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D





D

E

E

F

F

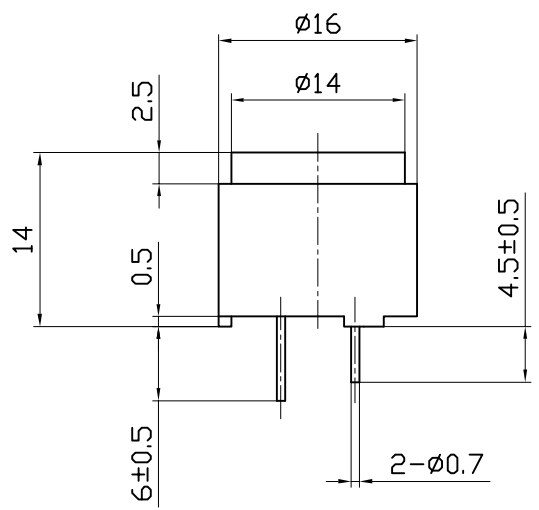

SPECIFICATION

- 1. Rated Voltage12 VDC
- 2. Operating Voltage8~15VDC
- 3. Max. Rated Current30mA/12VDC
- 4. Resonant Frequency2300±300Hz
- 5. Min. Sound Pressure Level.....85dB/10cm
- 6. Response Time50ms
- 7. Case MaterialMPPO
- 8. Operating Temperature-20~+70°C
- 9. Store Temperature-30~+80°C
- 10. Weight7g

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com	
				Magnetic Buzzer	
				KPX-1612A	
No.	DESCRIPTION	APPROVED	DATE		
<small>TOLERANCES UNLESS NOTED OTHERWISE: .X * .XX * .XXX * 90° FORMED ±2° ANGLES ±1° FIRST ANGLE PROJECTION</small>		APPROVALS		DATE	
		DRAWN			
		CHECKED		UNIT	DWG NO.
		APPROVED	05.04.26	mm	KP3.840.659
				SCALE	SHEET
				NOT TO SCALE	VER 1.1

1 2 3 4 5 6 7 8