


SPECIFICATION

- 1. Rated Voltage10Vp-p
- 2. Max. Rated Input Voltage30Vp-p
- 3. Rated Frequency Range2.5-60KHz
- 4. Rated Sensitivity92±3dB/w.10cm
- 5. Case MaterialPBT
- 6. Operating Temperature-20~+70 °C
- 7. Store Temperature-30~+80 °C
- 8. Weight10g

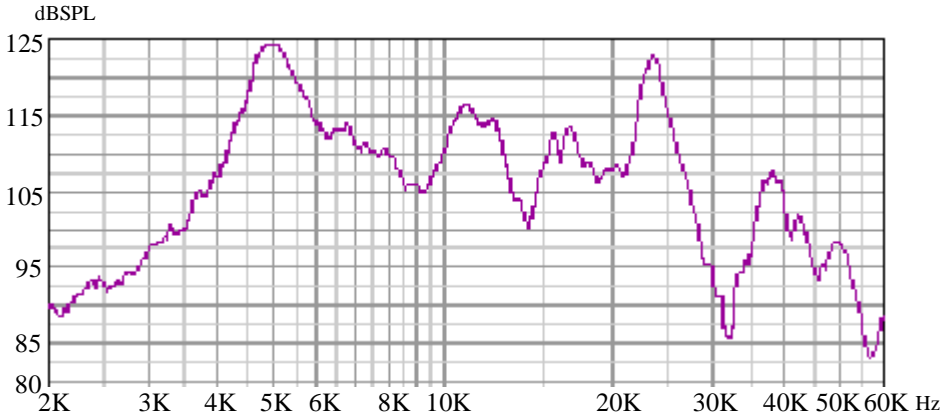

				KEPO NINGBO KEPO ELECTRONIC CO.,LTD http://www.chinaacoustic.com			
				Ultra Sonic Transducer			
				PCT-5100			
No.	DESCRIPTION	APPROVED	DATE	UNIT			
<small> TOLERANCES UNLESS NOTED OTHERWISE: .X * .XX * .XXX * 90° FORMED ±2° ANGLES ±1° FIRST ANGLE PROJECTION </small>		APPROVALS		DATE	DWG NO.		
		DRAWN			mm	KP3.840.509	
		CHECKED			SCALE	SHEET	VER
		APPROVED		05.03.19	NOT TO SCALE		1.3