

1 2 3 4 5 6 7 8

A

A

B

B

C

C

D





D

E

E

F

F

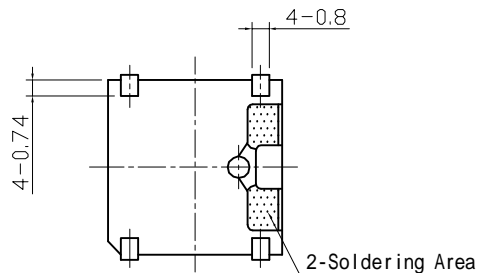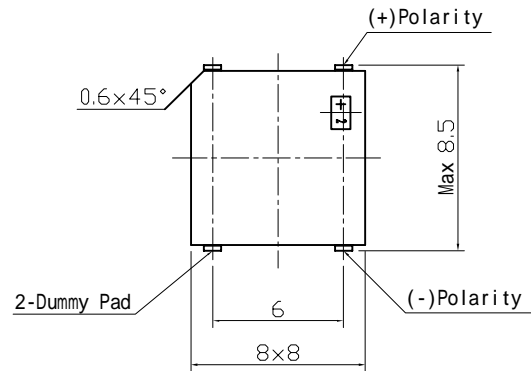

# SPECIFICATION

- 1. Rated Voltage .....3.6V
- 2. Operating Voltage .....2~5V
- 3. Max. Rated Current .....90mA
- 4. Resonant Frequency .....2670Hz
- 5. Min. Sound Pressure Level.....85dB/10cm
- 6. Coil Resistance .....16±3Ω
- 7. Case Material .....PPS
- 8. Operating Temperature .....-30~+70°C
- 9. Store Temperature .....-40~+85°C
- 10. Weight .....1g

				<b>KEPO</b> NINGBO KEPO ELECTRONIC CO.,LTD <a href="http://www.chinaacoustic.com">http://www.chinaacoustic.com</a>		
No.		DESCRIPTION	APPROVED	DATE	<b>Magnetic Buzzer</b> <b>SMT-8030B</b>	
			APPROVALS	DATE		
<small>           TOLERANCES UNLESS NOTED OTHERWISE:            .X *            .XX *            .XXX *            90° FORMED ±2°            ANGLES ±1°            FIRST ANGLE PROJECTION         </small>		DRAWN			UNIT	DWG NO.
		CHECKED			mm	KP3.840.858
		APPROVED		05.05.11	SCALE	NOT TO SCALE

1 2 3 4 5 6 7 8