

Connector

MINI DIN JACK Series




KLS1-285L Mini din jack With Shell Series

MATERIAL

Insulator: PBT UL 94V-0 or PPS
Shell: Brass, Nickel / Tin Plated or Tin Plated
Contact: Phosphor Bronze, Gold / Tin plated
ENVIRONMENTAL
Operating Temperature: -25°C ~ + 70°C

ELECTRICAL

Contact current Rating: 1 Amp/100VAC
2Amp/12VDC
Dielectric Withstanding: AC 1000V / min.
Insulation Resistance: 5000M OHM min AT 500V DC
Contact Resistance: 30m ohm Max.
Insertion force: 4.5Kgf Max
Withdrawal Force: 0.8Kgf Min
Life: 5000 cycles

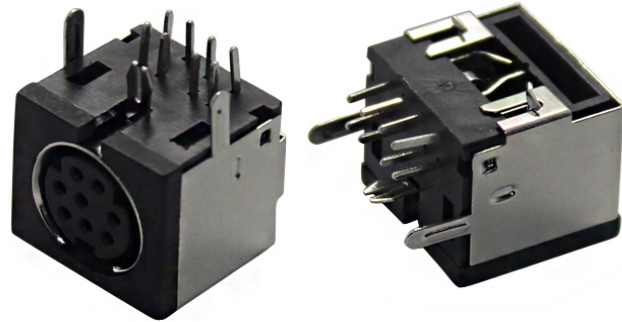

| | | | |
|-------------------------|---|---|---|
| ARRANGEMENT OF CONTACTS | | | |
| NO. OF CONTACTS | 3 | 4 | 5 |
| PCB LAYOUT | | | |
| ARRANGEMENT OF CONTACTS | | | |
| NO. OF CONTACTS | 6 | 7 | 8 |
| PCB LAYOUT | | | |

ORDER INFORMATION

Product NO.: KLS1 - 285L - 4 B

Pos. NO. _____
Mini DIN JACK With Shell Series _____
Pin Number: _____
3=3P 4=4P 5=5P 6=6P 7=7P 8=8P
Color: B=Black G=Green _____