


**SPECIFICATION**

Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric Voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C

**MATERIAL**


Insulator:Polyester,UL 94V-0  
 Standard:PBT or Nylon 6T  
 Contact Pin:Copper Alloy  
 Contact Plating:Gold Flash all over

Standart height (H) = 2.5






**PLD-xxS**

**Pin Header 2.54mm 2 Row H=1.5/1.7/2.5mm SMT Type**

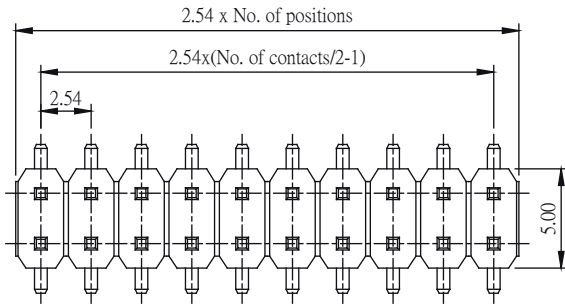




	Code	Dim A	Dim B	Dim C		
				H=1.5	H=1.7	H=2.5
Dual row	600	6.00	11	2.3	2.5	3.3
	800	8.00	11			

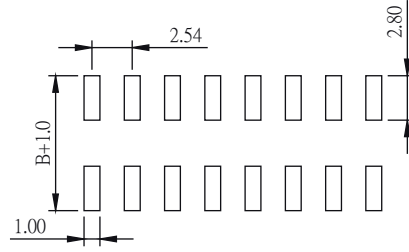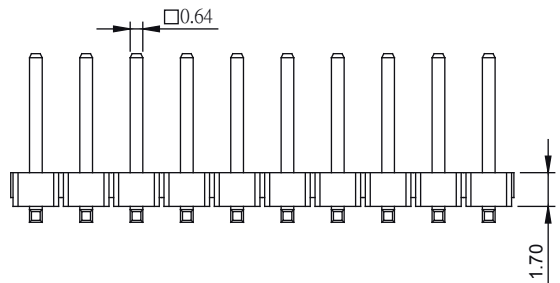


Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

**PLHD-xxSP**

**Pin Header 2.54mm 2 Row H=1.5/1.7/2.5mm Stack SMT Type**

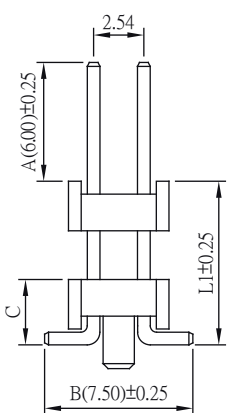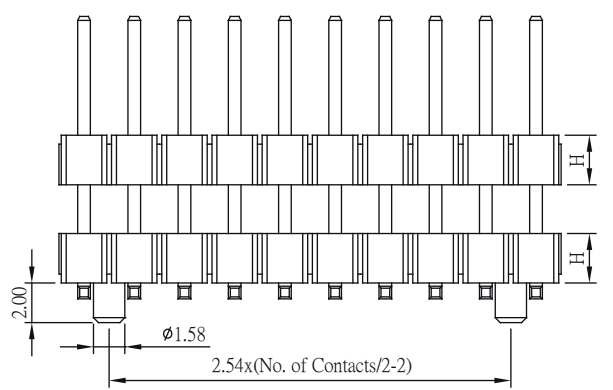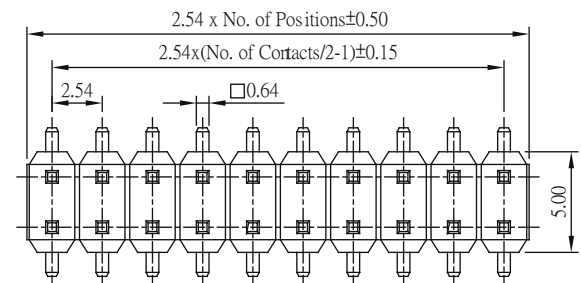

	Dim. C
H=1.5mm	2.30
H=1.7mm	2.50
H=2.5mm	3.30



Recommended PCB Layout  
(PCB TOLERANCE ±0.05)