

**SPECIFICATION**






Current Rate:1.5 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C

**MATERIAL**

Insulator:Polyester,UL 94V-0  
 Standard:Nylon 6T  
 Contact Pin:Copper Alloy  
 Contact Plating:Gold Flash all over

**PLS2-xT**

Pin Header 2.0mm 1 Row H=1.5/2.0mm SMT R/A Type

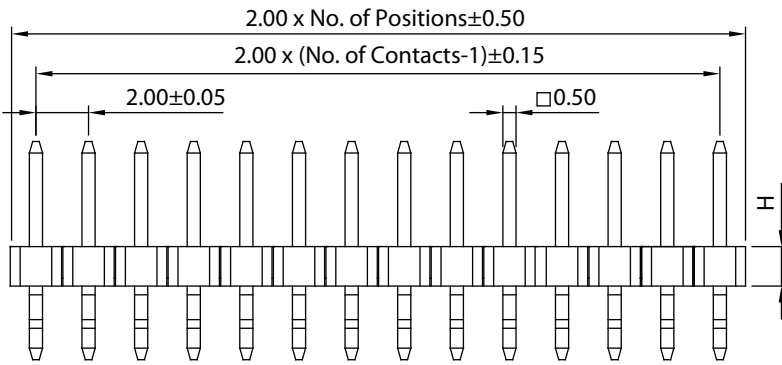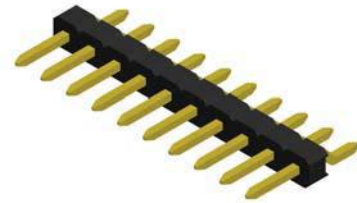

**PLD2-xT**

Pin Header 2.0mm 2 Row H=1.5/2.0mm SMT R/A Type

