

SB520 THRU SB5A0

SCHOTTKY BARRIER RECTIFIERS


Reverse Voltage – 20 to 100 Volts

Forward Current – 5.0 Amperes

DO-201AD

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction, majority carrier conduction
- Guard ring for overvoltage protection
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 250° /10 seconds at terminals, 0.375"(9.5mm) lead length, 5lb.(2.3kg) tension

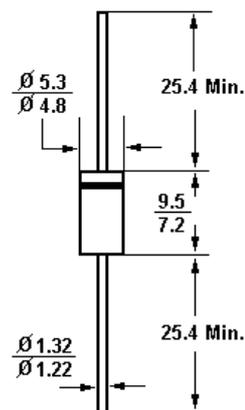

Dimensions in mm

Mechanical Data

- Case: Molded plastic body, JEDEC DO-201AD.
- Terminals: Axial leads, solderable per MIL-STD-750, method 2026
- Polarity: Color band denotes cathode end.
- Mounting Position: Any

Absolute Maximum Ratings and Characteristics


Ratings at 25°C ambient temperature unless otherwise specified. Single phase, half wave, resistive or inductive load. For capacitive load, derate by 20%

	Symbols	SB 520	SB 530	SB 540	SB 550	SB 560	SB 580	SB 5A0	Units
Maximum recurrent peak reverse voltage	V_{RRM}	20	30	40	50	60	80	100	V
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	57	71	V
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	100	V
Maximum average forward rectified current 0.375" (9.5mm) lead length	$I_{(AV)}$	5.0							A
Peak forward surge current 8.3mS single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	150							A
Maximum instantaneous forward voltage at 5 A (Note 1)	V_F	0.55		0.70		0.80	0.85	V	
Maximum reverse current at rated reverse voltage (Note 1)	I_R	2.5							mA
$T_A = 25^{\circ}C$ $T_A = 100^{\circ}C$		50			25				
Typical junction capacitance (Note 2)	C_{tot}	500			400				pF
Typical thermal resistance, from junction to ambient (Note 3)	$R_{\theta JA}$	25							°C/W
Typical thermal resistance, from junction to lead (Note 3)	$R_{\theta JL}$	8.0							°C/W
Operating junction temperature range	T_J	-65 to +125			-65 to +150				°C
storage temperature range	T_S	-65 to +150							°C

Notes: (1) Pulse test: 300µ s pulse width, 1% duty cycle

(2) Measured at 1MHz and applied reverse voltage of 4 Volts

(3) Thermal Resistance from Junction to lead vertical P.C.B, mounted with 0.375"(9.5mm) lead length




®

РАДИОТЕХ


Тел.: (495) 795-0805
Факс: (495) 234-1603
Эл. почта: info@rct.ru
Веб: www.rct.ru

SB520 THRU SB5A0


Forward Current Derating Curve

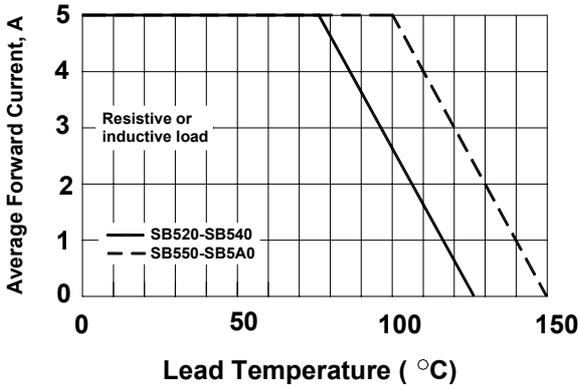


Maximum non-repetitive peak forward surge current

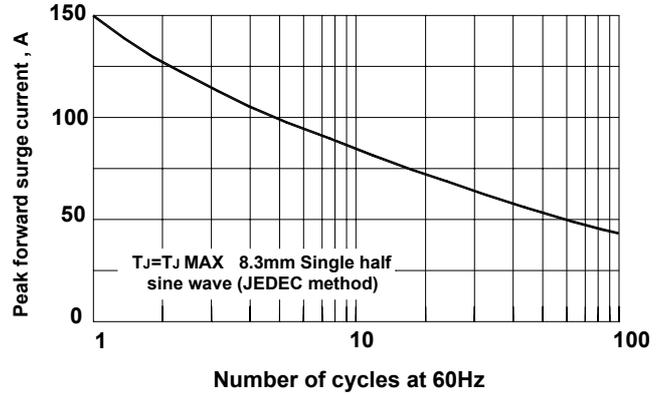


Typical instantaneous forward characteristics

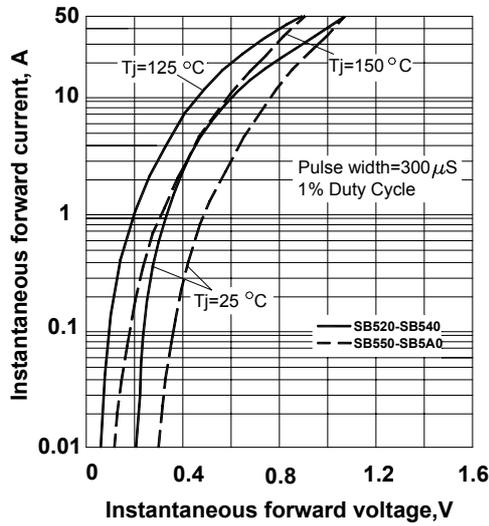



Typical reverse characteristics

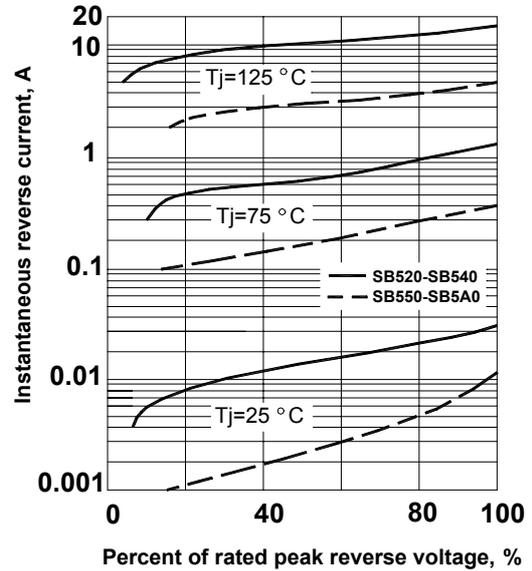

TYPICAL JUNCTION CAPACITANCE

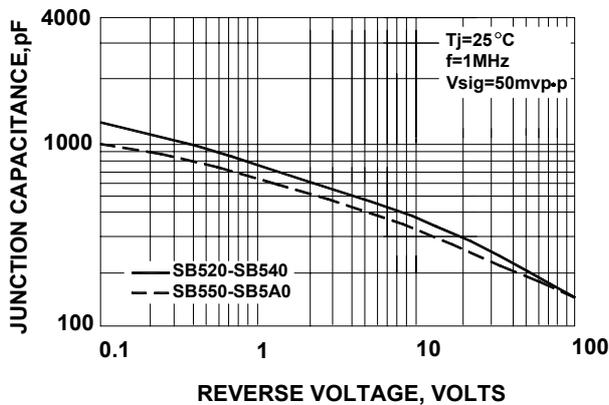


TYPICAL TRANSIENT THERMAL IMPEDANCE

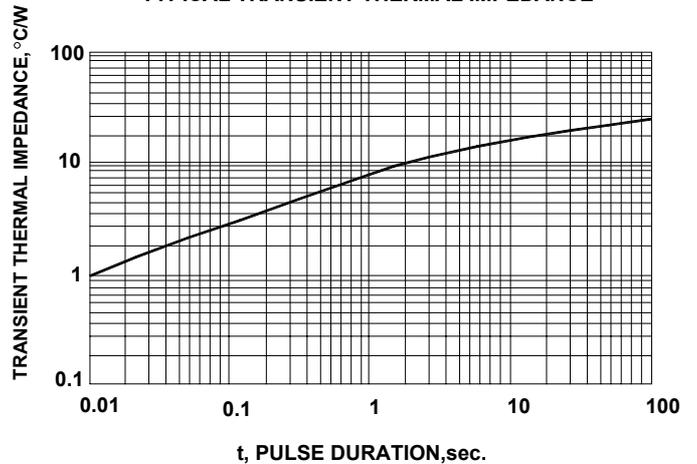

SEMTECH ELECTRONICS LTD.

(Subsidiary of Semtech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 19/05/2003