



WE05D5BC

Transient Voltage Suppressor

Features

- Small Body Outline Dimensions:
0.059" x 0.026" (1.5 mm x 0.65 mm)Max
- Low Body Height: 0.026" (0.65 mm) Max
- Protects one line
- Working Voltage: 5 V
- Low Leakage Current
- Response Time is Typically < 1 ns



SOD-523

IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD) ±15kV (air), ±8kV (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)


Mechanical Characteristics

- JEDEC SOD-723 package
- Molding compound flammability rating:
UL 94V-0
- Marking: Marking Code
- Packaging: Tape and Reel per EIA 481
- RoHS/WEEE Compliant

Applications

- Cellular Handsets & Accessories
- Personal Digital Assistants (PDAs)
- Notebooks & Handhelds
- Portable Instrumentation
- Digital Cameras
- MP3 Players

Schematic & PIN Configuration

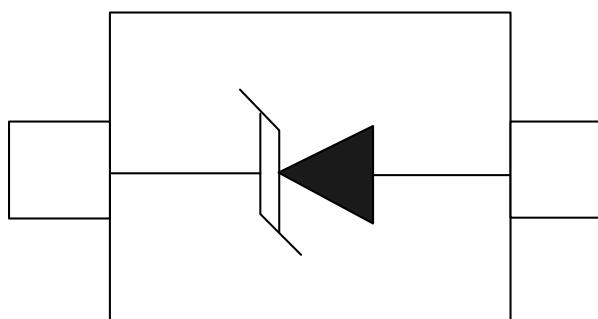


SOD-523 (Top View)

Absolute Maximum Rating

Rating	Symbol	Value	Units
Peak Pulse Power ($t_p = 8/20\mu s$)	P_{PP}	100	Watts
Peak Forward Voltage ($I_F = 1A, t_p=8/20\mu s$)	V_{FP}	1.5	V
Operating Temperature	T_J	-55 to +125	°C
Storage Temperature	T_{STG}	-55 to +150	°C

Electrical Parameters (T=25°C)

Symbol	Parameter
I_{PP}	Maximum Reverse Peak Pulse Current
V_C	Clamping Voltage @ I_{PP}
V_{RWM}	Working Peak Reverse Voltage
I_R	Maximum Reverse Leakage Current @ V_{RWM}
V_{BR}	Breakdown Voltage @ I_T
I_T	Test Current
I_F	Forward Current
V_F	Forward Voltage @ I_F

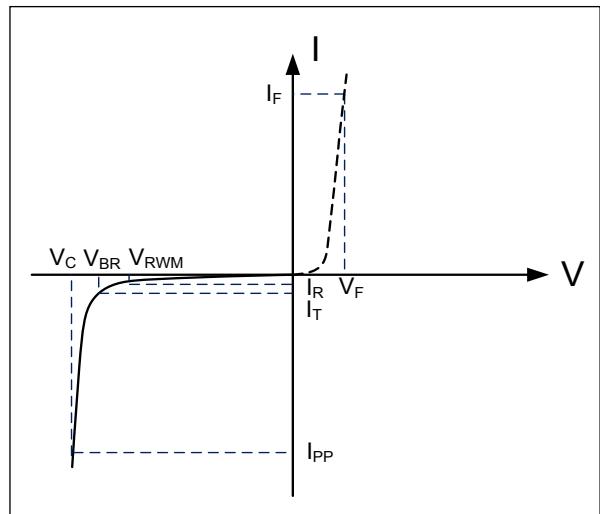

Electrical Characteristics

WE05D5BC						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	V_{RWM}				5.0	V
Reverse Breakdown Voltage	V_{BR}	$I_T=1mA$	6.0			V
Reverse Leakage Current	I_R	$V_{RWM}=5V, T=25°C$			1	µA
Peak Pulse Current	I_{PP}	$t_p = 8/20\mu s$			6.5	A
Clamping Voltage	V_C	$I_{PP}=1A, t_p=8/20\mu s$			9.5	V
Clamping Voltage	V_C	$I_{PP}=6.5A, t_p=8/20\mu s$		13.5	15	V
Junction Capacitance	C_j	$V_R = 0V, f = 1MHz$		20		pF

Typical Characteristics

Figure 1: Peak Pulse Power Vs Pulse Time

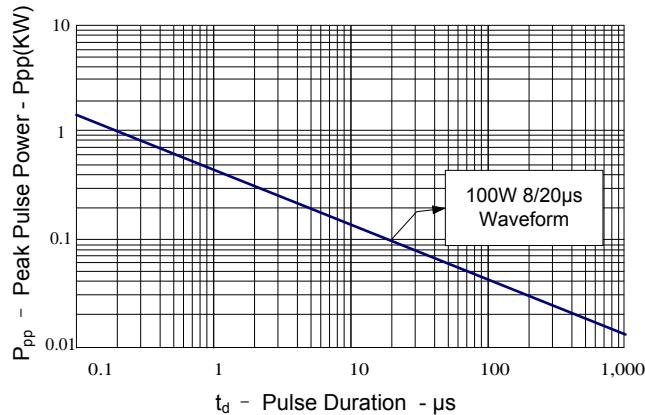


Figure 2: Power Derating Curve

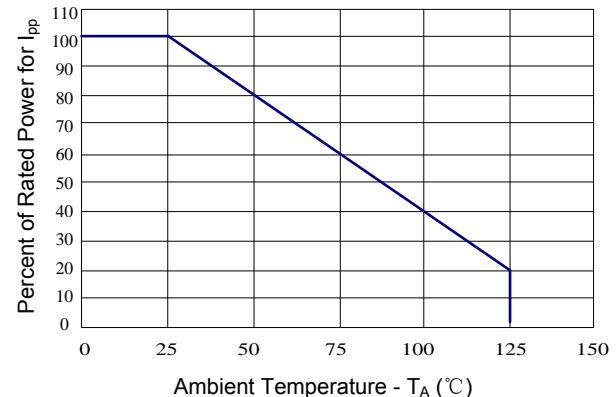


Figure 3: Clamping Voltage vs. Peak Pulse Current

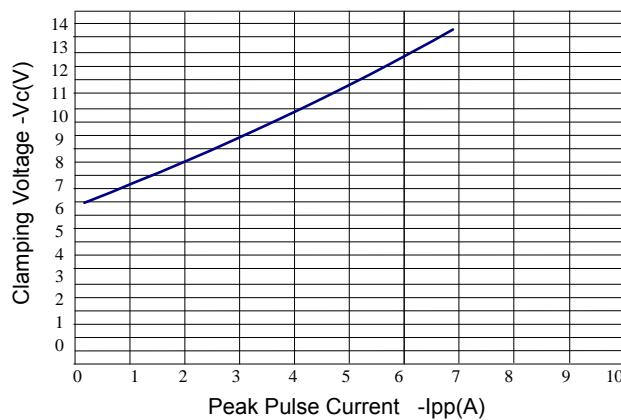


Figure 4: Normalized Junction Capacitance vs. Reverse Voltage

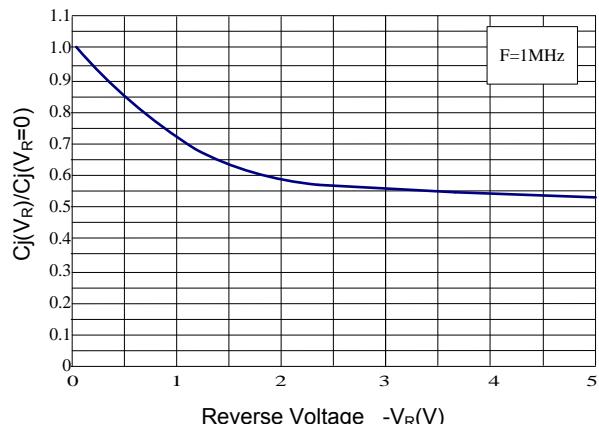


Figure 5: Pulse Waveform


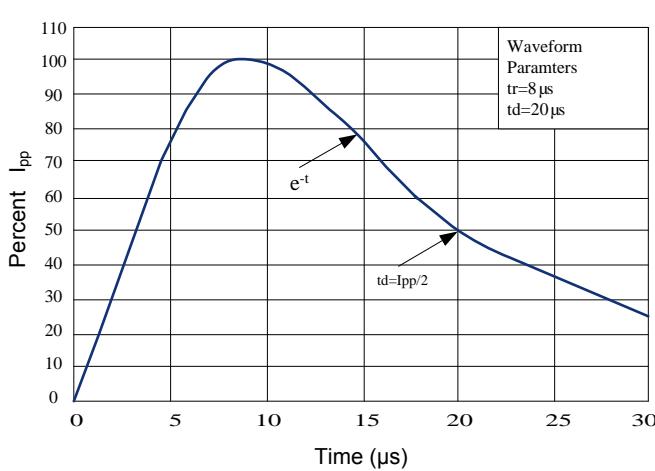



Figure 6: ESD Clamping(8kV Contact per IEC 61000-4-2)


Tek Run: 2.50GS/s Sample

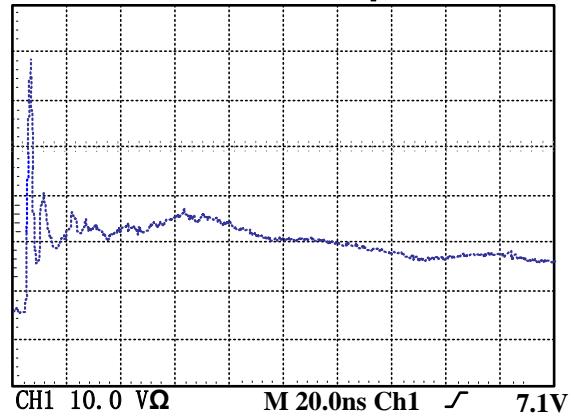

Outline Drawing – SOD-523

PACKAGE OUTLINE		DIMENSIONS			
SYMBOL		MILLIMETER		INCHES	
		MIN	MAX	MIN	MAX
A		0.50	0.70	0.020	0.028
b		0.25	0.35	0.010	0.014
C		0.07	0.20	0.0028	0.0079
D		1.10	1.30	0.043	0.051
E		0.70	0.90	0.028	0.035
H _E		1.50	1.70	0.059	0.067
L		0.15	0.25	0.006	0.010

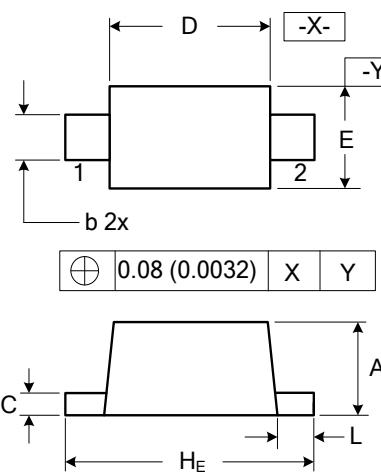 <p>Notes</p> <p>1. Controlling Dimensions in Millimeters. 2. Dimensions are exclusive of mold flash and metal burrs.</p>

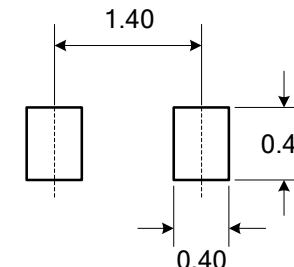

DIMENSIONS: MILLIMETERS

Marking Codes



Pin Style: 1. Cathode 2. Anode