


# WS2.8-8LVU

## Transient Voltage Suppressor

### Features

- 600 Watts peak pulse power ( $t_p=8/20\mu s$ )
- Protects Four Line Pairs (Eight lines)
- Low capacitance
- Low leakage current
- Low operating and clamping voltage
- Solid-state Punch through Avalanche TVS process technology

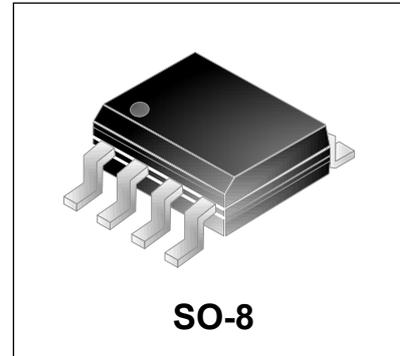

### IEC COMPATIBILITY (EN61000-4)

- IEC 61000-4-2 (ESD)  $\pm 15kV$  (air),  $\pm 8kV$  (contact)
- IEC 61000-4-4 (EFT) 40A (5/50ns)
- IEC 61000-4-5 (Lightning) 24A (8/20 $\mu s$ )


### Mechanical Characteristics

- JEDEC SO-8 package
- Molding compound flammability rating: UL 94V-0
- Marking: Marking Code
- Packaging: Tape and Reel
- RoHS/WEEE Compliant

### Applications

- Switching Systems
- WAN/LAN Equipment
- Desktops, Servers, Notebooks & Handhelds
- 10/100 Ethernet
- Base Stations
- Audio/Video Inputs

### Schematic & PIN Configuration

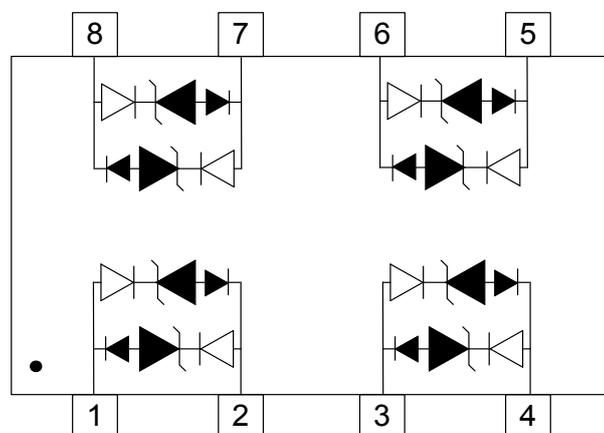


SO-8 (Top View)

<b>Absolute Maximum Rating</b>			
Rating	Symbol	Value	Units
Peak Pulse Power ( $t_p=8/20\mu s$ ) see Figure1& Figure2	$P_{PP}$	600	Watts
Peak Pulse Current ( $t_p=8/20\mu s$ )	$I_{PP}$	30	A
Lead Soldering Temperature	$T_L$	260(10sec)	°C
Operating Temperature	$T_J$	-55 to + 125	°C
Storage Temperature	$T_{STG}$	-55 to +150	°C

**Electrical Parameters (T=25°C)**

Symbol	Parameter
$I_{PP}$	Maximum Reverse Peak Pulse Current
$V_C$	Clamping Voltage @ $I_{PP}$
$V_{RWM}$	Working Peak Reverse Voltage
$I_R$	Maximum Reverse Leakage Current @ $V_{RWM}$
$V_{PT}$	Punch-through Breakdown Voltage @ $I_T$
$V_{SB}$	Snap-Back Voltage @ $I_{SB}$
$I_{SB}$	Snap-Back Current
$I_{PT}$	Test Current
$V_{PTF}$	Forward Punch-through Breakdown Voltage @ $I_F$
$I_{PTF}$	Forward Test Current

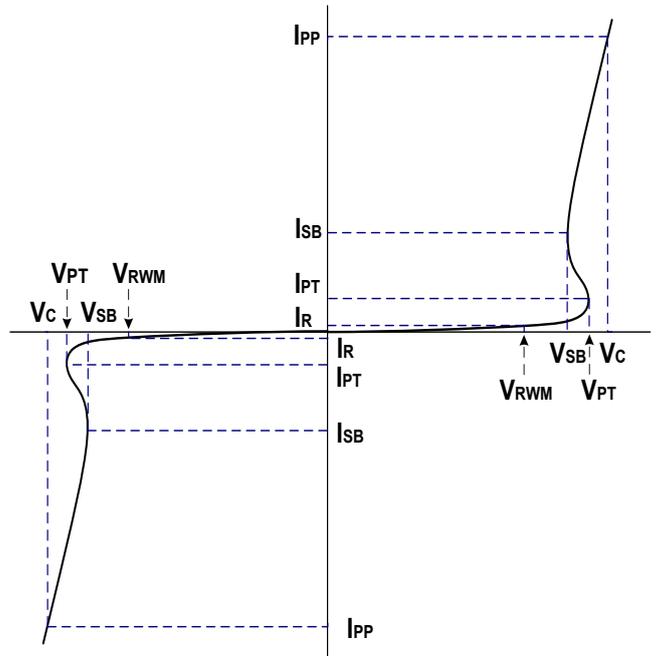

**Electrical Characteristics(T=25°C)**

<b>WS2.8-8LVU</b>						
Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Reverse Stand-Off Voltage	$V_{RWM}$	See Note1			2.8	V
Punch-through Voltage	$V_{PT}$	$I_{PT}=2\mu A$ , See Note1	3.0			V
Reverse Leakage Current	$I_R$	$V_{RWM}=2.8V$ See Note1			1	$\mu A$
Snap-Back Voltage	$V_{SB}$	$I_{SB}=50mA$ , See Note1	2.8			V

## Electrical Characteristics (Cont.)


Parameter	Symbol	Conditions	Minimum	Typical	Maximum	Units
Clamping Voltage ( Note1)	$V_C$	$I_{PP}=2A$ , $t_p=8/20\mu s$ See Note1			6.0	V
Clamping Voltage	$V_C$	$I_{PP}=5A$ , $t_p=8/20\mu s$ See Note1			9.5	V
Clamping Voltage	$V_C$	$I_{PP}=24A$ , $t_p=8/20\mu s$ See Note1			17	V
Clamping Voltage	$V_C$	$I_{PP}=30A$ , $t_p=8/20\mu s$ See Note1			20	V
Junction Capacitance	$C_j$	$V_R = 0V$ , $f = 1MHz$ See Note1		6		pF

### NOTES:


1. Device measured between pin 1 and 2, pin 3 and 4, pin 5 and 6, pin 7 and 8.
2. The 8/20 $\mu s$  test pulse wave is shown in figure3, and the clamping voltage vs.  $I_{PP}$  is shown in figure4.
3. The Junction capacitance vs. Reverse Voltage is shown in figure5.
4. Each Steer Diode integrated in the WS2.8-8LVU reversely connected with a TVS Diode in series.

## Typical Characteristics


**Figure 1: Peak Pulse Power vs. Pulse Time**

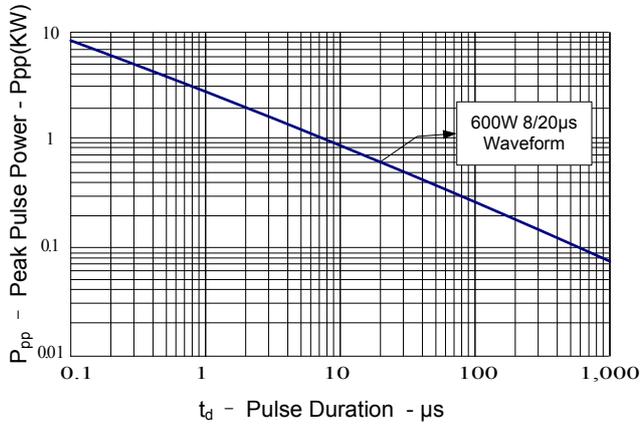


**Figure 2: Power Derating Curve**

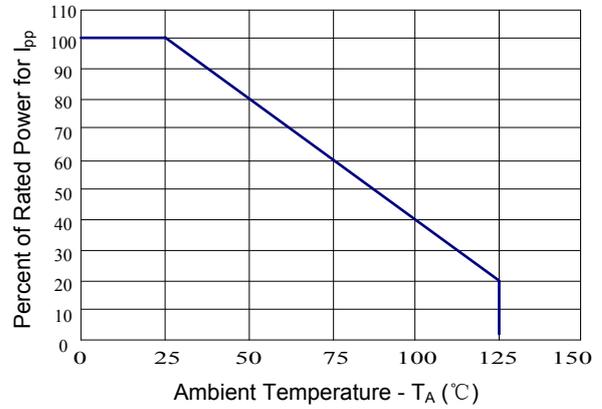


**Figure 3: Pulse Waveform**

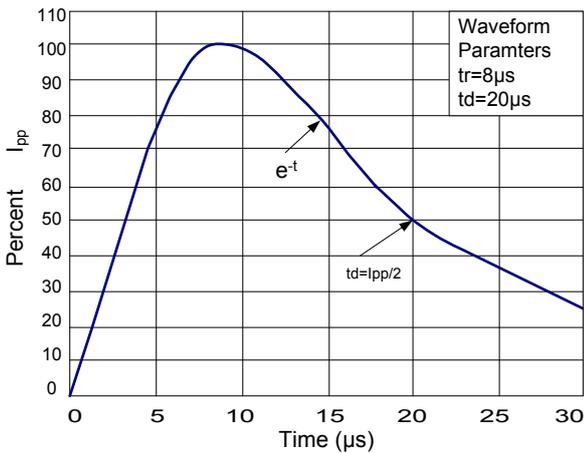

**Figure 4: Clamping Voltage vs. Peak Pulse Current**

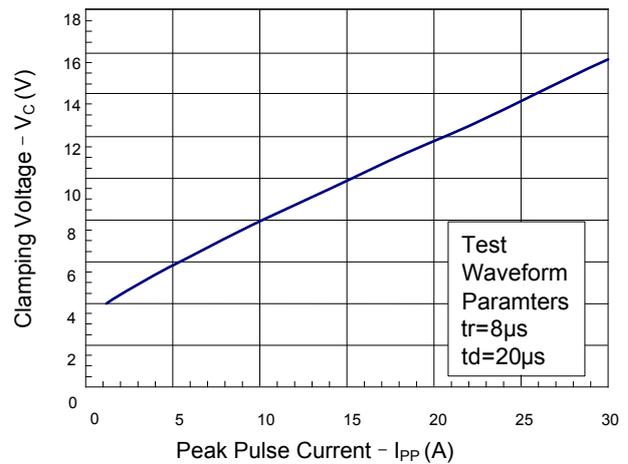

**Figure 5: Capacitance vs. Reverse Voltage**

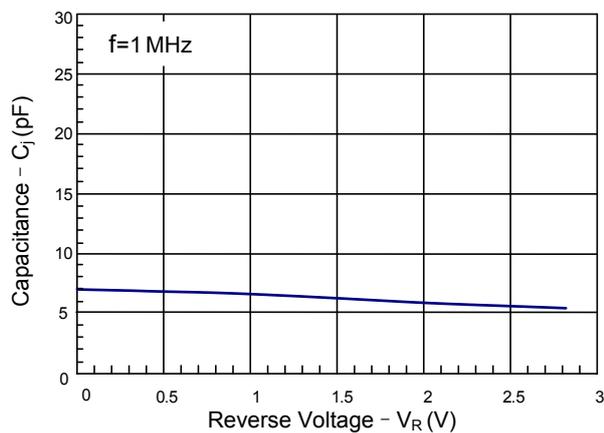


## Application Information

The WS2.8-8LVU is designed to providing protection for electronic equipment that is susceptible to damage caused by Electrostatic Discharge (ESD), Electrical Fast Transients (EFT) and tertiary lightning effects. This product is offered in a unidirectional configuration and provides both common-mode and differential-mode protection.

### Bidirectional Common-mode Protection

The WS2.8-8LVU device provides four lines of bidirectional protection in a common-mode configuration .


- Pin 1 is connected to Line1
- Pin 8 is connected to Line2
- Pin 5 is connected to Line3
- Pin 8 is connected to Line4
- Other Pins are connected to ground

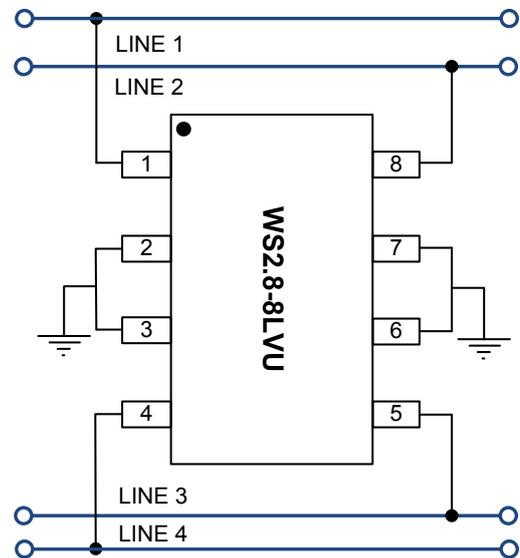


### Bidirectional Differential-mode Protection

The WS2.8-8LVU device provides four line pairs of bidirectional protection in a differential-mode configuration.


- Line1&Line2 compose Line Pair1
- Line3&Line4 compose Line Pair2
- Line1&Line2 compose Line Pair1
- Line3&Line4 compose Line Pair4
- Pin 1&Pin2 is respectively connected to Line1&Line2
- Pin 3&Pin4 is respectively connected to Line3&Line4
- Pin 5&Pin6 is respectively connected to Line5&Line6
- Pin 7&Pin8 is respectively connected to Line7&Line8

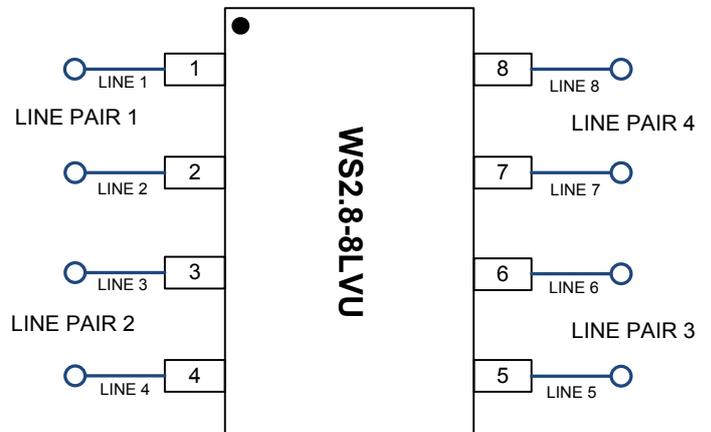

## Main Application

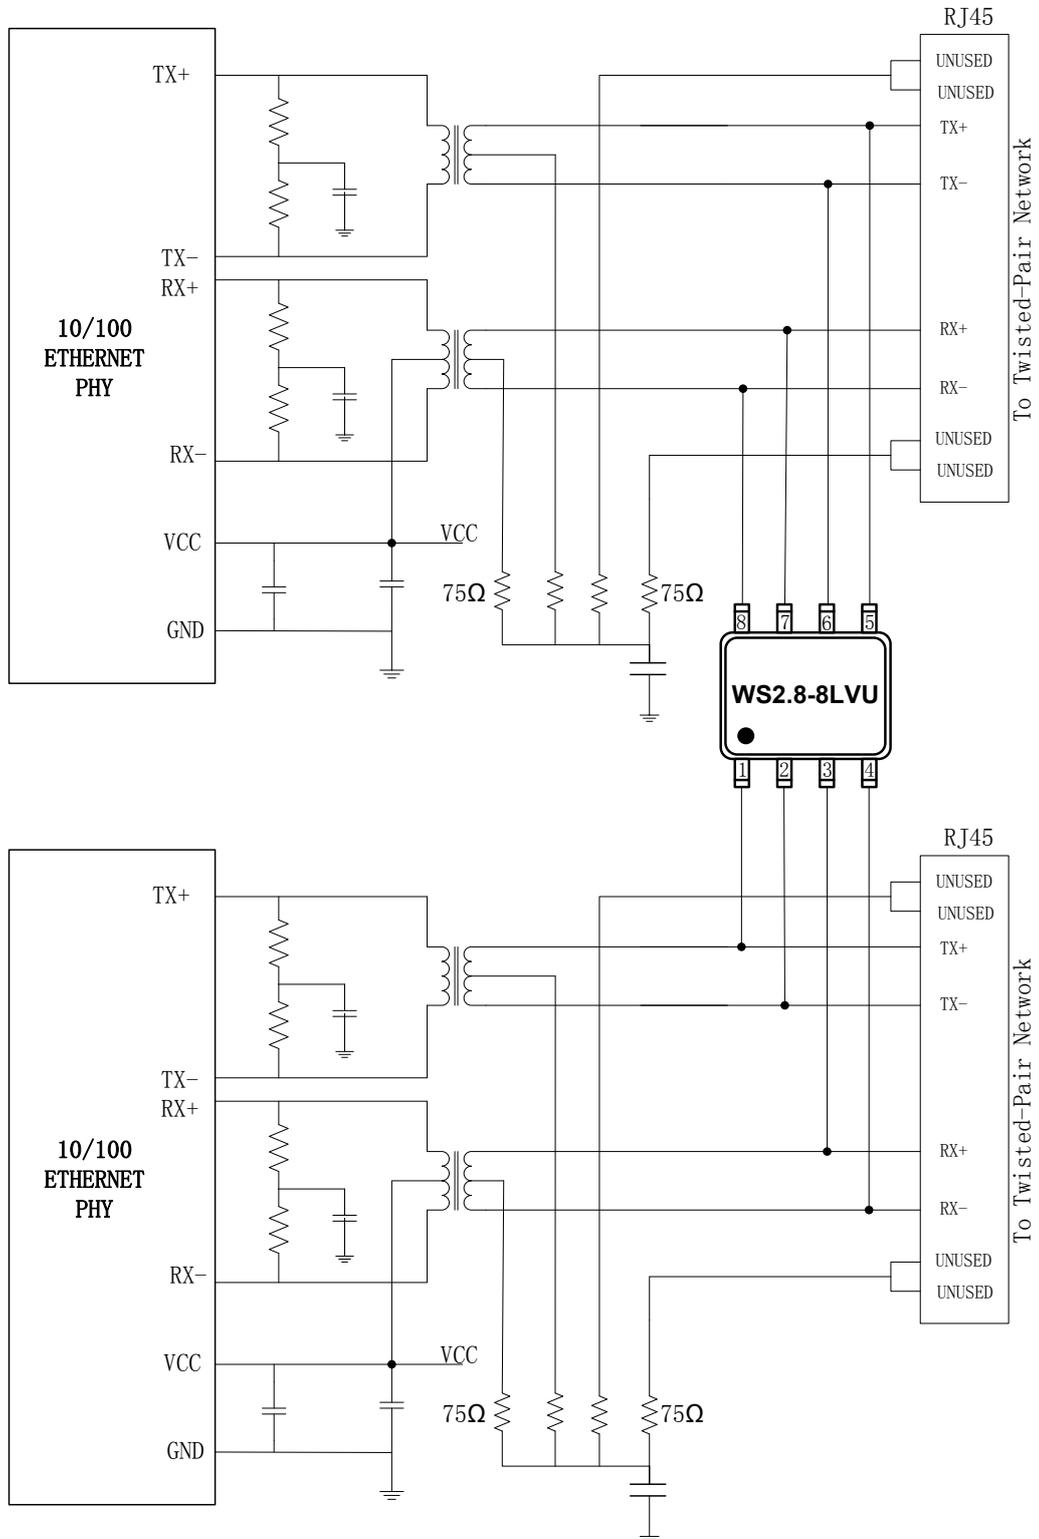

**One WS2.8-8LVU Protecting Two 10/100 Ethernet Port**

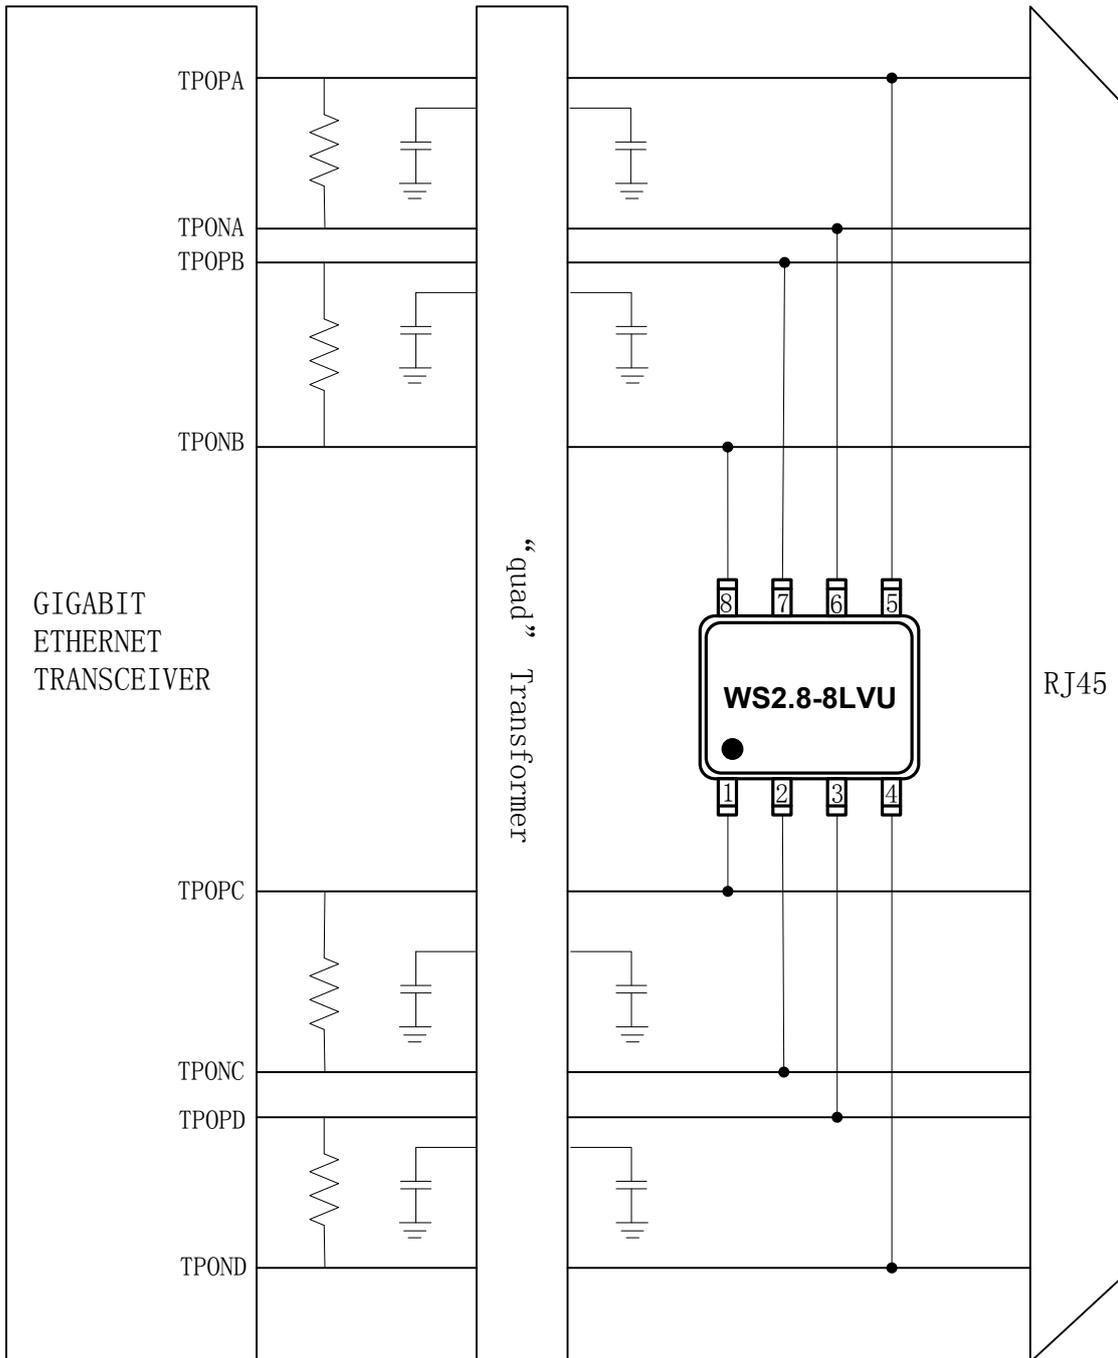

**Gigabit Ethernet Protection Circuit**

### Outline Drawing – SO-8

**PACKAGE OUTLINE**

**SO-8**

**DIMENSIONS**

SYMBOL	INCHES		MILLIMETER	
	MIN	MAX	MIN	MAX
A	0.054	0.068	1.35	1.75
a1	0.004	0.008	0.10	0.25
a2	0.050	0.060	1.25	1.50
D	0.189	0.196	4.80	5.00
F	0.150	0.157	3.80	4.00
E	0.229	0.244	5.80	6.20
e	0.05BSC		1.27BSC	
L	0.016	0.049	0.40	1.250
θ	0°	10°	0°	10°

DIMENSIONS		
DIM	INCHES	MILLIMETERS
C	0.205	5.20
G	0.160	4.06
P	0.050	1.27
X	0.015	0.38
Y	0.045	1.14
Z	0.291	7.40

**Notes**

- This land pattern is for reference purposes only consult your manufacturing group to ensure your company's manufacturing guidelines are met.
- Reference ipc-sm-782a..

### Marking Codes

Part Number	WS2.8-8LVU
Marking Code	WS2.8-8LVU