

DF005S thru DF10S



1.0 A Single-Phase Glass Passivated Bridge Rectifiers

Rectifier Reverse Voltage 50 to 1000V



Features

- This series is UL listed under the Recognized Component Index, file number E142814
- Single In-Line terminals array suitable for P.C. board mounting
- Surge overload ratings to 300 amperes
- The plastic material used carries Underwriters Laboratory flammability recognition 94V-0
- Integrally molded heat sinks provide low thermal resistance for maximum heat dissipation
- High temperature soldering guaranteed 265°C/10 seconds at 5 lbs (2.3kg) tension


Mechanical Data

Case: Molded plastic with heat sink integrally mounted in the bridge encapsulation

Terminals: Plated wire leads solderable per MIL-STD-202, Method 208

Mounting Position: Any

Weight: 0.04 ounce, 1.0 grams (approx)

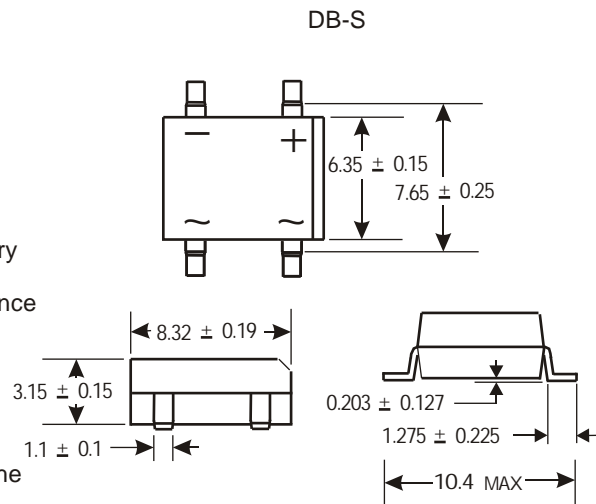

Dimensions in millimeters(1mm =0.0394")

Maximum Ratings & Thermal Characteristics

Rating at 25°C ambient temperature unless otherwise specified, Resistive or Inductive load, 60 Hz.
For Capacitive load derate current by 20%.

| Parameter | Symbol | DF005S | DF01S | DF02S | DF04S | DF06S | DF08S | DF10S | unit |
|---|------------------|--------------|-------|-------|-------|-------|-------|-------|--------------------|
| Maximum repetitive peak reverse voltage | VRRM | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS bridge input voltage | VRMS | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC blocking voltage | VDC | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum average forward rectified output current at TA=40°C | IF(AV) | 1.0 | | | | | | | A |
| Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method) | IFSM | 50.0 | | | | | | | A |
| Rating for fusing (t<8.3ms) | I ² t | 10 | | | | | | | A ² sec |
| Typical thermal resistance per element (1) | ReJA | 110 | | | | | | | °C/W |
| Typical junction capacitance per element (2) | Cj | 25.0 | | | | | | | pF |
| Operating junction and storage temperature range | TJ, TSTG | -55 to + 150 | | | | | | | °C |

Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified. Resistive or Inductive load, 60Hz.
For Capacitive load derate by 20 %.

| Parameter | Symbol | DF005S | DF01S | DF02S | DF04S | DF06S | DF08S | DF10S | Unit |
|---|--------|-----------|-------|-------|-------|-------|-------|-------|------|
| Maximum instantaneous forward voltage drop per leg at 1.0A | VF | 1.1 | | | | | | | V |
| Maximum DC reverse current at rated TA =25°C DC blocking voltage per element TA =125°C | IR | 10 500 | | | | | | | μA |

Notes: (1)Thermal resistance from Junction to Ambient on P.C.board mounting.
(2)Measured at 2.0MHz and applied reverse voltage of 4.0 volts.



Rating and Characteristic Curves ($T_A=25^{\circ}\text{C}$ Unless otherwise noted) DF005S thru DF10S

Fig. 1 Derating Curve for Output Rectified Current

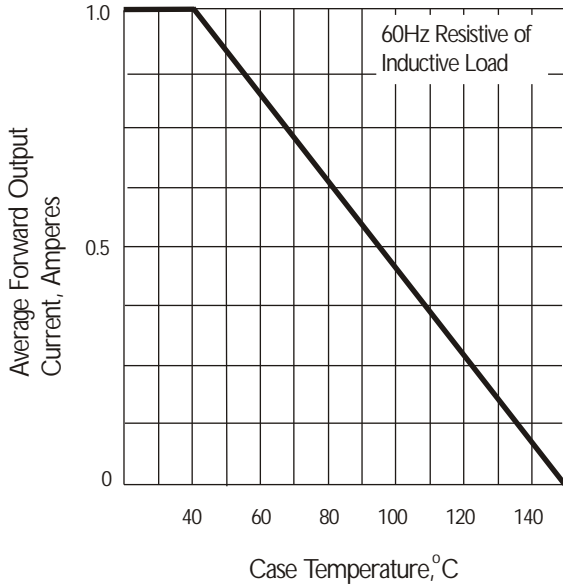


Fig. 2 Maximum Non-repetitive Peak Forward Surge Current

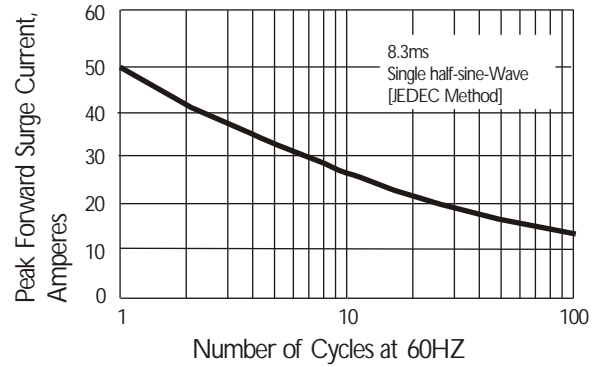


Fig. 3 Typical Instantaneous Forward Characteristics

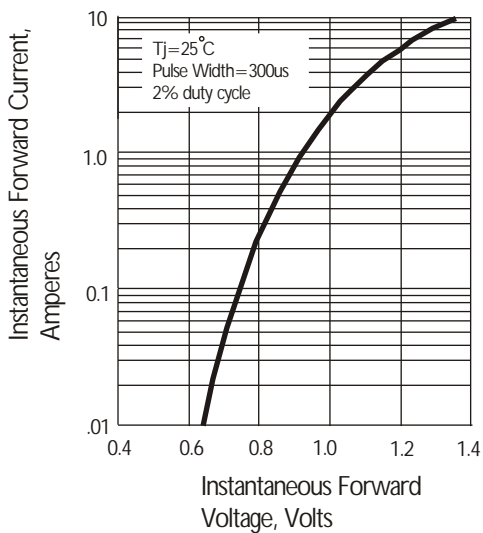


Fig. 4 Typical Revers Characteristics

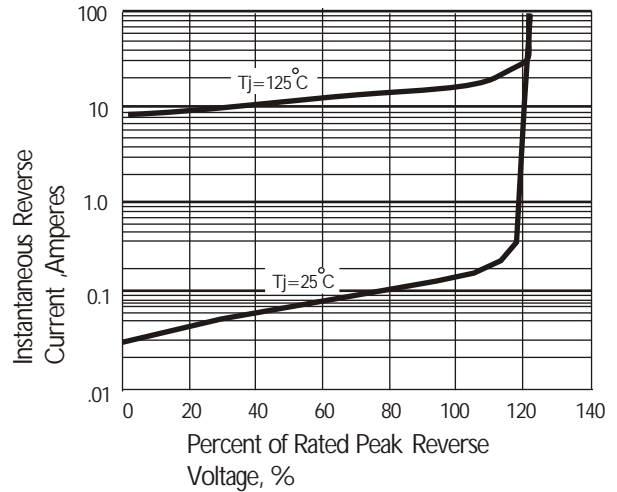


Fig. 5 Typical Junction Capacitance

