



Φ3.6x10mm IEC STANDARD FUSE
RoHS Compliant & Pb-Free
GLASS TUBE MICROFUSE (TIME-LAG)
玻璃保险丝管 (慢断型)

INTERRUPTING CAPACITY / 分断能力:

CQC / VDE / UR / cUR:


35A OR 10In 250V AC WHICHEVER IS GREATER

TECHNICAL PARAMETERS/ 技术参数:

| CATALOG NO. 目录编号 | CURRENT RATING 额定电流 | Max. VOLTAGE DROP (mv) 最大电压降 | SAFETY APPROVALS 安全认证 | | | REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值 |
|---------------------|------------------------|---------------------------------|--------------------------|-----|-------|---|
| | | | CQC | VDE | cURus | |
| 30T 0200H | 200mA | 260 | ● | ● | ● | 0.1981 |
| 30T 0250H | 250mA | 240 | ● | ● | ● | 0.3120 |
| 30T 0315H | 315mA | 220 | ● | ● | ● | 0.5219 |
| 30T 0400H | 400mA | 200 | ● | ● | ● | 0.8606 |
| 30T 0500H | 500mA | 190 | ● | ● | ● | 1.323 |
| 30T 0630H | 630mA | 180 | ● | ● | ● | 2.473 |
| 30T 0800H | 800mA | 160 | ● | ● | ● | 4.165 |
| 30T 010H | 1A | 140 | ● | ● | ● | 2.811 |
| 30T 013H | 1.25A | 130 | ● | ● | ● | 5.300 |
| 30T 016H | 1.6A | 120 | ● | ● | ● | 6.315 |
| 30T 020H | 2A | 100 | ● | ● | ● | 9.668 |
| 30T 025H | 2.5A | 100 | ● | ● | ● | 16.72 |
| 30T 032H | 3.15A | 100 | ● | ● | ● | 28.92 |
| 30T 040H | 4A | 100 | ● | ● | ● | 60.86 |
| 30T 050H | 5A | 100 | ● | ● | ● | 84.99 |
| 30T 063H | 6.3A | 100 | ● | ● | ● | 213.8 |

● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V H 代表 250V

Dimensions/ 尺寸:

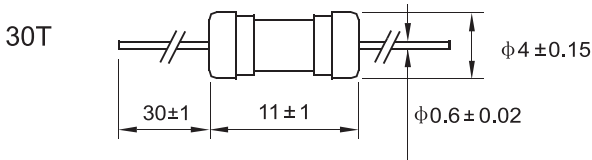

Standards/ 标准: IEC 60127 GB 9364

Operating Temperature/ 工作温度: -55°C ~125°C

Storing Temperature/ 储存温度: -55°C ~85°C

Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.

Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

ELECTRICAL CHARACTERISTICS/ 电气特性:

| RATING 额定 | | BLOWING TIME 熔断时间 |
|-----------|---------|-------------------|
| 2.1In | Max. 最慢 | 2 minutes |
| | Min. 最快 | 400 ms |
| 2.75In | Max. 最慢 | 10 seconds |
| | Min. 最快 | 150 ms |
| 4In | Max. 最慢 | 3 seconds |
| | Min. 最快 | 20 ms |
| 10In | Max. 最慢 | 150 ms |

30T AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

30T 平均 I-T 曲线图 (仅供参考)

