

Ⓜ **35NM, 36NM**

Φ3.6x10mm, RoHS Compliant & Pb-Free
CERAMIC TUBE MICROFUSE (FAST-BLOW)
瓷保险丝管 (速断型)

INTERRUPTING CAPACITY / 分断能力:

50 amperes at 125V AC (100mA-15A)
50 amperes at 250V AC (100mA-15A)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A ² .Sec.) (RoHS) I ² T 参考值
		UL		cUL		CSA		
		H	L	H	L	H	L	
35NM,36NM-0100H/L	100mA	●	●	●	●	●	●	0.001375
35NM,36NM-0125H/L	125mA	●	●	●	●	●	●	0.001763
35NM,36NM-0150H/L	150mA	●	●	●	●	●	●	0.004396
35NM,36NM-0160H/L	160mA	●	●	●	●	●	●	0.004689
35NM,36NM-0200H/L	200mA	●	●	●	●	●	●	0.005861
35NM,36NM-0250H/L	250mA	●	●	●	●	●	●	0.01093
35NM,36NM-0300H/L	300mA	●	●	●	●	●	●	0.07196
35NM,36NM-0315H/L	315mA	●	●	●	●	●	●	0.08236
35NM,36NM-0350H/L	350mA	●	●	●	●	●	●	0.09546
35NM,36NM-0375H/L	375mA	●	●	●	●	●	●	0.1172
35NM,36NM-0400H/L	400mA	●	●	●	●	●	●	0.1389
35NM,36NM-0500H/L	500mA	●	●	●	●	●	●	0.09975
35NM,36NM-0600H/L	600mA	●	●	●	●	●	●	0.1354
35NM,36NM-0630H/L	630mA	●	●	●	●	●	●	0.1422
35NM,36NM-0750H/L	750mA	●	●	●	●	●	●	0.1956
35NM,36NM-0800H/L	800mA	●	●	●	●	●	●	0.2463
35NM,36NM-010H/L	1A	●	●	●	●	●	●	0.3606
35NM,36NM-012H/L	1.2A	●	●	●	●	●	●	0.5181
35NM,36NM-013H/L	1.25A	●	●	●	●	●	●	0.5728
35NM,36NM-015H/L	1.5A	●	●	●	●	●	●	0.8601
35NM,36NM-016H/L	1.6A	●	●	●	●	●	●	1.115
35NM,36NM-020H/L	2A	●	●	●	●	●	●	2.189
35NM,36NM-023H/L	2.25A	●	●	●	●	●	●	2.463
35NM,36NM-025H/L	2.5A	●	●	●	●	●	●	1.911
35NM,36NM-030H/L	3A	●	●	●	●	●	●	3.420
35NM,36NM-032H/L	3.15A	●	●	●	●	●	●	3.833
35NM,36NM-035H/L	3.5A	●	●	●	●	●	●	5.155
35NM,36NM-040H/L	4A	●	●	●	●	●	●	5.891
35NM,36NM-050H/L	5A	●	●	●	●	●	●	9.401
35NM,36NM-060H/L	6A	●	●	●	●	●	●	16.34
35NM,36NM-063H/L	6.3A	●	●	●	●	●	●	20.59
35NM,36NM-070H/L	7A	●	●	●	●	●	●	26.03
35NM,36NM-080H/L	8A	●	●	●	●	●	●	30.86
35NM,36NM-090H/L	9A	●	●	●	●	●	●	46.89
35NM,36NM-100H/L	10A	●	●	●	●	●	●	59.32
35NM,36NM-120H/L	12A	●	●	●	●	●	●	92.27
35NM,36NM-150H/L	15A	●	●	●	●	●	●	243.7


● DENOTES FOR APPROVED ● 表示已取得安全认证
H DENOTES FOR 250V (H 代表 250V), L DENOTES FOR 125V (L 代表 125V)
cUL APPROVAL IS EQUIVALENT TO CSA APPROVAL
cUL 认证同等 CSA 认证使用

Standards/ 标准: UL 248-1, UL 248-14
Operating Temperature/ 工作温度: -55°C ~125°C
Storing Temperature/ 储存温度: -55°C ~85°C
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.
Solderability/ 可焊性: 245°C ± 5°C, 5s ± 0.5s

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	60 seconds Max.	最慢 60 秒

Dimensions/ 尺寸:

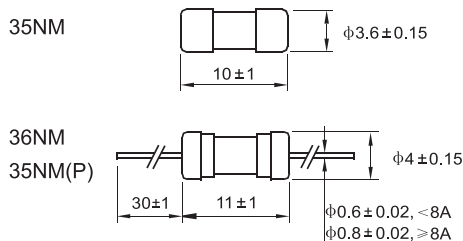

**35NM/36NM AVERAGE I-T CHARACTERISTICS CURVE
(FOR REFERENCE ONLY)**
35NM/36NM 平均 I-T 曲线图 (仅供参考)

