



Ⓜ 35S, 36S U<sub>L</sub> cUL SP

Φ3.6x10mm, RoHS Compliant & Pb-Free  
CERAMIC TUBE MICROFUSE (SLOW-BLOW)  
瓷保险丝管 (慢断型)

INTERRUPTING CAPACITY / 分断能力:

50 amperes at 125V AC (100mA-15A)  
50 amperes at 250V AC (100mA-15A)

TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证						REFERENCE (A <sup>2</sup> ·Sec.) (RoHS) I <sup>2</sup> T 参考值
		UL(cUL)		CSA				
		H	L	H		L		
				35S	36S	35S	36S	
35S,36S-0100H/L	100mA	●	●	●	●	●	●	0.02127
35S,36S-0125H/L	125mA	●	●	●	●	●	●	0.02058
35S,36S-0150H/L	150mA	●	●	●	●	●	●	0.04566
35S,36S-0160H/L	160mA	●	●	●	●	●	●	0.04362
35S,36S-0200H/L	200mA	●	●	●	●	●	●	0.07841
35S,36S-0250H/L	250mA	●	●	●	●	●	●	0.1531
35S,36S-0300H/L	300mA	●	●	●	●	●	●	0.2431
35S,36S-0315H/L	315mA	●	●	●	●	●	●	0.2107
35S,36S-0350H/L	350mA	●	●	●	●	●	●	0.5416
35S,36S-0375H/L	375mA	●	●	●	●	●	●	0.5196
35S,36S-0400H/L	400mA	●	●	●	●	●	●	0.4975
35S,36S-0500H/L	500mA	●	●	●	●	●	●	0.7752
35S,36S-0600H/L	600mA	●	●	●	●	●	●	0.9302
35S,36S-0630H/L	630mA	●	●	●	●	●	●	1.623
35S,36S-0750H/L	750mA	●	●	●	●	●	●	1.508
35S,36S-0800H/L	800mA	●	●	●	●	●	●	0.4494
35S,36S-010H/L	1A					●	●	0.8224
35S,36S-012H/L	1.2A					●	●	1.548
35S,36S-013H/L	1.25A					●	●	1.612
35S,36S-015H/L	1.5A					●	●	2.534
35S,36S-016H/L	1.6A					●	●	2.940
35S,36S-020H/L	2A					●	●	5.579
35S,36S-023H/L	2.25A					●	●	6.276
35S,36S-025H/L	2.5A	●	●				●	3.375
35S,36S-030H/L	3A	●	●				●	5.342
35S,36S-032H/L	3.15A	●	●				●	5.854
35S,36S-035H/L	3.5A	●	●				●	7.045
35S,36S-040H/L	4A	●	●				●	11.05
35S,36S-050H/L	5A	●	●				●	18.64
35S,36S-060H/L	6A	●	●				●	29.38
35S,36S-063H/L	6.3A	●	●				●	32.13
35S,36S-070H/L	7A	●	●				●	44.28
35S,36S-080H/L	8A	●	●				●	56.69
35S,36S-090H/L	9A	●	●				●	82.90
35S,36S-100H/L	10A	●	●				●	109.1
35S,36S-120H/L	12A						●	150.7
35S,36S-150H/L	15A						●	337.4

● DENOTES FOR APPROVED ● 表示已取得安全认证  
H DENOTES FOR 250V H 代表 250V  
L DENOTES FOR 125V L 代表 125V


Standards/ 标准: UL 248-1, UL 248-14  
Operating Temperature/ 工作温度: -55°C ~125°C  
Storing Temperature/ 储存温度: -55°C ~85°C  
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.  
Solderability/ 可焊性: 245°C ±5°C, 5s ±0.5s

ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
100%	4 hours Min.	最快 4 小时
200%	1-60 seconds	1-60 秒

Dimensions/ 尺寸:

Unit 单位: mm

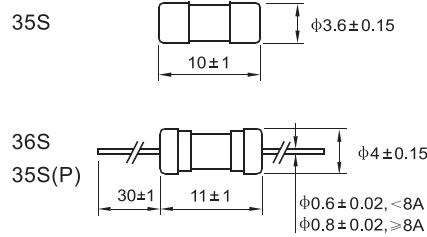

35S/36S AVERAGE I-T CHARACTERISTICS CURVE  
(FOR REFERENCE ONLY)

35S/36S 平均 I-T 曲线图 (仅供参考)

