



Your Power Safeguard™  
您的电路安全卫士



# Ⓜ 61NR, 62NR

Φ 6.35x32mm, RoHS Compliant & Pb-Free  
GLASS TUBE FUSE (FAST-BLOW)  
玻璃保险丝管 (速断型)




**INTERRUPTING CAPACITY / 分断能力:**  
100 amperes at 125V AC (1A-15A) PSE (61NR)  
500 amperes at 125V AC (1A-15A) PSE (62NR)  
100 amperes at 250V AC (1A-15A) PSE (61NR/62NR)  
100 amperes at 250V AC (100mA-15A) KC

## TECHNICAL PARAMETERS/ 技术参数:

CATALOG NO. 目录编号	CURRENT RATING 额定电流	SAFETY APPROVALS 安全认证			REFERENCE (A <sup>2</sup> .Sec.) (RoHS) IT 参考值	
		PSE		KC		
		H	L			
61NR,62NR-0100H/L	100mA				●	
61NR,62NR-0125H/L	125mA				●	
61NR,62NR-0150H/L	150mA				●	
61NR,62NR-0160H/L	160mA				●	
61NR,62NR-0200H/L	200mA				●	
61NR,62NR-0250H/L	250mA				●	0.01399
61NR,62NR-0300H/L	300mA				●	0.02373
61NR,62NR-0315H/L	315mA				●	0.03011
61NR,62NR-0350H/L	350mA				●	0.04456
61NR,62NR-0375H/L	375mA				●	0.05631
61NR,62NR-0400H/L	400mA				●	0.06898
61NR,62NR-0500H/L	500mA				●	0.1470
61NR,62NR-0600H/L	600mA				●	0.2725
61NR,62NR-0630H/L	630mA				●	0.3113
61NR,62NR-0750H/L	750mA				●	0.4806
61NR,62NR-0800H/L	800mA				●	0.5983
61NR,62NR-010H/L	1A	●	●	●	●	0.7281
61NR,62NR-012H/L	1.2A	●	●	●	●	1.4956
61NR,62NR-013H/L	1.25A	●	●	●	●	1.818
61NR,62NR-015H/L	1.5A	●	●	●	●	1.975
61NR,62NR-016H/L	1.6A	●	●	●	●	2.365
61NR,62NR-020H/L	2A	●	●	●	●	2.932
61NR,62NR-023H/L	2.25A	●	●	●	●	6.929
61NR,62NR-025H/L	2.5A	●	●	●	●	13.03
61NR,62NR-030H/L	3A	●	●	●	●	22.27
61NR,62NR-032H/L	3.15A	●	●	●	●	25.26
61NR,62NR-035H/L	3.5A	●	●	●	●	34.14
61NR,62NR-040H/L	4A	●	●	●	●	45.96
61NR,62NR-050H/L	5A	●	●	●	●	80.38
61NR,62NR-060H/L	6A	●	●	●	●	124.8
61NR,62NR-063H/L	6.3A	●	●	●	●	136.2
61NR,62NR-070H/L	7A	●	●	●	●	164.1
61NR,62NR-080H/L	8A	●	●	●	●	280.4
61NR,62NR-090H/L	9A	●	●	●	●	319.5
61NR,62NR-100H/L	10A	●	●	●	●	406.7
61NR,62NR-120H/L	12A	●	●	●	●	675.4
61NR,62NR-150H/L	15A	●	●	●	●	1083

● DENOTES FOR APPROVED ● 表示已取得安全认证  
H DENOTES FOR 250V (H 代表 250V), L DENOTES FOR 125V (L 代表 125V)

## Dimensions/ 尺寸:

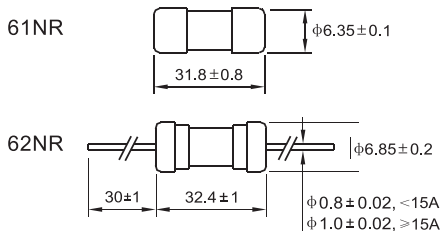

## ELECTRICAL CHARACTERISTICS/ 电气特性:

% of CURRENT RATING 额定电流的 %	BLOWING TIME 熔断时间	
130%	1 hour Min.	最快 1 小时
160%	1 hour Max.	最慢 1 小时
200%	120 seconds Max.	最慢 120 秒

Standards/ 标准: JIS C6575  
Operating Temperature/ 工作温度: -55°C ~125°C  
Storing Temperature/ 储存温度: -55°C ~85°C  
Resistance to soldering heat/ 耐焊接热性: 260°C, 10s Max.  
Solderability/ 可焊性: 245°C ± 5°C, 5s ± 0.5s

## 61NR/62NR AVERAGE I-T CHARACTERISTICS CURVE (FOR REFERENCE ONLY)

61NR/62NR 平均 I-T 曲线图 (仅供参考)

