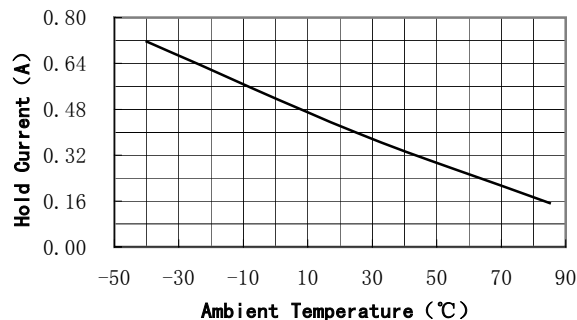



Electrical Characteristics:

Max. Interrupt Current	5.5 A _{RMS}	Max. Interrupt Voltage	265 V _{RMS}
Max. Operating Current I	5.5 A _{DC}	Max. Operating Voltage	240 V _{DC}
Max. Operating Current II	20.0 A _{DC}	Max. Operating Voltage	135 V _{DC}
Hold Current at 25°C	0.40 A	Trip Current at 25°C	0.9 A
Initial Resistance	0.60~0.97 Ω	Max. Post Trip Resistance	1.9 Ω

Thermal Derating Curves:**Physical Description for Dimensions :**

A: 11.5mm/0.453in. (Max.)

B: 20.9mm/0.823in. (Max.)

C: 4.2mm/0.165in. (Max.)


D: 5.1mm/0.201in. (Typ.)

Terminal Material: Tin plated copper, Φ0.60mm/0.024in.**Insulating Material:** Cured, flame-retardant epoxy polymer; meets UL 94V-0 requirements**Test Conditions and Accept/Reject Criteria:**

Test	Test Conditions	Accept/Reject Criteria
Initial Resistance	In still air at 25°C	0.60~0.97 Ohms
Hold Current	0.4A, 60min, at 25°C	No trip
Time to Trip	2.0A, 265V at 25°C	≤24.0 Seconds
Trip Cycle Life	5.5A, 240V, 20Cycles	No arcing or burning
Trip Endurance	5.5A, 265V, 24hr	No arcing or burning

Storage Temperature: -40°C to 85°C**Part Numbering System:**

KT 265- 400 BL

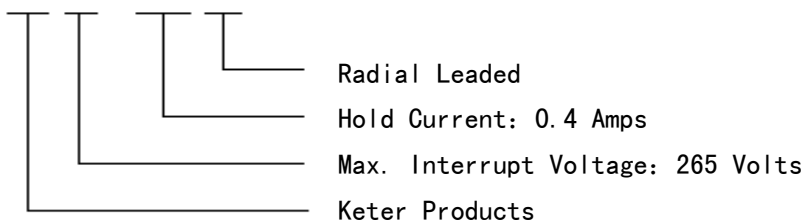

Agency Recognition: UL、TUV

