


SPECIFICATION FOR APPROVAL

REF : 20070329-A


PAGE: 1

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU4011□□□□L□-□□□
		ABC'S ITEM NO.	

CONFIGURATION & DIMENSIONS :

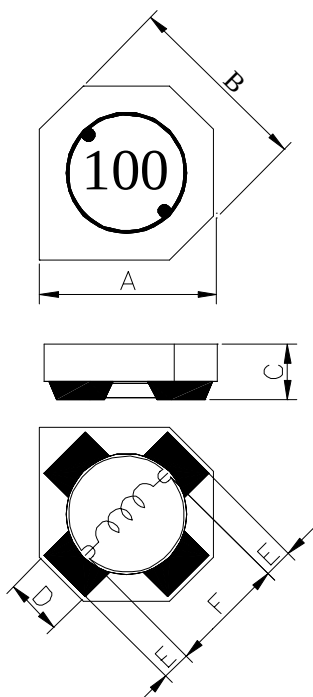


A : 4.30±0.20	m/m
B : 4.50±0.20	m/m
C : 1.10±0.15	m/m
D : 1.50 typ	m/m
E : 0.50 typ	m/m
F : 3.30 typ	m/m
G : 1.70 ref	m/m
H : 5.30 ref	m/m
I : 1.00 ref	m/m
J : 3.30 ref	m/m




(PCB Pattern suggestion)

SCHEMATIC DIAGRAM :



MATERIALS :


- a . Core : Ferrite DR core
- b . Core : Ferrite RI core
- c . Wire : Enamelled copper wire (class H)
- d . Adhesive : Epoxy resin
- e . Terminal : Ag/Ni/Sn
- f . Remark : Products comply with RoHS' requirements

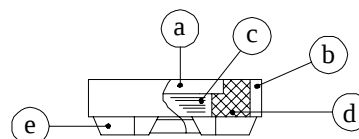

GENERAL SPECIFICATION :

- a . Temp. rise : 30 typ.
- b . Rated current :
Base on temp. rise & L / L0A=35% typ.
- c . Storage temp. : -40 ----+125
- d . Operating temp. : -40 ----+105
- e . Resistance to solder heat : 260 .10 secs.

Peak Temp : 260 max.
Max time above 230 : 50sec max.
Max time above 200 : 70sec max.

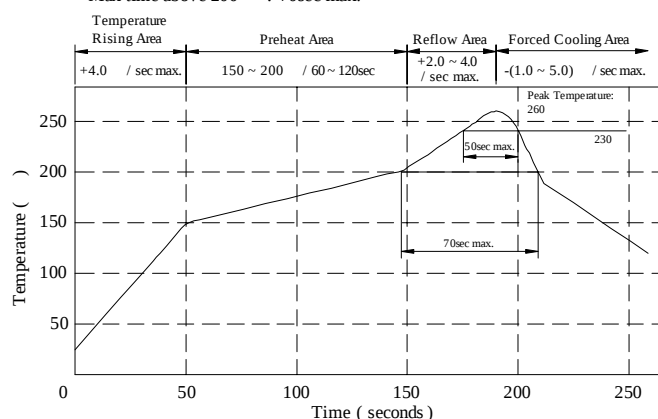

AR-001A

SPECIFICATION FOR APPROVAL

REF : 20070329-A

PAGE: 2


PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU4011□□□□L□-□□□
		ABC'S ITEM NO.	

ELECTRICAL CHARACTERISTICS :

DWG No.	Inductance (μ H)	Q ref.	Test Freq. (Hz)		RDC (m Ω)		SRF (MHz) typ.	Irms (mA) typ.	Isat (mA) typ.
			L	Q	typ.	max.			
SU40113R0YL□-□□□	3.0 $\pm$ 30 %	8.0	100K	7.96M	70	92	95	1700	1150
SU40114R7YL□-□□□	4.7 $\pm$ 30 %	8.0	100K	7.96M	100	130	70	1250	940
SU40116R8YL□-□□□	6.8 $\pm$ 30 %	8.0	100K	7.96M	150	230	54	1050	760
SU4011100YL□-□□□	10.0 $\pm$ 30 %	16.0	100K	2.52M	230	300	40	820	610
SU4011150YL□-□□□	15.0 $\pm$ 30 %	12.0	100K	2.52M	350	460	34	650	480
SU4011220YL□-□□□	22.0 $\pm$ 30 %	12.0	100K	2.52M	420	680	22	580	420

- 1) . □ : Packaging Information... [A] : Bulk [B] : Taping Reel
- 2) . "- □□□ " : Reference code
- 3) . Inductance Test Freq. : 100KHz / 0.1V
- 4) . Isat base on L / L0A=35% typ.
- 5) . Irms base on Temp. rise 30 typ.

@ Inductance VS. DC Current Curve

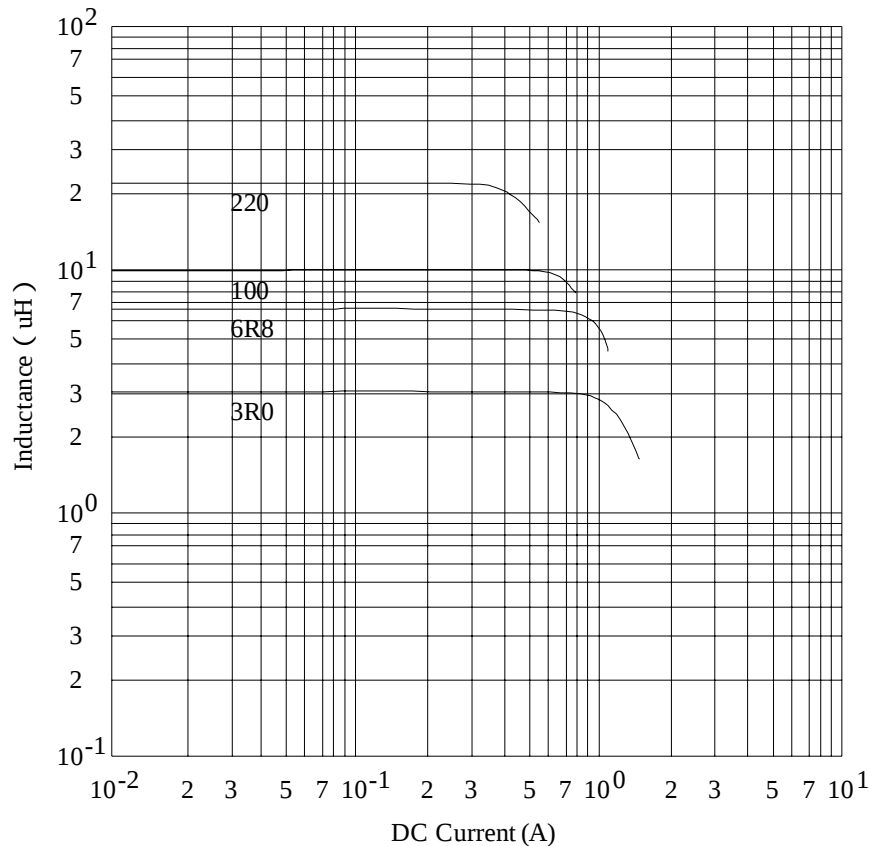

AR-001A

SPECIFICATION FOR APPROVAL



REF : 20070329-A

PAGE: 3

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU4011□□□□L□-□□□
		ABC'S ITEM NO.	

PACKAGING INFORMATION :

(1) Configuration

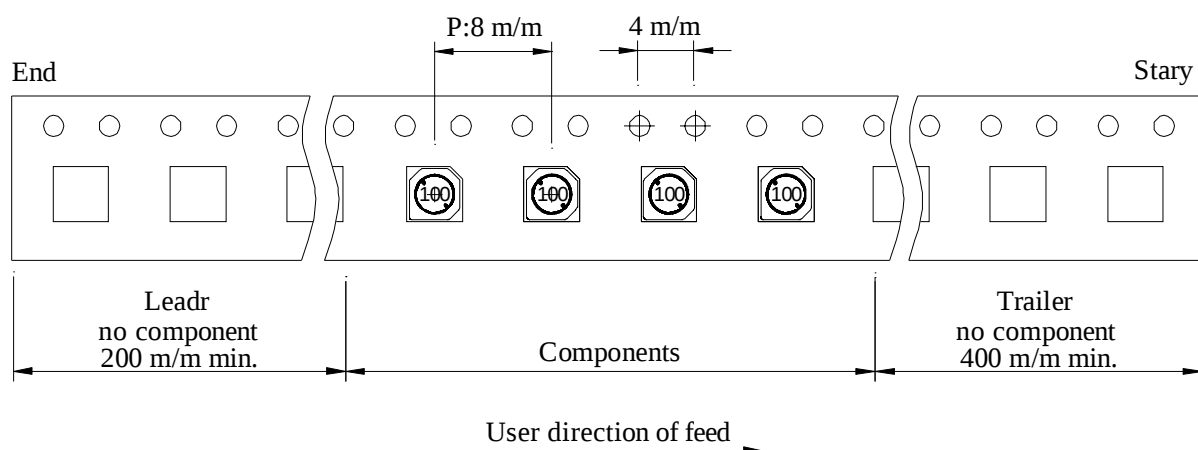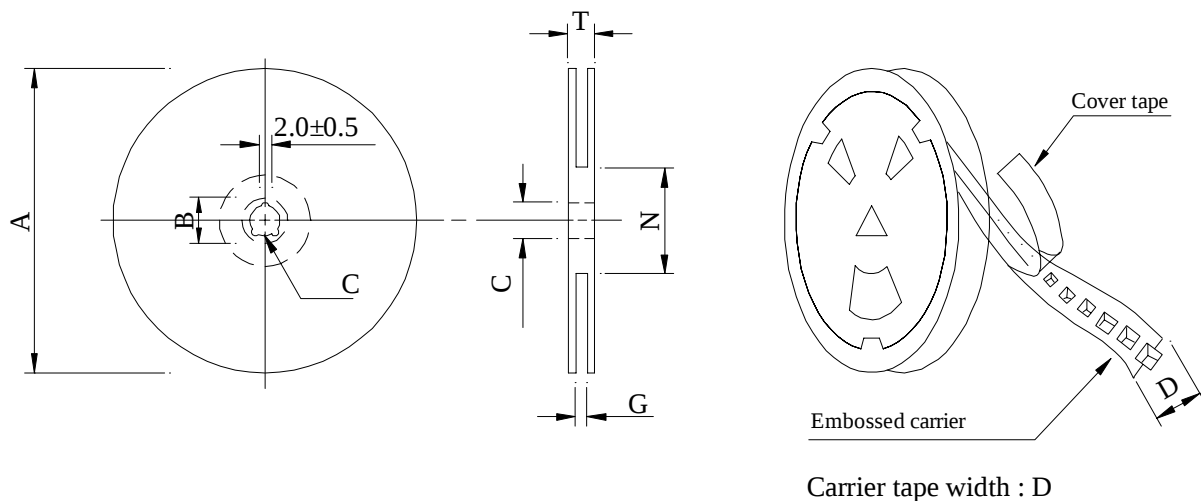

(2) Dimensions

Unit:m/m

Style	A	B	C	D	G	N	T
07 - 12	178	21±0.8	13	12	14 ⁺⁰	50 ⁻⁰	16.5

(3) Q'TY & G.W. Per package

Series	Inner : Reel			Outer : Carton		
	Q'TY (pcs)	G.W. (gw)	Style	Q'TY (pcs)	G.W. (Kg)	Size (cm)
SU4011	1,500	180	07 - 12	60,000	8.00	42 x 41 x 24

SPECIFICATION FOR APPROVAL

REF : 20070329-A

PAGE: 4

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU4011□□□□L□-□□□
		ABC'S ITEM NO.	

. DWGING NUMBER EXPRESSION :

S U 4 0 1 1 □ □ □ □ □ □ — □ □ □

Reference code

Appendix code 2 : Package

Appendix code 1 : Classification

Tolerance code

Electrical code

Dimension code

Type code

Appendix code 1 : Product Classification

L : Lead Free Standard products comply with RoHS' requirements

1 ~ 9 : Lead Free Special products comply with RoHS' requirements

Appendix code 2 : Package Information

Code	Inner package	Inner package Q'TY	Remark
A	T.B.D.	T.B.D.	
B	T / R (Reel package)	1,500 pcs	

SPECIFICATION FOR APPROVAL

REF : 20070329-A

PAGE: 5

PROD.	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU4011□□□□L□-□□□
NAME		ABC'S ITEM NO.	

RELIABILITY TEST :

Test item	Specification	Test condition
Solderability	More than 90% of the terminal electrode shall be covered With fresh solder.	Preheat : 150±25 for 60 seconds Solder : Sn96.5 / Ag3 / Cu0.5 or equivalent Solder temp. : 235±5 Flux : Rosin Dip time : 4±1 seconds
Thermal shock test (Temp. cycle)	Inductance shall not change more than ±30%	Room temp. → -25±2 15 minutes 30 minutes Room temp. → 85±2 15 minutes 30 minutes Total : 50 cycles
Humidity Resistance test		Temperature : 40±2 Humidity : 90 ~ 95% Applied current : Per spec. Time : 500 hours
High temp. Resistance test		Temperature : 105±2 Applied current : Per spec. Time : 500 hours

AR-001A



千如電子集團
ABC ELECTRONICS GROUP

SPECIFICATION FOR APPROVAL

REF : 20070329-A

PAGE: 6

PROD. NAME	SHIELDED SMD POWER INDUCTOR	ABC'S DWG NO.	SU4011□□□□L□-□□□
		ABC'S ITEM NO.	

. UL CARD :

OBMW2

August 27, 1999

Magnet Wire-Component

ELEKTRISOLA (MALAYSLA) SDN BHD

E143312

IALAN DAMN SATU IANDA BAIK 28750 BENTONG, PAHANG
DARUL MAKMUR MALAYSIA

Mtl Dsg	Mark Dsg	Coating Type		ANSI Typ	Temp Class
		BC	OC		
Estersol 160	E180	Polyesterimide (solderable)	—	MW-77	180
Amldester 200	A200	Polyesterimide	—	MW-74	200
Polysol-N 155	PN155	Polyurethane	Nylon	MW-80, MW-28	155, 100
Polysol 155	P155	Polyurethane	—	MW-79, MW-79	155, 130
Polysol 155g	Pg155	Polyurethane	—	MW-79	130
Polysol 155p	Pp155,Gp155	Polyurethane	—	MW-79	155
Polysol 160	P160	Polyurethane	—	MW-79	155
Polysol 180	P180	Polyurethane	—	MW-79	155
Polysol 170	P170 or G170	Polyurethane	—	MW-79	156
Polysol-N 180	PN180	Polyurethane	Nylon	—	180

Marking : Dompany name/nateriel designation or marked designation and factory identification on package ok reel

See General Information preceding These Recognitions

For use only in equipment where the acceptability of the combination is determined by Underwriters Laboratories Inc.

AR-001A



千如電子集團
ABC ELECTRONICS GROUP.