

Electrical Specifications

Reference standard	VDE	IEC
Rated voltage	250V	300V
Rated current	8A	10A
Wire diameter	24-14AWG	2.5mm ²
Withstanding voltage	AC2500V/Min	


Operating temperature	-40°C~+105°C	
Stripping length	6-7mm	
Torque	4.0kgf.cm	

Span	5.0mm	
Number of poles	4P	

Plastic parts	Pa66 UL94V-0	
---------------	--------------	--

Screw	M3 iron nickel plating	
-------	------------------------	--

Order type:

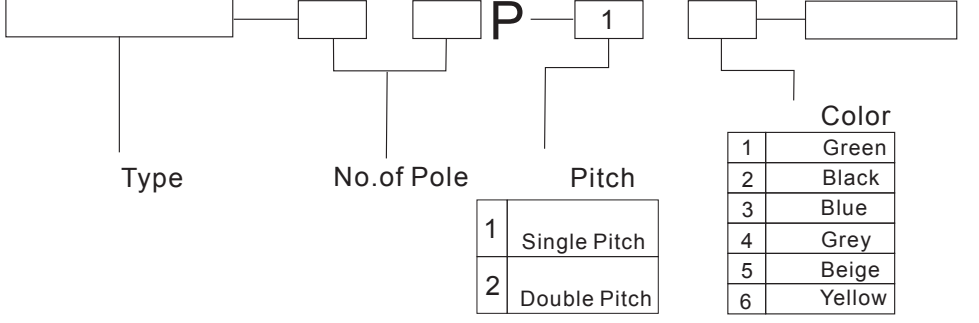

MM (INCH) CIXI SNAHE APPLIANCE & PLASTICS CO., LTD.

THIRD ANGLE PROJECTION NAME SH801-22.5