


# Переключатели мгновенного действия

## Features

- Reliability is excellent.
- It's has long life and more operating force can be applied such as lightly force.
- Good feeling and more levers are applied.

E88392

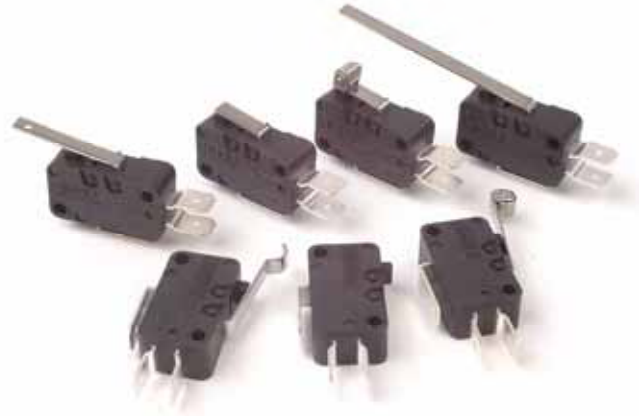

## Applications

- Joystick , TV game , Time recorder , Air conditioner , Food processor , Juice maker , Alarm , Mixer , Shredder machine , etc.

## Specifications

Item	Standard
Rating	16(4)A 250V AC
Conforming to standards	IEC 1058-1; UL 1054
Contact Resistance	15 mΩ max. (initial ) Between terminals of same polarity AC 1000V (50/60Hz for 1minute)
Dielectric Strength	Between each terminal and non-current-carrying rind parts AC 2000V ( 50/60Hz for 1 minute)
Electrically Life	100,000 cycles
Mechanically Life	1,000,000 cycles

## Product Selection

VT16     
1 2 3


### 1. ACTUATOR TYPES

- |                       |                              |
|-----------------------|------------------------------|
| 00: Pin plunger       | 04: Simulated roller lever   |
| 01: Short hinge lever | 05: Short hinge roller lever |
| 02: Hinge lever       | 06: Hinge roller lever       |
| 03: Long hinge lever  |                              |


### 2. Contact Form & Common Terminal Position

Contact form	1: SPDT	2: SPST-NC	3: SPST-NO
Common terminal position	bottom 	bottom 	bottom 

### Mounting Holes



### 3. Terminal Type

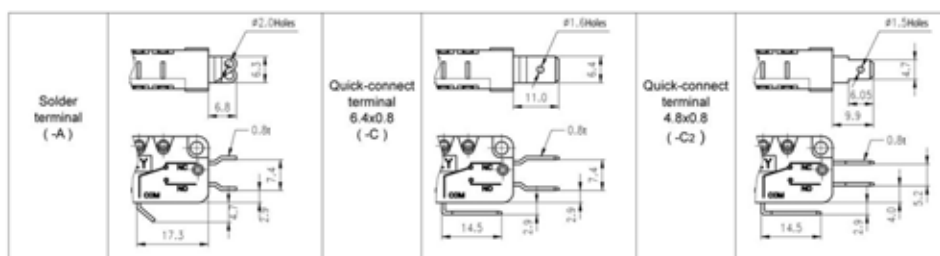

# Переключатели мгновенного действия

## Operating Characteristics

Unit :mm


### Item NO.

### Dimensions

#### VT1600




<u>OF</u>	max.	250g
RF	min.	30g
PT	max.	1.4 mm
OT	min.	0.8 mm
MD	max.	0.4 mm
OP		14.7±0.4 mm

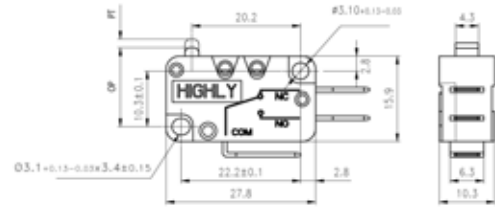

#### VT1601




<u>OF</u>	max.	250g
RF	min.	20g
PT	max.	1.6 mm
OT	min.	0.8 mm
MD	max.	0.4 mm
OP		15.2±0.6 mm

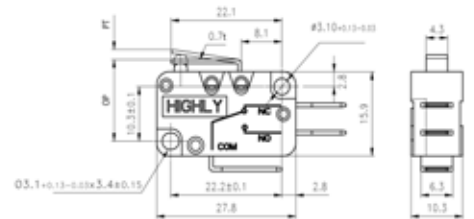

#### VT1602



<u>OF</u>	max.	120g
RF	min.	10g
PT	max.	3.2 mm
OT	min.	1.8 mm
MD	max.	1.0mm
OP		15.2±1.5 mm

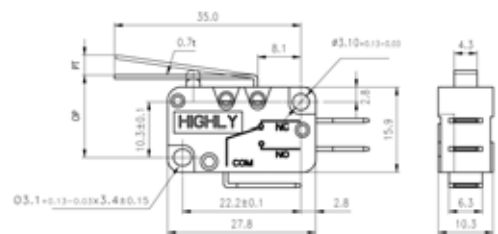

#### VT1603



<u>OF</u>	max.	60g
RF	min.	5g
PT	max.	8.0 mm
OT	min.	3.0 mm
MD	max.	2.2mm
OP		15.2±2.6 mm

