

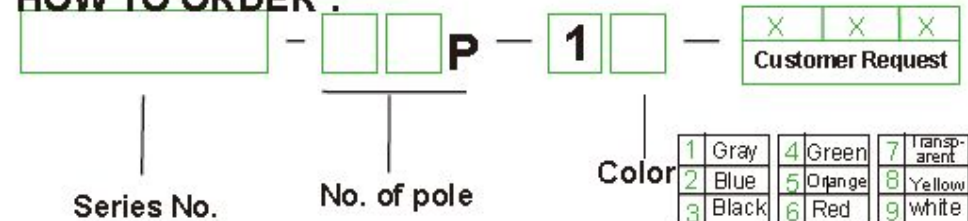


<b>Approval</b>		
<b>Electrical</b>		
<b>Standard</b>	<b>UL</b>	<b>IEC</b>
Rated voltage	300V	250V
Rated current	8A	8A
Rated impulse voltage	2.5KV	
<b>Mechanical</b>		
Ambient temperature	-40°C~+140 °C	
<b>Dimensions</b>		
Pitch	3.5(.138" ) 3.81(.150 " )	
Poles	2P-12P	
<b>Material</b>		
Housing	PA4 6,UL94 V-0	
Pin header	Copper, Tin plated	

### HOW TO ORDER :



 	 <b>DEGSON ELECTRONICS CO., LTD.</b> <b>NAME</b> <b>15EDGVC-THR-3.5 ,15EDGVC-THR-3.81</b>
--	--