


### 2EDGKD-7.5/7.62

- PUSH-IN连接技术，快速接线；
- 蝶式弹片，抗振性能良好；
- 提供带法兰与不带法兰两种选择；
- 最大线径：2.5mm<sup>2</sup>。
- Fast wiring thanks to the PUSH-IN connection technology;
- Butterfly spring structure, good anti-vibration performance;
- There are both standard and flange structure to choose;
- Max. wire range : 2.5mm<sup>2</sup>.

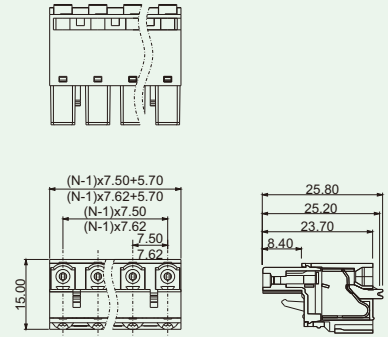

### 技术参数 Technical Data

APPROVAL: 


型号 Model	线径 Wire range	线数 Poles	EN61984技术参数(EN61984 datasheet)				UL技术参数(UL datasheet)			
			电压(V)	Rated voltage	电流(A)	Rated current	电压(V)	Rated voltage	电流(A)	Rated current
2EDGKD-7.5/7.62	0.2-2.5mm <sup>2</sup> /26-12AWG	02-12P		400		20		300		15

### 应用行业 Application

工业自动化、电梯、电力电气、仪器仪表、安防等行业。  
Industrial automation, elevator, electric power, instrument, security etc.



### 附件 Accessory



### 产品匹配 Counterparts

	2EDGVC/RC-7.5/7.62	2EDGVM/RM-7.5/7.62
2EDGKD-7.5/7.62	●	
2EDGKDM-7.5/7.62		●

### 型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
2EDGKD-7.5/7.62	GFKC2.5/...-ST-7.5	HWxxA0520000G

### 产品包装方式 Packing

Product model	Pcs./Pkt.
2EDGKD-7.5/7.62-02P	910
2EDGKD-7.5/7.62-03P	575
2EDGKD-7.5/7.62-04P	430
2EDGKD-7.5/7.62-05P	335
2EDGKD-7.5/7.62-06P	285
2EDGKD-7.5/7.62-07P	240

Product model	Pcs./Pkt.
2EDGKD-7.5/7.62-08P	200
2EDGKD-7.5/7.62-09P	190
2EDGKD-7.5/7.62-10P	155
2EDGKD-7.5/7.62-11P	140
2EDGKD-7.5/7.62-12P	125

### 产品订货 How to order

