


8EDG-STDBM-7.5

- 面板安装和导轨安装两种方式可选择；
- 90°导线转接；
- 防错插结构设计；
- 笼式弹簧结构，抗振动；
- Available for panel or din rail installation;
- 90°wiring direction;
- Misplug prevention structure;
- Spring-cage structure , shock-proof;

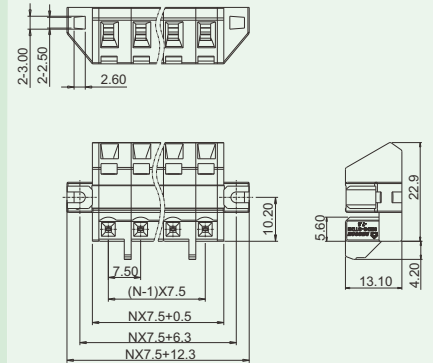

技术参数 Technical Data

APPROVAL: CE

型号 Model	线径 Wire range	线数 Poles	IEC60947技术参数(IEC60947 datasheet)				UI1059技术参数(UL1059 datasheet)			
			电压(V)	Rated voltage	电流(A)	Rated current	电压(V)	Rated voltage	电流(A)	Rated current
8EDG-STD/M-7.5	0.2-2.5mm ² /28-12AWG	02-12P	630		12		300		15	
8EDG-STDB/M-7.5	0.2-2.5mm ² /28-12AWG	02-12P	630		12		300		15	

应用行业 Application

电梯行业、真空断路器（电力行业）
Elevator industry, Vacuum breaker (Power industry)



产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
8EDG-STD-7.5-02P	50	8EDG-STD-7.5-07P	50
8EDG-STD-7.5-03P	50	8EDG-STD-7.5-08P	50
8EDG-STD-7.5-04P	50	8EDG-STD-7.5-09P	50
8EDG-STD-7.5-05P	50	8EDG-STD-7.5-10P	50
8EDG-STD-7.5-06P	50	8EDG-STD-7.5-12P	50

型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
8EDG-STD/M-7.5	721	—
8EDG-STDB/M-7.5	721	—

产品订货 How to order

8EDG-STD-7.5	X	X	P	1	Y	0 1 AH Standard
Series No.	No. of Pole					
	1 Single pitch	2 Double pitch				通用色 General Color 1 Grey PANTONE 429C DEGSON 41