


<b>APPROVAL</b>	CE	
<b>Electrical</b>		
Standard	UL	IEC
Rated voltage	300V	250V
Rated current	2A	4A
Wire range	-	-
Withstanding voltage	AC2000V/1Min	




<b>Mechanical</b>		
Ambient temperature	-40°C ~ +85°C	

<b>Dimensions</b>		
pitch	7.5mm (. 295" )	
Poles	1P-18P	

<b>Material</b>		
Housing	PC,UL94V-0	
Pin header	Brass, Tin-plated	
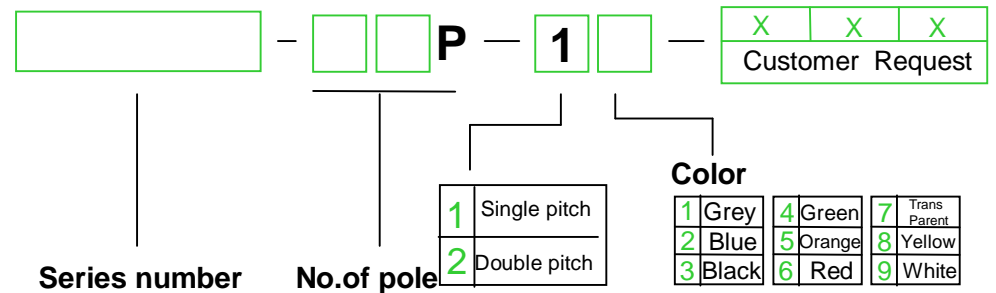
### HOW TO ORDER :



 mm (INCH)	 <b>DEGSON ELECTRONICS CO., LTD.</b>
 THROANGLE PROJECTION	<b>NAME</b> <b>DG106-7.5-10A</b>