DG210-3.5

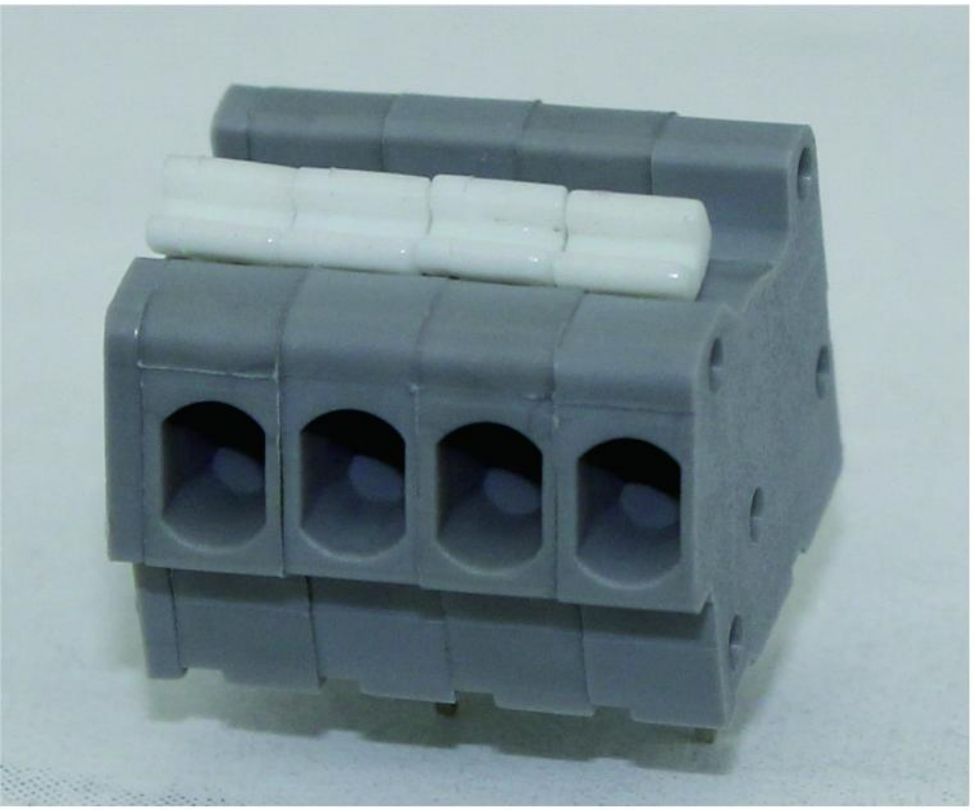

- PUSH-IN的连接技术，快速接线
- 可拼接结构,满足客户长线数结构需求
- 焊脚前后错位结构,满足UL300V电压要求
- Push-in connection technology，can wiring easily
- Each pole can be spliced to fulfill the needs that our customer require long poles products
- The dislocation structure offront and back pin header and fulfill the requirement of 300V voltage

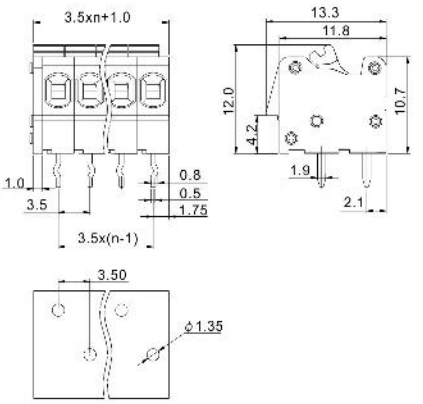

技术参数 Technical Data

APPROVAL: CE

型号 Model	线径 Wire range	线数 Poles	IEC60947技术参数(IEC60947 datasheet)		UL技术参数(UL datasheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DG210-3.5	0.2-1.5mm²/20-16AWG(SOL)	01P-XXP	250V	2A	300V	3A

应用行业 Application

照明,电源,安防等行业。

Lighting, power supply, security, etc.

型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
DG210-3.5	–	–

产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
DG210-3.5-01P-1Y		DG210-3.5-06P-1Y	7.4
DG210-3.5-02P-1Y	11.7	DG210-3.5-06P-2A	7
DG210-3.5-3P-1Y	9.6	DG210-3.5-07P-1Y	7.2
DG210-3.5-03P-13A	9.4	DG210-3.5-08P-1Y	7.4
DG210-3.5-04P-1Y	8.5	DG210-3.5-08P-2A	6.9
DG210-3.5-05P-1Y	8.3	DG210-3.5-09P-1Y	7
DG210-3.5-05P-14A		DG210-3.5-10P-1Y	6.9

产品订货 How to order

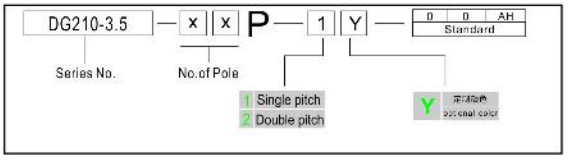

地址：中国宁波慈溪市逍林大道1585号
Add：No.1585,Xiaolin Road,Cixi,Ningbo China
Tel：+86-574-63504333 Fax：+86-574-63512345 E-mail：sale@degson.com www.degson.com