



DG211R-2.5

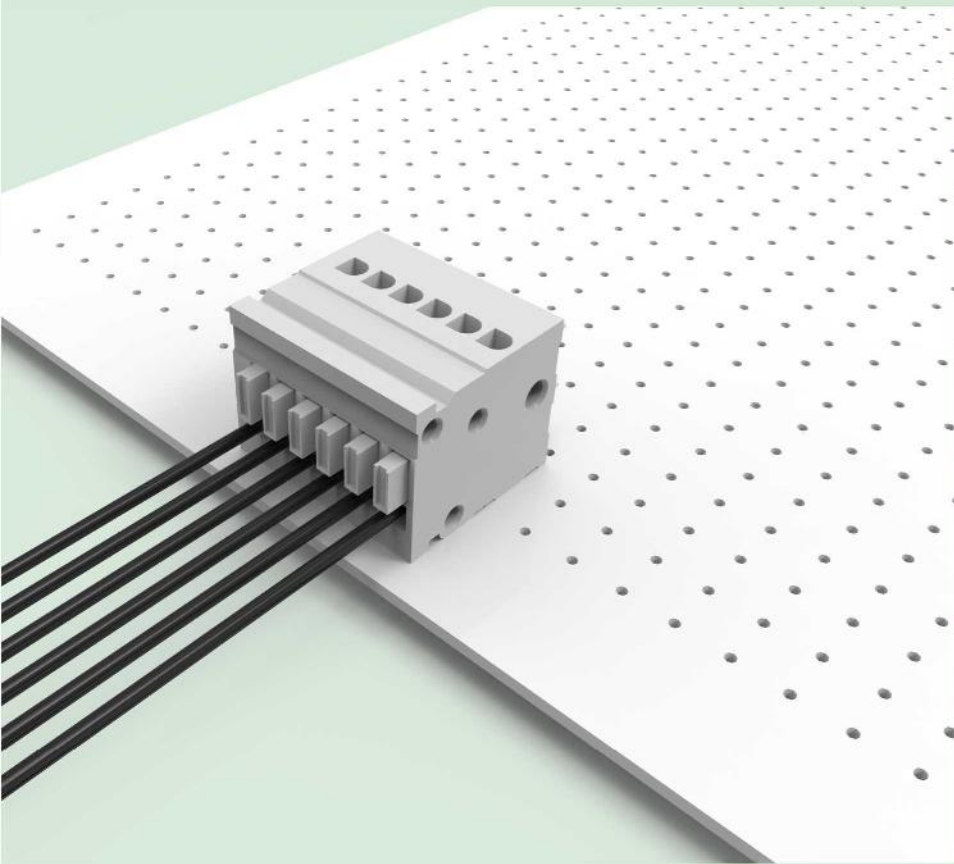

- Push-in弹簧结构，快速接线；
 - 带按钮结构，接取线方便；
 - 带测试孔；
 - 双排焊脚设计，保证产品强度；
 - 最大线径：0.5mm²。
- Push-in spring structure, fast operation.
 - Having the push button, convenient for pull wire.
 - Having the test hole.
 - Tho double rows pin header design to keep the strength of product.
 - Max. wire rage : 0.5mm².

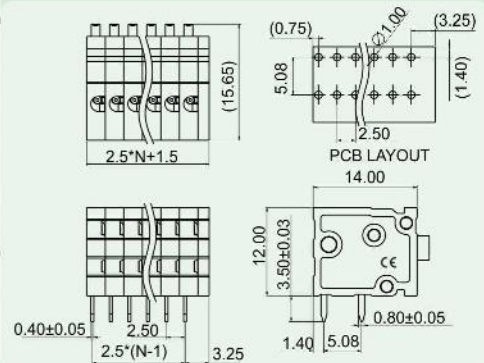

技术参数 Technical Data

APPROVAL: CE

型号 Model	线径 Wire range	线数 Poles	IEC60947技术参数(IEC60947 datasheet)		UL1059技术参数(UL1059 datasheet)	
			电压(V) Rated voltage	电流(A) Rated current	电压(V) Rated voltage	电流(A) Rated current
DG211R-2.5	0.2-0.5mm ² /28-20 AWG	02P-XXP	160	3	150	3

应用行业 Application

安防、仪器仪表、电源、照明等行业。
security, instrument, power supply, lighting etc.



产品包装方式 Packing

Product model	Pcs./Pkt.	Product model	Pcs./Pkt.
DG211R-2.5-02P	50	DG211R-2.5-08P	50
DG211R-2.5-03P	50	DG211R-2.5-09P	50
DG211R-2.5-04P	50	DG211R-2.5-10P	50
DG211R-2.5-05P	50	DG211R-2.5-11P	50
DG211R-2.5-06P	50	DG211R-2.5-12P	50
DG211R-2.5-07P	50		

型号对照 Cross Reference

DEGSON	同行1/ Competitor1	同行2/ Competitor2
DG211R-2.5	NA-2.5 Horizontal1	-

产品订货 How to order

