




# DEGSON ELECTRONICS CO., LTD.


## Product Specification



<b>Approval</b>	c	
<b>Electrical Standard</b>	<b>UL</b>	<b>IEC</b>
Rated voltage	300V	250V
Rated current	15A	24A
Wire range	22-14AWG	2.5mm <sup>2</sup>
With standing voltage	AC2000V/1Min	
Insulation Resistance	500M $\Omega$ /DC500V	
<b>Mechanical</b>		
Max. Torque Value	0.5N.m 4.4Lb.in	
Ambient temperature	-40 $^{\circ}$ C~+105 $^{\circ}$ C	
<b>Dimensions</b>		
Pitch	8.25mm(.325")	
Poles	2P-26P	
<b>Material</b>		
Housing	PA66+23%GF,UL94V-0	
Terminal	Brass,0.8t Tin plated	
Screws	Steel,M3 Ni plated	

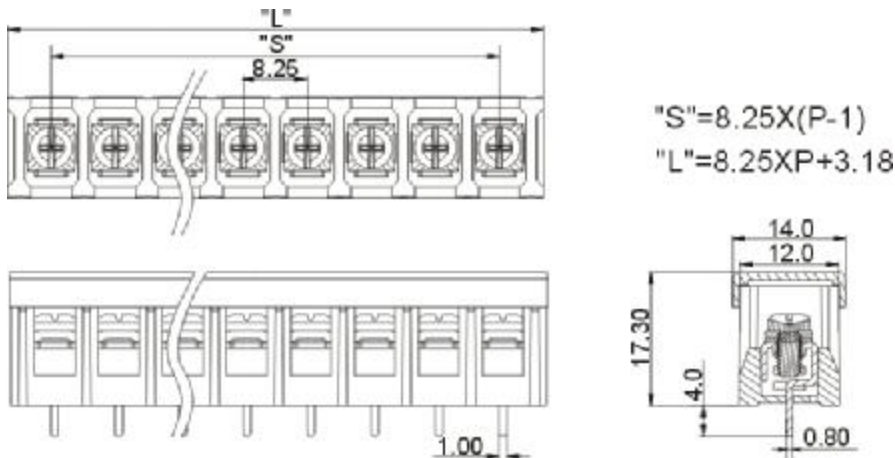

### HOW TO ORDER :

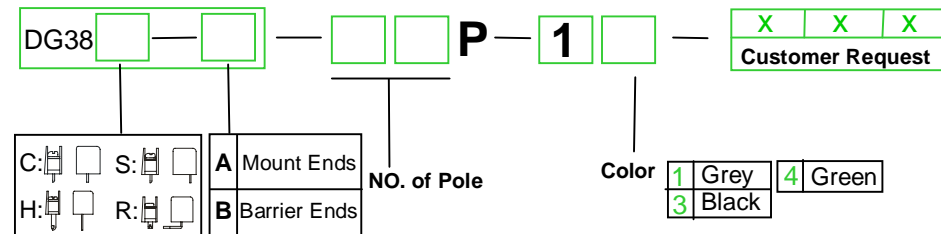

<b>Poles</b>	2	3	4	5	6	7	8	9	10	11	12	13	14	15
<b>L(mm)</b>	19.68	27.93	36.18	44.43	52.68	60.93	69.18	77.43	85.68	93.93	102.18	110.43	118.68	126.93
<b>S(mm)</b>	8.25	16.50	24.75	33.00	41.25	49.50	57.75	66.00	74.25	82.50	90.75	99.00	107.25	115.50
<b>Poles</b>	16	17	18	19	20	21	22	23	24	25	26	27	28	
<b>L(mm)</b>	135.18	143.43	151.68	159.93	168.18	176.43	184.68	192.93	201.18	209.43	217.68			
<b>S(mm)</b>	123.75	132.00	140.25	148.50	156.75	165.00	173.25	181.50	189.75	198.00	206.25			

 	 <b>DEGSON ELECTRONICS CO., LTD.</b>
NAME	<b>DG38C-B</b>