




# DEGSON ELECTRONICS CO., LTD.


## Product Specification



<b>Approval</b>		
<b>Electrical Standard</b>	<b>UL</b>	<b>IEC</b>
Rated voltage	300V	450V
Rated current	30A	41A
Wire range	22-10AWG	4.0mm <sup>2</sup>
With standing voltage	AC2000V/1Min	
Insulation Resistance	500M $\Omega$ /DC500V	
<b>Mechanical</b>		
Max. Torque Value	1.2N.m 10.6Lb.in	
Ambient temperature	-40 $^{\circ}$ C ~ +105 $^{\circ}$ C	
<b>Dimensions</b>		
Pitch	11.11mm (.437")	
Poles	2P-12P	
<b>Material</b>		
Housing	PA66, UL94V-0	
Terminal	Brass, 0.8t Tin plated	
Screws	Steel, M4 Ni plated	

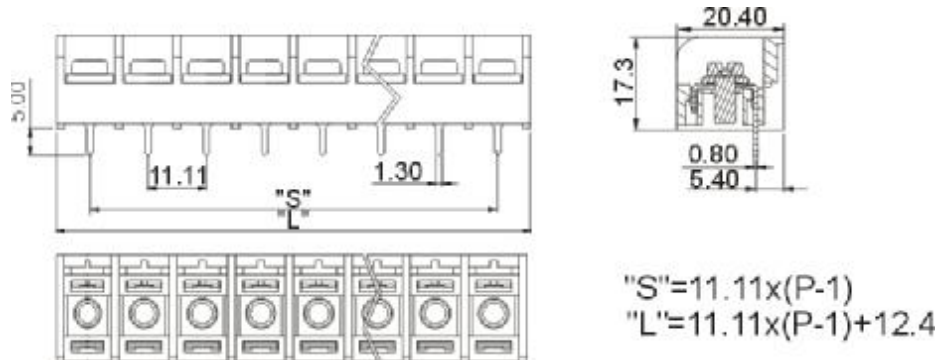

### HOW TO ORDER :

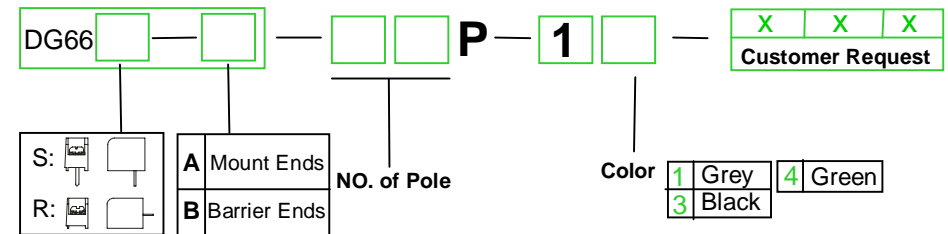

Poles	2	3	4	5	6	7	8	9	10	11	12	13	14	15
L(mm)	23.51	34.62	45.73	56.84	67.95	79.06	90.17	101.28	112.39	123.50	134.61	145.72	156.83	167.94
S(mm)	11.11	22.22	33.33	44.44	55.55	66.66	77.77	88.88	99.99	111.10	122.21	133.32	144.43	155.54
Poles	16	17	18	19	20	21	22	23	24	25	26	27	28	
L(mm)	179.05	190.16	201.27	212.38	223.49	234.60	245.71	256.82	267.93	279.04	290.15			
S(mm)	166.65	177.76	188.87	199.98	211.09	222.20	233.31	244.42	255.53	266.64	277.75			

	<b>DEGSON ELECTRONICS CO., LTD.</b>
	<b>NAME</b> <b>DG66S-B</b>