



DGR240-20A

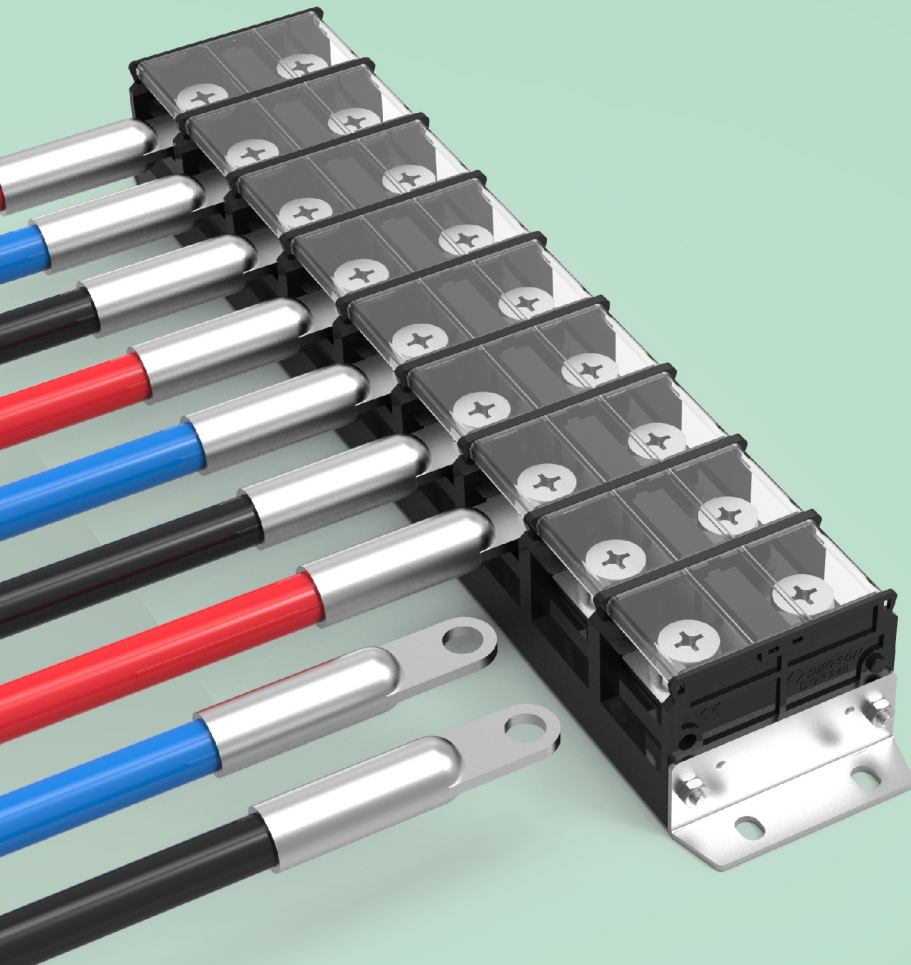

- 弹簧式垫圈螺钉连接技术；
- 优良的抗振动性能；
- 88kgf.cm的8.8级扭力标准，保证连接稳定；
- 铜质载流体，满足300A电流设计；
- 在DGR240-00AH的基础上新增一种带固定板的规格。
- Screw connection technology with spring washer;
- Excellent anti-vibration performance;
- Ensure 88kgf.cm torque, firm connection;
- Brass current carrier, ensure 300A current request;
- Increasing a new specification with fixing structure based on DGR240-00AH.

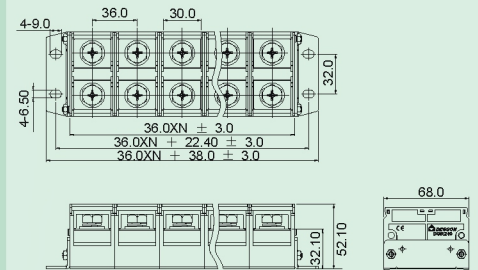

技术参数 Technical data

APPROVAL: CE

| 型号 Model | 线径 Wire range | 线数 Poles | IEC60947技术参数 (IEC60947 data sheet) | | UL1059技术参数 (UL1059 data sheet) | |
|-------------|------------------|-------------|------------------------------------|---------------------|--------------------------------|---------------------|
| | | | 电压(V) Rated voltage | 电流(A) Rated current | 电压(V) Rated voltage | 电流(A) Rated current |
| DGR240 | 4-250kcmil | 02-12P | 400 | 20 | 300 | 15 |

应用行业 Application

工业自动化，仪器仪表，新能源，电梯等行业。

Industrial automation, instrument, new energy, elevator etc.



产品包装方式 Packing

| Product model | Pcs./Pkt. | Product model | Pcs./Pkt. |
|----------------|-----------|----------------|-----------|
| DGR240-20A-02P | 10 | DGR240-20A-08P | 10 |
| DGR240-20A-03P | 10 | DGR240-20A-09P | 10 |
| DGR240-20A-04P | 10 | DGR240-20A-10P | 10 |
| DGR240-20A-05P | 10 | DGR240-20A-11P | 10 |
| DGR240-20A-06P | 10 | DGR240-20A-12P | 10 |
| DGR240-20A-07P | 10 | | |

型号对照 Cross reference

| DEGSON | 同行1/Competitor1 | 同行2/Competitor2 |
|--------|-----------------|-----------------|
| DGR240 | TR240 | - |

产品订货 How to order

