







PCMB 4



Approval	cUL US	
Electrical	UL	IEC
Standard		
Rated voltage	300V	500V
Rated current	30A	32A
Wire size	24-10AWG	0.2-4.0mm ²
T/W/End plate		6.2/26/1.5mm
Height(NS35:7.5/NS35:15/NS32)		32mm
Rated surge voltage/Contamination class		6KV/3
Stripping length		8mm
Screw thread/Tightening torque		M3/0.5N.m/4.5Lb-in
Internal cylindrical gage		A4
Insulating material/Inflammability class		PA/V-0
Specification	Model	Pieces
(1)Terminal block	PCMB 4	50
(2)Cover	D-PCMB 4	100
(3)Fixed bridge, with insulating collar	FBI 10-6	25
(4)Fixed bridge, with fixed crimped rolls		
(5)Insertion bridge	EB 2-6 EB 3-6 EB 10-6	100 100 50
(6)Isolator bridge bar		
(7)Bridge bar isolator		
(8)Switching bridge	SBRN 2-7	1
(6)Separating plate	TS-KK3	50
(7)Partition plate	ATP-PCMB	50
(8)Test plug socket	DSB 3/10/4	100
(13)Zack strip	ZB6	250

HOW TO ORDER :

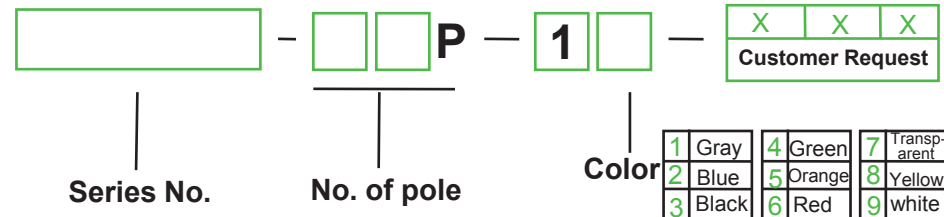

 mm (INCH)	 DEGSON ELECTRONICS CO., LTD.
 THROANGLE PROJECTION	NAME PCMB 4