
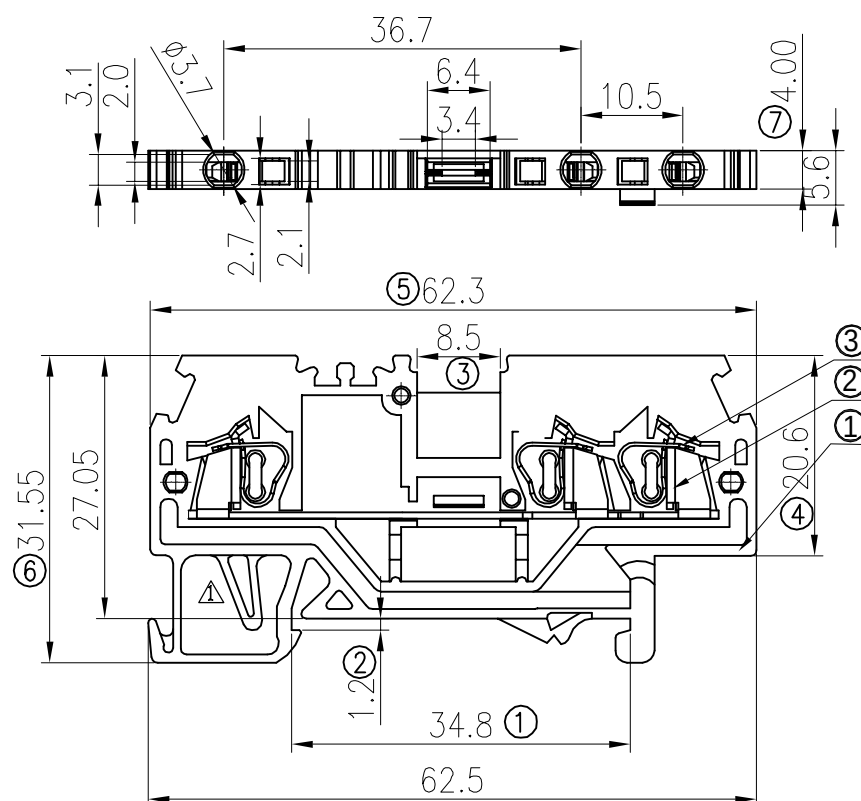


REVISION RECORD				
REV	ECO	DESCRIPTION	DRFT	DATE
△		增加限位结构	CW	05/18/09

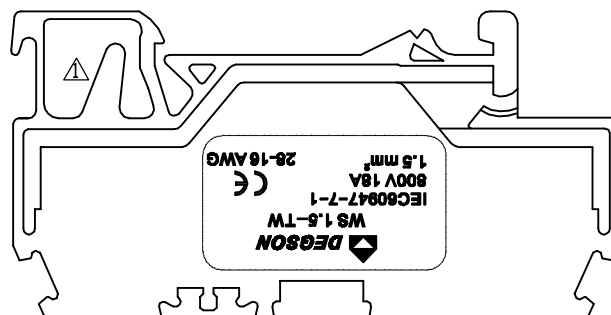

Notes:

- 1.Rated voltage/current:UL1059 600V/10A
IEC 800V/18A
- 2.Operation temperatures:-40℃~+105℃
- 3.Withstanding Voltage:AC3000V/1Min
- 4.Insulation Resistance:5000MΩ /DC1000V
- 5.Wire Range:28~16AWG,1.5mm²
- 6.Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	WS 1.5-Shrapnel	X000001700(H)	3	Stainless Steel	
2	WS 1.5-TW-Current Carrier	6129B00010(H)	1	Copper	Sn
1	WS 1.5-TW-Housing	6129A0Y01A(H)	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
MM (INCH) TOLERANCES EXCEPT AS NOTED MM .0 ± .00 ± .000 ± ± ANGLES ± 1° THIRD ANGLE PROJECTION DFTO Yangys CHKD MFO APPVL G.E FINISH SCALE DATE 10/23/08 DATE DATE DATE					
DEGSON NAME WS 1.5-TW-01P-1Y-00A(H) DRAWING NO. WS 1.5-TW-E01 SIZE A3 REV T1 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD DO NOT SCALE DRAWING SHEET 1 OF 1					