


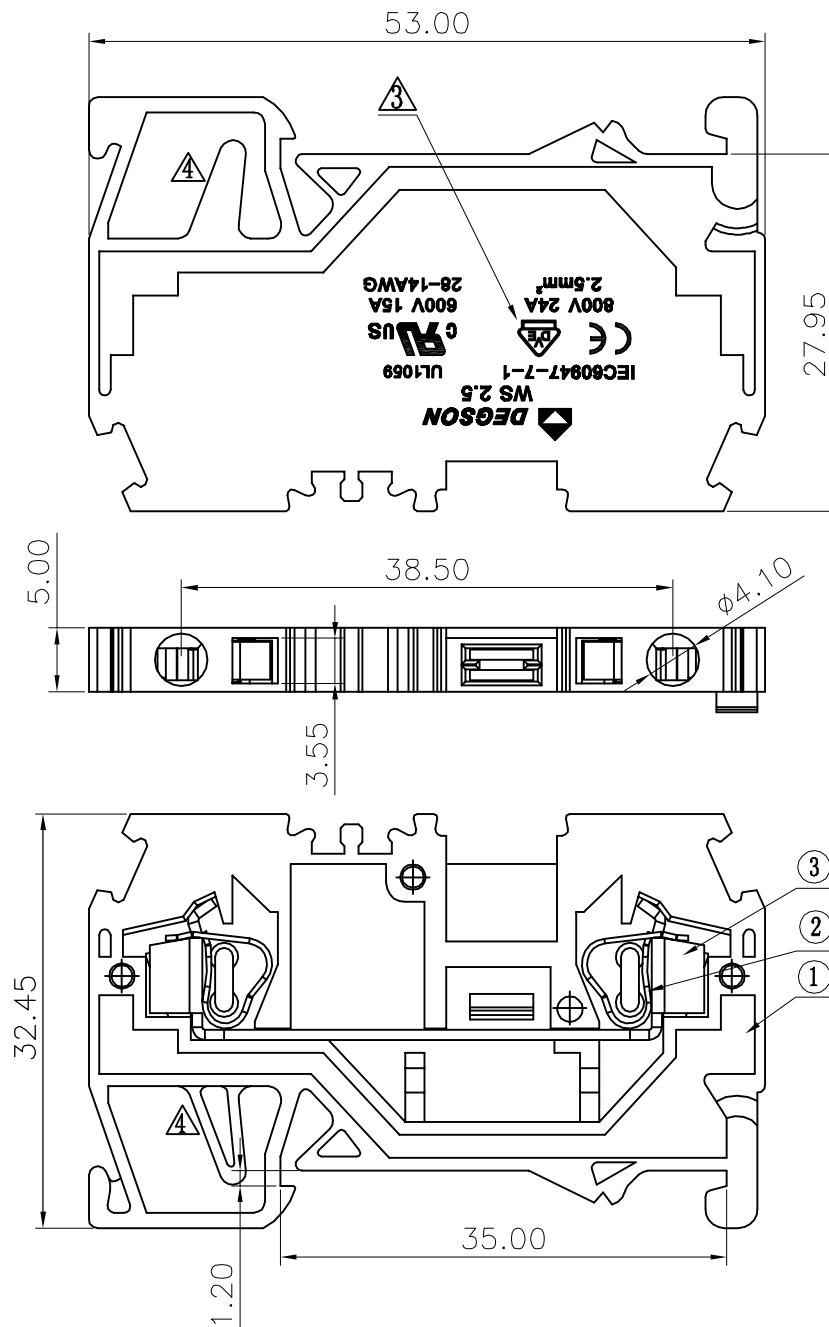

Notes:

1. Rated voltage/current:UL 600V/15A
VDE 800V/24A
2. Operation temperatures:-40℃~+105℃
3. Withstanding Voltage:AC8000V/1Min
4. Insulation Resistance:5000MΩ /DC1000V
5. Wire Range:28~14AWG, 2.5mm²
6. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm					—
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	over 150	⌒ ▯
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

3	WS 2.5-Current Carrier	6027B00010 (H)	1	Copper	SnCe plated		
2	DG242-5. 0-Shrapnel	X000000990 (H)	2	Stainless steel			
1	WS 2.5-Housing	6027A0Y01A(H)	1	PA66	UL94V-0		
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES		
DETAILED LISTS			DFTO	LYK	DATE 12/01/06"		
	TOLERANCES EXCEPT AS NOTED:		CHKD		DATE		
			INFO		DATE		
			APPVL		DATE		
	MM .0 ± .00 ± .000 ±	± ± ±	NAME WS2. 5-01P-1Y-00A (H)				
	ANGLES ± 1°						
	G. E :						
		FINISH :		DRAWING NO. WS2. 5-E01		SIZE A3	REV T4
		SCALE : 1:1		/PART NO.		06/18/09	
	THIRD ANGLE PROJECTION			DO NOT SCALE DRAWING		SHEET 1 OF 1	