



MMBTRC416E...MMBTRC422E

NPN Silicon Epitaxial Planar Transistor

for switching, interface circuit and drive circuit applications

Features

- With built-in bias resistors
- Simplify circuit design
- Reduce a quantity of parts and manufacturing process




1.Base 2.Emitter 3.Collector
SOT-523 Plastic Package

Resistor Values

Type	R1 (KΩ)	R2 (KΩ)
MMBTRC416E	1	10
MMBTRC417E	2.2	2.2
MMBTRC418E	2.2	10
MMBTRC419E	4.7	10
MMBTRC420E	10	4.7
MMBTRC421E	47	10
MMBTRC422E	100	100

Absolute Maximum Ratings (T_a = 25 °C)

Parameter	Symbol	Value	Unit
Output Voltage	V _o	50	V
Input Voltage	V _i	MMBTRC416E	10, - 5
		MMBTRC417E	12, - 10
		MMBTRC418E	12, - 5
		MMBTRC419E	20, - 7
		MMBTRC420E	30, - 10
		MMBTRC421E	40, - 15
		MMBTRC422E	40, - 10
Output Current	I _o	100	mA
Total Power Dissipation	P _{tot}	100	mW
Junction Temperature	T _j	150	°C
Storage Temperature Range	T _{stg}	- 55 to + 150	°C



SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited




MMBTRC416E...MMBTRC422E


Characteristics at $T_a = 25\text{ }^\circ\text{C}$

Parameter	Symbol	Min.	Typ.	Max.	Unit	
DC Current Gain at $V_O = 5\text{ V}$, $I_O = 5\text{ mA}$ at $V_O = 5\text{ V}$, $I_O = 20\text{ mA}$ at $V_O = 5\text{ V}$, $I_O = 10\text{ mA}$ at $V_O = 5\text{ V}$, $I_O = 10\text{ mA}$ at $V_O = 5\text{ V}$, $I_O = 10\text{ mA}$ at $V_O = 5\text{ V}$, $I_O = 5\text{ mA}$ at $V_O = 5\text{ V}$, $I_O = 5\text{ mA}$	MMBTRC416E MMBTRC417E MMBTRC418E MMBTRC419E MMBTRC420E MMBTRC421E MMBTRC422E	G_I	33 20 33 30 24 33 62	- - - - - - -	- - - - - - -	- - - - - - -
Output Cutoff Current at $V_O = 50\text{ V}$		$I_{O(OFF)}$	-	-	500	nA
Input Current at $V_I = 5\text{ V}$	MMBTRC416E MMBTRC417E MMBTRC418E MMBTRC419E MMBTRC420E MMBTRC421E MMBTRC422E	I_I	- - - - - - -	- - - - - - -	7.2 3.8 3.8 1.8 0.88 0.16 0.15	mA
Output Voltage at $I_O = 10\text{ mA}$, $I_I = 0.5\text{ mA}$ at $I_O = 10\text{ mA}$, $I_I = 0.5\text{ mA}$ at $I_O = 10\text{ mA}$, $I_I = 0.5\text{ mA}$ at $I_O = 10\text{ mA}$, $I_I = 0.5\text{ mA}$ at $I_O = 10\text{ mA}$, $I_I = 0.5\text{ mA}$ at $I_O = 10\text{ mA}$, $I_I = 0.5\text{ mA}$ at $I_O = 5\text{ mA}$, $I_I = 0.25\text{ mA}$	MMBTRC416E MMBTRC417E MMBTRC418E MMBTRC419E MMBTRC420E MMBTRC421E MMBTRC422E	$V_{O(ON)}$	- - - - - - -	- - - - - - -	0.3 0.3 0.3 0.3 0.3 0.3 0.3	V
Input Voltage (ON) at $V_O = 0.3\text{ V}$, $I_O = 20\text{ mA}$ at $V_O = 0.3\text{ V}$, $I_O = 20\text{ mA}$ at $V_O = 0.3\text{ V}$, $I_O = 20\text{ mA}$ at $V_O = 0.3\text{ V}$, $I_O = 20\text{ mA}$ at $V_O = 0.3\text{ V}$, $I_O = 2\text{ mA}$ at $V_O = 0.3\text{ V}$, $I_O = 2\text{ mA}$ at $V_O = 0.3\text{ V}$, $I_O = 1\text{ mA}$	MMBTRC416E MMBTRC417E MMBTRC418E MMBTRC419E MMBTRC420E MMBTRC421E MMBTRC422E	$V_{I(ON)}$	- - - - - - -	- - - - - - -	3 3 3 2.5 3 5 3	V
Input Voltage (OFF) at $V_{CC} = 5\text{ V}$, $I_O = 100\text{ }\mu\text{A}$	MMBTRC416E MMBTRC417E MMBTRC418E MMBTRC419E MMBTRC420E MMBTRC421E MMBTRC422E	$V_{I(OFF)}$	0.3 0.5 0.3 0.3 0.8 1 0.5	- - - - - - -	- - - - - - -	V
Transition Frequency at $V_O = 10\text{ V}$, $I_O = 5\text{ mA}$		$f_T^{1)}$	-	250	-	MHz

¹⁾ Characteristic of transistor only.










SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



Dated : 25/11/2010 Rev:01








MMBTRC416E...MMBTRC422E

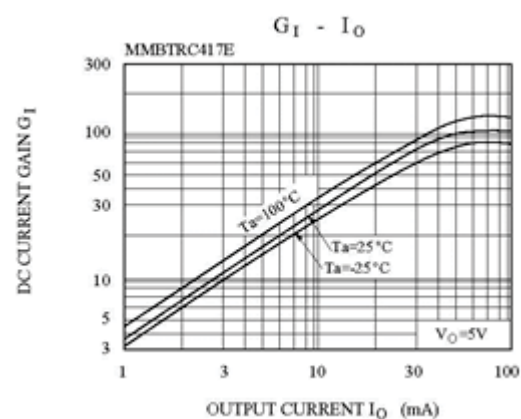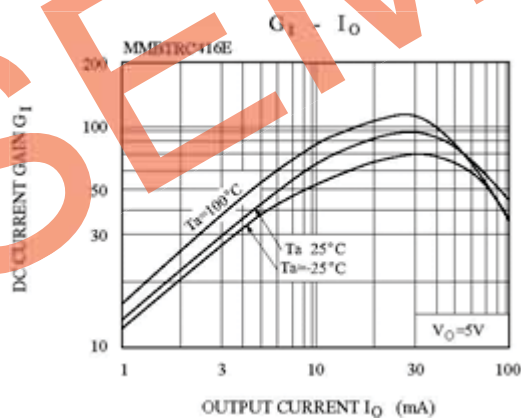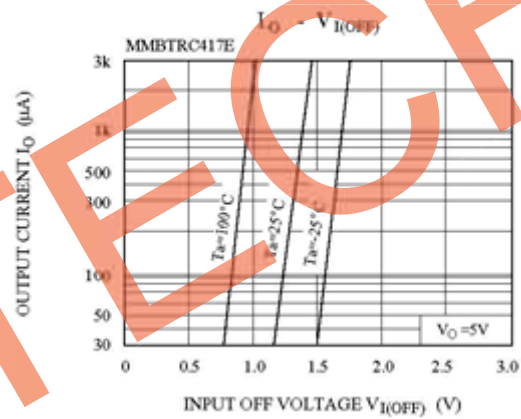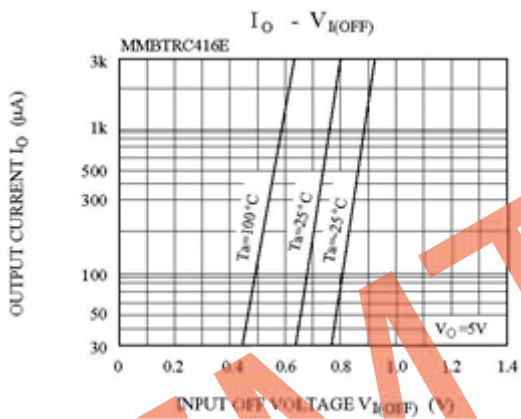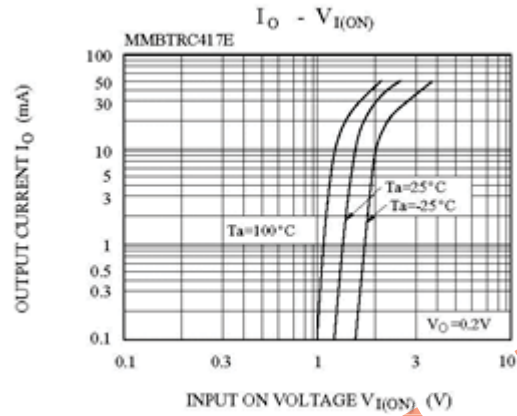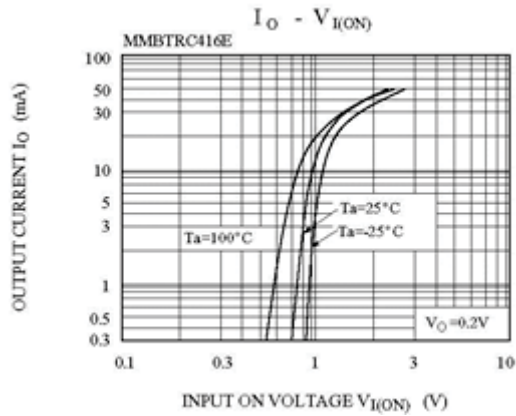

SEMTECH ELECTRONICS LTD.
 Subsidiary of Sino-Tech International (BVI) Limited










MMBTRC416E...MMBTRC422E

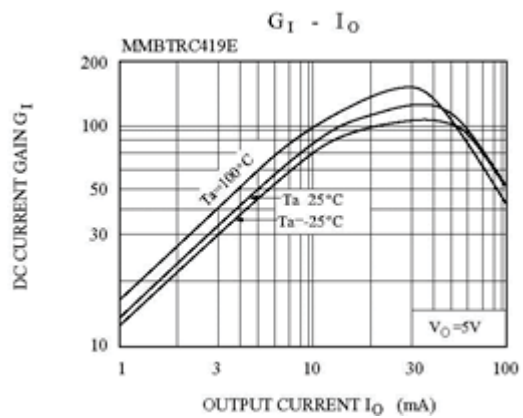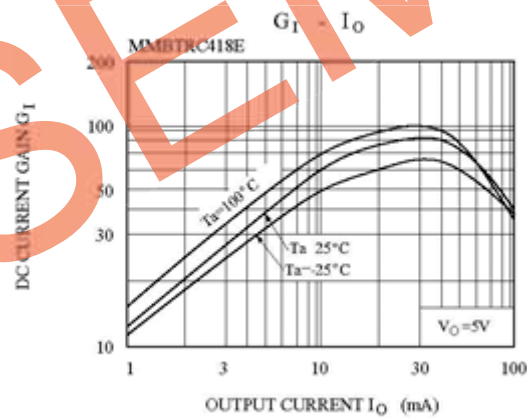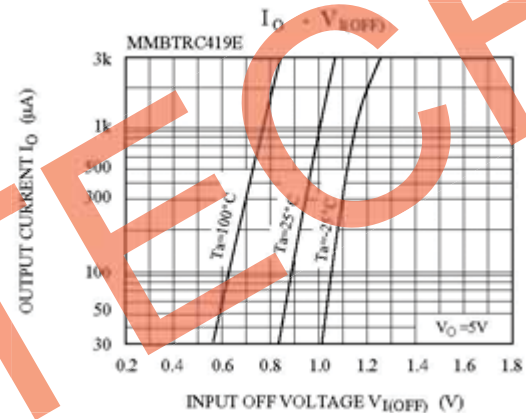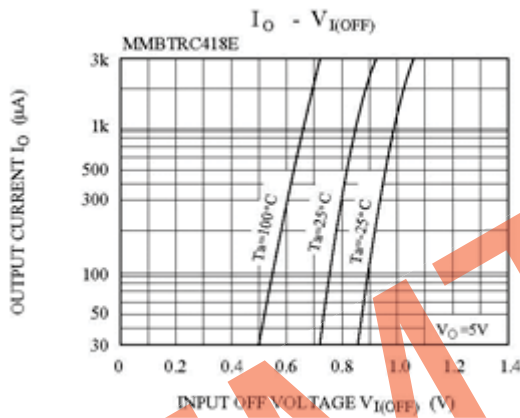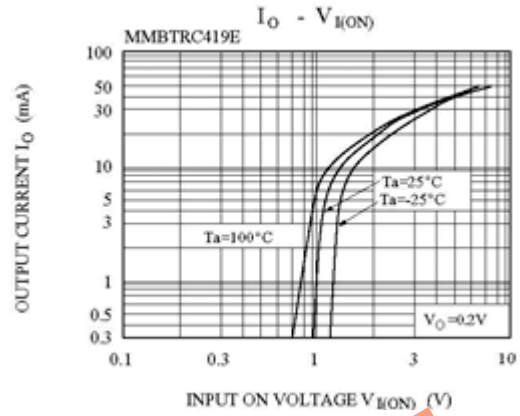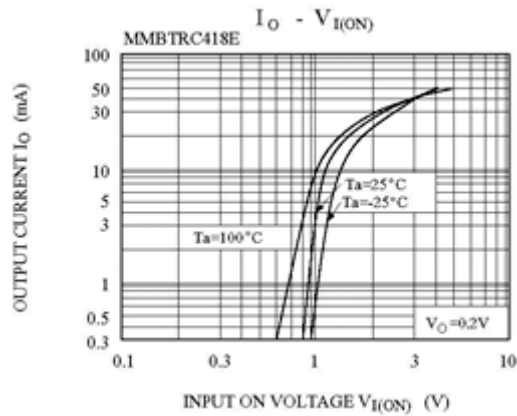

SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited






MMBTRC416E...MMBTRC422E

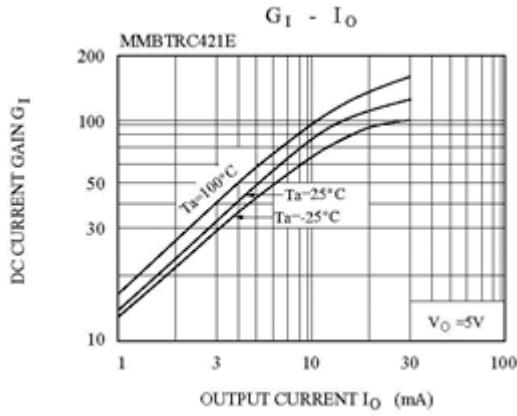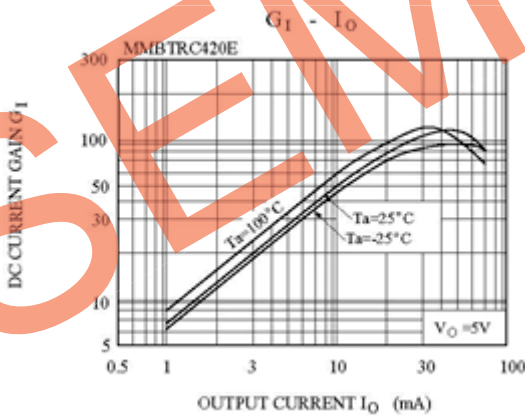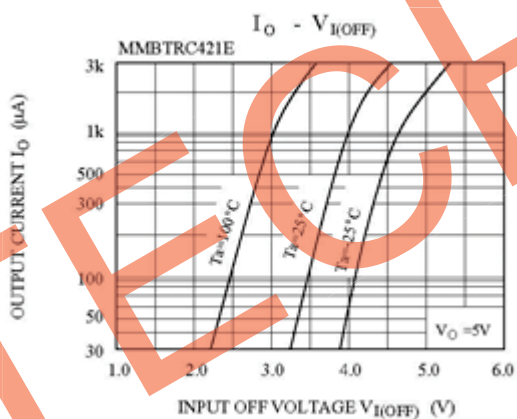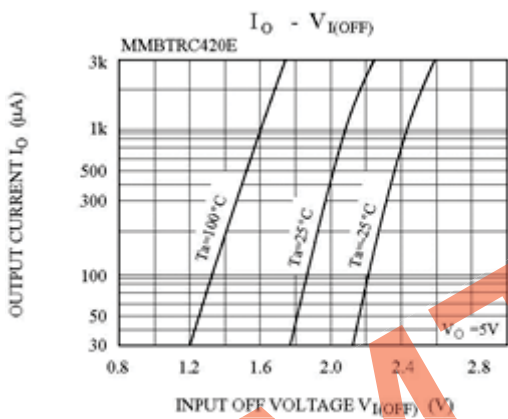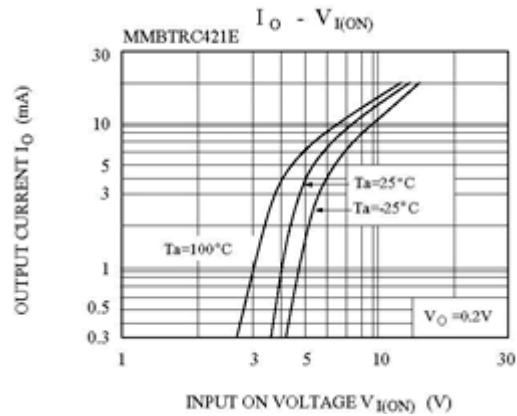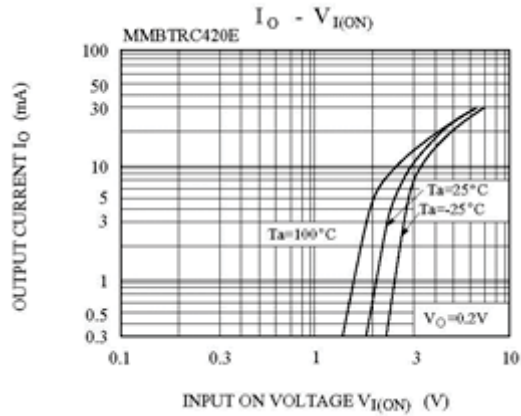


SEMTECH ELECTRONICS LTD.
Subsidiary of Sino-Tech International (BVI) Limited



MMBTRC416E...MMBTRC422E

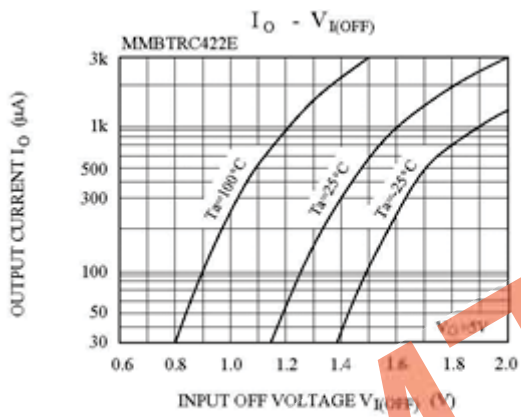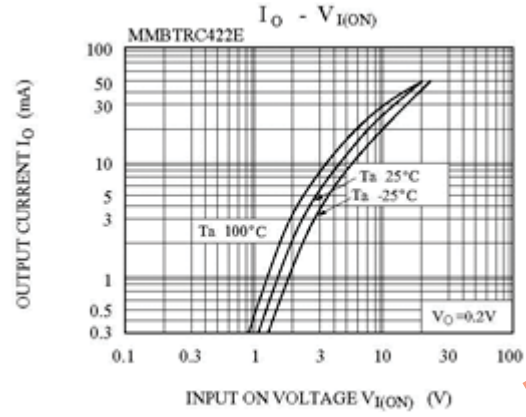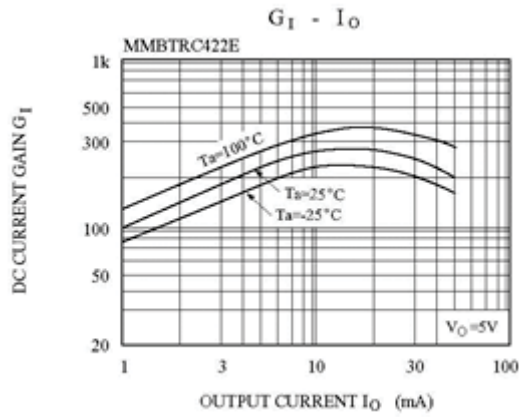

SEMTECH



SEMTECH ELECTRONICS LTD.
 Subsidiary of Sino-Tech International (BVI) Limited

