




CEP6056/CEB6056

N-Channel Enhancement Mode Field Effect Transistor

FEATURES

- 60V, 100A, $R_{DS(ON)} = 6.2m\Omega$ @ $V_{GS} = 10V$.
- Super high dense cell design for extremely low $R_{DS(ON)}$.
- High power and current handling capability.
- Lead free product is acquired.
- TO-220 & TO-263 package.



ABSOLUTE MAXIMUM RATINGS $T_C = 25^\circ C$ unless otherwise noted

| Parameter | Symbol | Limit | Units |
|---|----------------|------------|---------------|
| Drain-Source Voltage | V_{DS} | 60 | V |
| Gate-Source Voltage | V_{GS} | ± 20 | V |
| Drain Current-Continuous | I_D | 100 | A |
| Drain Current-Pulsed ^a | I_{DM} | 360 | A |
| Maximum Power Dissipation @ $T_C = 25^\circ C$ - Derate above $25^\circ C$ | P_D | 100 | W |
| | | 0.66 | W/ $^\circ C$ |
| Single Pulsed Avalanche Energy ^d | E_{AS} | 272 | mJ |
| Single Pulsed Avalanche Current ^d | I_{AS} | 33 | A |
| Operating and Store Temperature Range | T_J, T_{stg} | -55 to 175 | $^\circ C$ |

Thermal Characteristics

| Parameter | Symbol | Limit | Units |
|---|-----------------|-------|--------------|
| Thermal Resistance, Junction-to-Case | $R_{\theta JC}$ | 1.5 | $^\circ C/W$ |
| Thermal Resistance, Junction-to-Ambient | $R_{\theta JA}$ | 62.5 | $^\circ C/W$ |



CEP6056/CEB6056

Electrical Characteristics $T_C = 25^\circ\text{C}$ unless otherwise noted

| Parameter | Symbol | Test Condition | Min | Typ | Max | Units |
|---|--------------|--|-----|------|------|------------|
| Off Characteristics | | | | | | |
| Drain-Source Breakdown Voltage | BV_{DSS} | $V_{GS} = 0V, I_D = 250\mu A$ | 60 | | | V |
| Zero Gate Voltage Drain Current | I_{DSS} | $V_{DS} = 60V, V_{GS} = 0V$ | | | 1 | μA |
| Gate Body Leakage Current, Forward | I_{GSSF} | $V_{GS} = 20V, V_{DS} = 0V$ | | | 100 | nA |
| Gate Body Leakage Current, Reverse | I_{GSSR} | $V_{GS} = -20V, V_{DS} = 0V$ | | | -100 | nA |
| On Characteristics^b | | | | | | |
| Gate Threshold Voltage | $V_{GS(th)}$ | $V_{GS} = V_{DS}, I_D = 250\mu A$ | 2 | | 4 | V |
| Static Drain-Source On-Resistance | $R_{DS(on)}$ | $V_{GS} = 10V, I_D = 20A$ | | 5 | 6.2 | m Ω |
| Dynamic Characteristics^c | | | | | | |
| Forward Transconductance | g_{FS} | $V_{DS} = 25V, I_D = 50A$ | | 21 | | S |
| Input Capacitance | C_{iss} | $V_{DS} = 25V, V_{GS} = 0V, f = 1.0\text{ MHz}$ | | 3215 | | pF |
| Output Capacitance | C_{oss} | | | 375 | | pF |
| Reverse Transfer Capacitance | C_{rss} | | | 215 | | pF |
| Switching Characteristics^c | | | | | | |
| Turn-On Delay Time | $t_{d(on)}$ | $V_{DD} = 30V, I_D = 50A, V_{GS} = 10V, R_{GEN} = 3.6\Omega$ | | 27 | 54 | ns |
| Turn-On Rise Time | t_r | | | 15 | 30 | ns |
| Turn-Off Delay Time | $t_{d(off)}$ | | | 58 | 116 | ns |
| Turn-Off Fall Time | t_f | | | 15 | 30 | ns |
| Total Gate Charge | Q_g | $V_{DS} = 48V, I_D = 50A, V_{GS} = 10V$ | | 77 | 100 | nC |
| Gate-Source Charge | Q_{gs} | | | 15 | | nC |
| Gate-Drain Charge | Q_{gd} | | | 30 | | nC |
| Drain-Source Diode Characteristics and Maximum Ratings | | | | | | |
| Drain-Source Diode Forward Current | I_S | | | | 100 | A |
| Drain-Source Diode Forward Voltage ^b | V_{SD} | $V_{GS} = 0V, I_S = 50A$ | | | 1.3 | V |
| Notes : □ a.Repetitive Rating : Pulse width limited by maximum junction temperature b.Pulse Test : Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$. □ c.Guaranteed by design, not subject to production testing. □ d.L = 0.5mH, $I_{AS} = 33A, V_{DD} = 24V, R_G = 25\Omega$, Starting $T_J = 25\text{ C}$ | | | | | | |



CEP6056/CEB6056

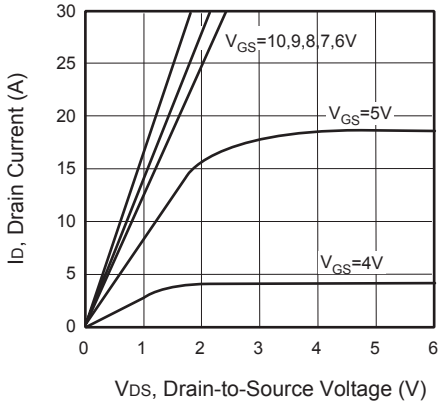


Figure 1. Output Characteristics

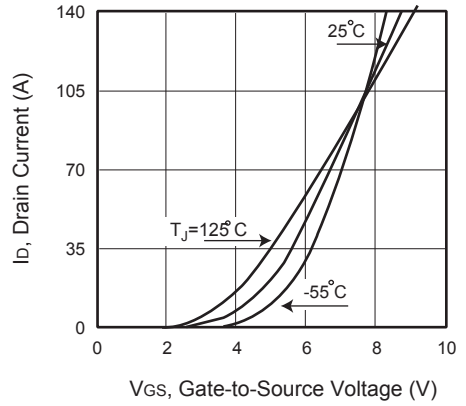


Figure 2. Transfer Characteristics

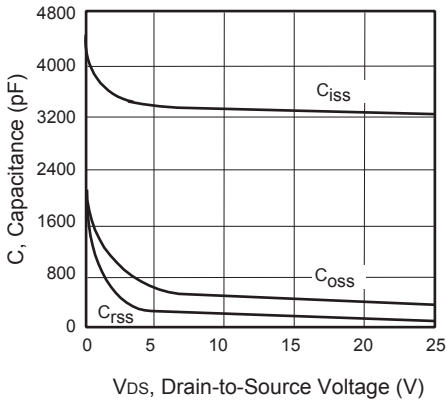


Figure 3. Capacitance

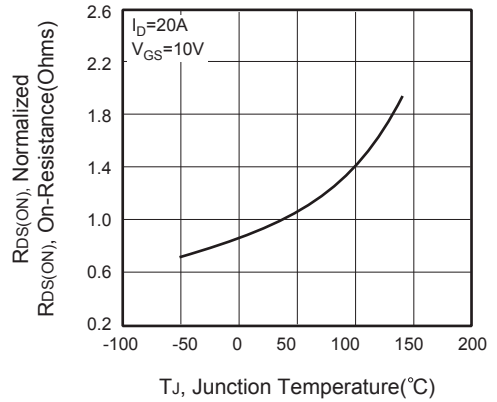


Figure 4. On-Resistance Variation with Temperature



Figure 5. Gate Threshold Variation with Temperature

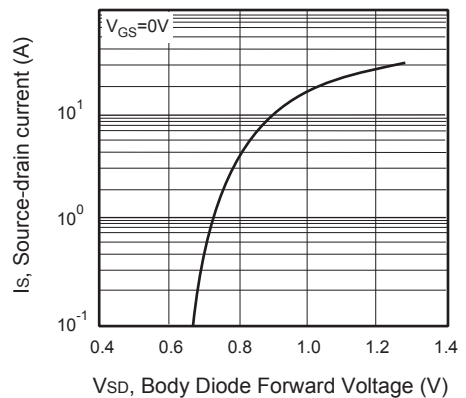


Figure 6. Body Diode Forward Voltage Variation with Source Current



CEP6056/CEB6056

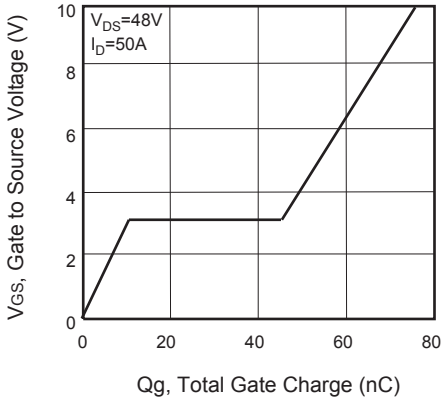


Figure 7. Gate Charge

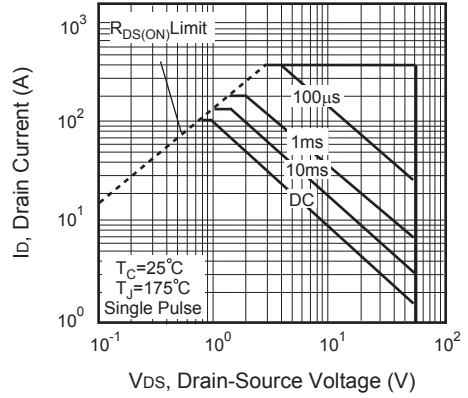


Figure 8. Maximum Safe Operating Area



Figure 9. Switching Test Circuit



Figure 10. Switching Waveforms

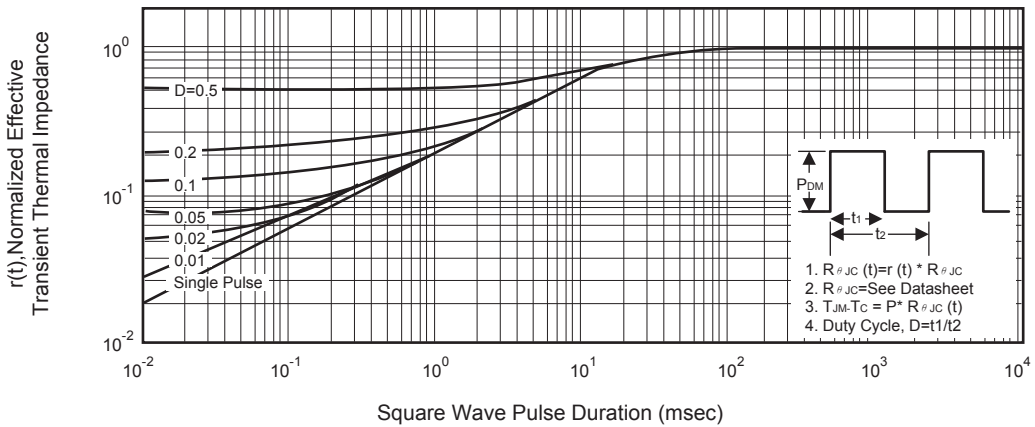


Figure 11. Normalized Thermal Transient Impedance Curve