

REV	CONTENT	CHK	DATE
V0.0	CONTENT	ZCL	25.09.29

Electrical :

	UL	IEC
1.Rated Voltage :	300V	160V
2.Rated Current :	8A	8A
3.Wire Range:	22-16AWG	0.34-1.5mm ²
4.Stripping Length :	9-10mm	
5.Operating Temperature :	-40℃~+115℃	
6.RoHS Compliance		
7."★" is the key quality control point		

GT212D - 3.81 -03P - 1 3 - 00

① ② ③ ④ ⑤ ⑥

① Series NO. ④ 1 Single Pitch
2 Double Pitch


② Pitch
③ Poles
03 03Contacts
06 06Contacts
...
36 36Contacts

⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White

⑥ Customer Request: 00--Standard

4	SHRAPNEL	XX	3	STAINLESS STEEL	/
3	CONTACTS	XX	3	Copper alloy	Tin Plated
2	BUTTON	XX	3	POM(White)	UL94-HB
1	HOUSING	XX	1	PA66	UL94V-0
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	ZCL	DATE	25.09.29	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE			SCALE	1:1
APP.	DATE			NAME	GT212D-3.81-03P-13-00
				DWGNO.	XXXX

Grolten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.

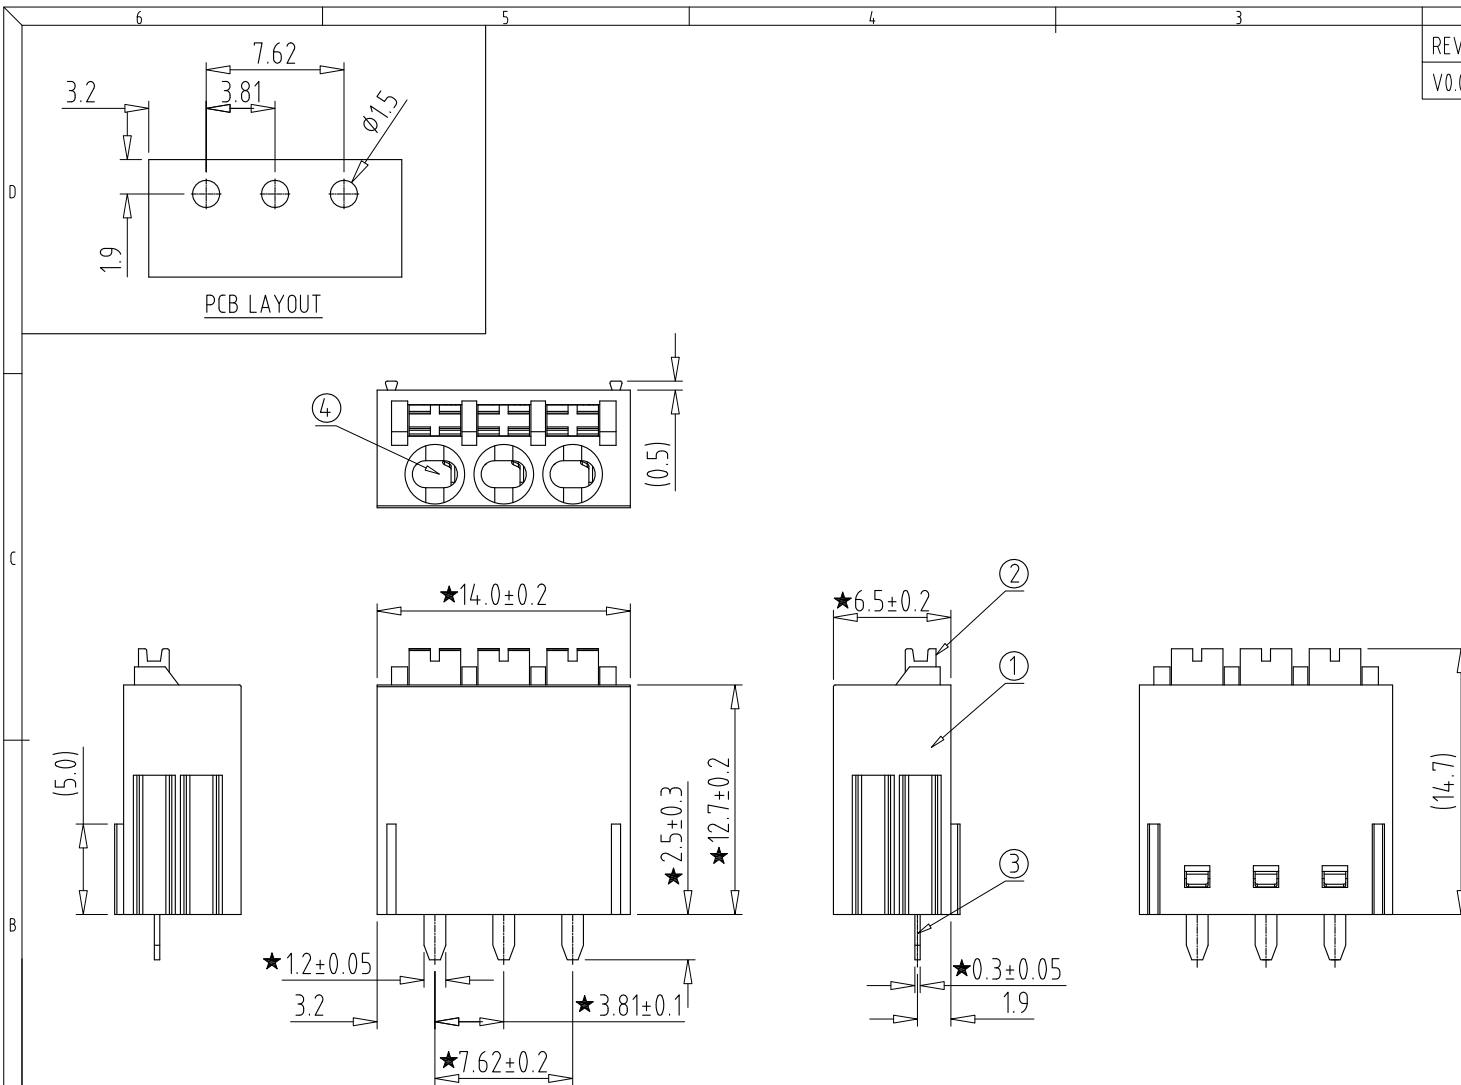

A	Total Pitch Tolerances									Nominal dimension range									$\perp$		$\equiv$		---		$//$	
	in mm									in mm																
	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 0	over 10	all	over 0	over 100	over 150		
	to 30	to 53	to 70	to 90	to 115	to 150	to 250	to 350	to 500	to 30	to 53	to 70	to 90	to 115	to 150	to 200	to 250	to 320	to 10	to 10		to 100	to 150	to 150		
	±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5		