



Shenzhen Hi-Link Electronic Co.,Ltd

## 10W Ultra-Compact Power Module

**10M03/10M05/10M09/10M12/10M24**



# Contents

|   |    |
|---|----|
| 1. Miniature Series Power Supply Module.....                      | 1  |
| 2. Product Model.....   | 1  |
| 3. Product Characteristics.....                                   | 1  |
| 4. Environment Condition.....                                     | 2  |
| 5. Electrical Character.....                                      | 2  |
| 5.1. Input characteristics.....                                   | 2  |
| 5.2. Output Characteristic (3.3V/3000mA).....                     | 3  |
| 5.3. Output Characteristic (5V/2000mA).....                       | 4  |
| 5.4. Output Characteristic (9V/1100mA).....                       | 5  |
| 5.5. Output Characteristic (12V/830mA).....                       | 6  |
| 5.6. Output Characteristic (24V/420mA).....                       | 7  |
| 6. Input voltage and load characteristics .....                   | 8  |
| 7. Working environment temperature and load characteristics ..... | 8  |
| 8. Typical application circuit.....                               | 9  |
| Input section.....  | 9  |
| Output section.....   | 10 |
| 9. Safety Characteristic.....                                     | 10 |
| 9.1. Certification.....   | 10 |
| 9.2. Safety and electromagnetic compatibility.....                | 10 |
| 9.3. Temperature rise safety design.....                          | 10 |
| 10. Marking, packing, transportation, storage.....                | 11 |
| 10.1. Marking.....  | 11 |
| 10.1.1. Product marking.....                                      | 11 |
| 10.1.2. Packing marking.....                                      | 11 |
| 10.2. Packing.....  | 11 |
| 10.3. Transportation.....   | 11 |
| 10.4. Storage.....  | 11 |
| 11. Weight and Dimensions.....                                    | 12 |

## 1. Miniature Series Power supply Module

The 10W ultra-small series power supply module is a small volume, high efficiency power module designed for customers by Hi-Link. It has the advantage of global input voltage range, low temperature rise, low power consumption, high efficiency, high reliability, high security isolation etc.,and has been widely used in smart home, automation control, communication equipment, instruments and other industries.

## 2. Product Model

| Type Number<br>(MODEL) | Size<br>(mm)   | Output Power<br>(W) | Output Voltage<br>(V) | Output Current<br>(mA) | Notes |
|------------------------|----------------|---------------------|-----------------------|------------------------|-------|
| HLK-10M03              | 46.9*27.8*21.8 | 10                  | 3.3                   | 3000                   |       |
| HLK-10M05              |                |                     | 5                     | 2000                   |       |
| HLK-10M09              |                |                     | 9                     | 1100                   |       |
| HLK-10M12              |                |                     | 12                    | 830                    |       |
| HLK-10M24              |                |                     | 24                    | 416                    |       |

## 3. Product Characteristics

1. Ultra-thin, ultra-small, minimum volume in the industry
2. Universal input voltage (90-265Vac)
3. Low power consumption, environmental protection, no-load loss <0.1W
4. Low ripple and low noise
5. Good output short circuit and over-current protection and self-recovery
6. High efficiency, high power density
7. Input-output isolated voltage-proof 3000Vac
8. 100% full load aging and testing
9. High reliability, long life design, continuous working time more than 100000 hours
10. Meet UL,CE requirements; product design meets EMC and safety test requirements
11. Adopt high quality environmental protection waterproof heat conduction glue to fill seal, moisture-proof, anti-vibration, meet the IP65 standard of waterproof and dust proof
12. Economic solution, cost-effective
13. Work without an external circuit
14. 1 year warranty

## 4. Environment Condition

| Project Name          | Technical Criteria  | Unit | Remarks  |
|-----------------------|---|------|--|
| Working Temperature   | -25—+60   | °C   |  |
| Storage Temperature   | -40—+80   | °C   |  |
| Relative Humidity     | 5—95  | %    |  |
| Heat Dissipation Mode | natural cooling   |      |  |
| Atmospheric Pressure  | 80—106  | Kpa  |  |
| Sea Level Elevation   | ≤2000   | m    |  |
| Vibrate               | Vibration coefficient<br>10~500Hz,2G10min./1cycle,<br>60min.each along X,Y,Z axes |      | Meet the requirements<br>of secondary road<br>transportation |

## 5. Electrical Character

### 5.1. Input characteristics

| Project Name                  | Technical Criteria                | Unit | Remarks      |
|-------------------------------|-----------------------------------|------|--------------|
| Rated Input Voltage           | 90-265                            | Vac  |              |
| Input Voltage Range           | 85-264                            | Vac  | Or 70-350Vdc |
| Maximum input current         | ≤0.2                              | A    |              |
| Input surge current           | ≤10                               | A    |              |
| Maximum input voltage         | ≤270                              | Vac  |              |
| Input slow start              | ≤50                               | mS   |              |
| Input low voltage efficiency  | Vin=110Vac , output full load ≥69 | %    |              |
| Input high voltage efficiency | Vin=220Vac , output full load≥70  | %    |              |
| Long-term reliability         | MTBF≥100 , 000                    | h    |              |
| External fuse recommendation  | 0.5A/250Vac                       |      | Slow fuse    |

Note: test at room temperature

## 5.2. Output Characteristic (3.3V/3000mA)

| Project Name                          | Technical Criteria   | Unit | Remarks                        |
|---------------------------------------|--|------|--------------------------------|
| No-load rated output voltage          | 3.3±0.1  | Vdc  |                                |
| Full load rated output voltage        | 3.3±0.2  | Vdc  |                                |
| Short-time maximum output current     | ≥3000  | mA   |                                |
| Long time maximum output current      | ≥3300  | mA   |                                |
| voltage regulation                    | ±2   | %    |                                |
| load regulation                       | ±0.5   | %    |                                |
| Output ripple and noise (mVp-p)       | ≤50<br>Rated input voltage, full output load. Using 20MHz bandwidth oscilloscope,<br>Load side and 10uF and 0.1uF capacitors are tested. | mV   |                                |
| Switching machine overshoot amplitude | (rated input voltage, output plus 10% load)≤5  | %VO  |                                |
| Output over-current protection        | 110-150% of maximum output load  | A    |                                |
| Output short circuit protection       | Direct short circuit in normal output and automatic return to normal operation after removal of short circuit                            |      | No damage to the whole machine |

### 5.3. Output Characteristic (5V/2000mA)

| Project Name                          | Technical Criteria   | Unit | Remarks                        |
|---------------------------------------|--|------|--------------------------------|
| No-load rated output voltage          | 5±0.1  | Vdc  |                                |
| Full load rated output voltage        | 5±0.2  | Vdc  |                                |
| Short-time maximum output current     | ≥2200  | mA   |                                |
| Long time maximum output current      | ≥2000  | mA   |                                |
| voltage regulation                    | ±0.2   | %    |                                |
| load regulation                       | ±0.5   | %    |                                |
| Output ripple and noise (mVp-p)       | ≤50<br>Rated input voltage, full output load. Using 20MHz bandwidth oscilloscope,<br>Load side and 10uF and 0.1uF capacitors are tested. | mV   |                                |
| Switching machine overshoot amplitude | (rated input voltage, output plus 10% load)≤5  | %VO  |                                |
| Output over-current protection        | 110-150% of maximum output load  | A    |                                |
| Output short circuit protection       | Direct short circuit in normal output and automatic return to normal operation after removal of short circuit                            |      | No damage to the whole machine |

## 5.4. Output Characteristic (9V/1100mA)

| Project Name                          | Technical Criteria   | Unit            | Remarks                        |
|---------------------------------------|--|-----------------|--------------------------------|
| No-load rated output voltage          | 9±0.1  | Vdc             |                                |
| Full load rated output voltage        | 9±0.2  | Vdc             |                                |
| Short-time maximum output current     | ≥1200  | mA              |                                |
| Long time maximum output current      | ≥1100  | mA              |                                |
| voltage regulation                    | ±2   | %               |                                |
| load regulation                       | ±0.5   | %               |                                |
| Output ripple and noise (mVp-p)       | ≤70<br><br>Rated input voltage, full output load. Using 20MHz bandwidth oscilloscope,<br><br>Load side and 10uF and 0.1uF capacitors are tested. | mV              |                                |
| Switching machine overshoot amplitude | (rated input voltage, output plus 10% load)≤5  | %V <sub>O</sub> |                                |
| Output over-current protection        | 110-150% of maximum output load  | A               |                                |
| Output short circuit protection       | Direct short circuit in normal output and automatic return to normal operation after removal of short circuit                                    |                 | No damage to the whole machine |


## 5.5. Output Characteristic (12V/830mA)

| Project Name                          | Technical Criteria   | Unit            | Remarks                        |
|---------------------------------------|--|-----------------|--------------------------------|
| No-load rated output voltage          | 12±0.1   | Vdc             |                                |
| Full load rated output voltage        | 12±0.2   | Vdc             |                                |
| Short-time maximum output current     | ≥900   | mA              |                                |
| Long time maximum output current      | ≥830   | mA              |                                |
| voltage regulation                    | ±2   | %               |                                |
| load regulation                       | ±0.5   | %               |                                |
| Output ripple and noise (mVp-p)       | ≤70<br>Rated input voltage, full output load. Using 20MHz bandwidth oscilloscope,<br>Load side and 10uF and 0.1uF capacitors are tested. | mV              |                                |
| Switching machine overshoot amplitude | (rated input voltage, output plus 10% load)≤5  | %V <sub>O</sub> |                                |
| Output over-current protection        | 110-150% of maximum output load  | A               |                                |
| Output short circuit protection       | Direct short circuit in normal output and automatic return to normal operation after removal of short circuit                            |                 | No damage to the whole machine |

## 5.6. Output Characteristic (24V/420mA)


| Project Name                          | Technical Criteria   | Unit            | Remarks                        |
|---------------------------------------|--|-----------------|--------------------------------|
| No-load rated output voltage          | 24±0.1   | Vdc             |                                |
| Full load rated output voltage        | 24±0.2   | Vdc             |                                |
| Short-time maximum output current     | ≥480   | mA              |                                |
| Long time maximum output current      | ≥420   | mA              |                                |
| voltage regulation                    | ±2   | %               |                                |
| load regulation                       | ±0.5   | %               |                                |
| Output ripple and noise (mVp-p)       | ≤70<br>Rated input voltage, full output load. Using 20MHz bandwidth oscilloscope,<br>Load side and 10uF and 0.1uF capacitors are tested. | mV              |                                |
| Switching machine overshoot amplitude | (rated input voltage, output plus 10% load)≤5  | %V <sub>O</sub> |                                |
| Output over-current protection        | 110-150% of maximum output load  | A               |                                |
| Output short circuit protection       | Direct short circuit in normal output and automatic return to normal operation after removal of short circuit                            |                 | No damage to the whole machine |

## 6. Input voltage and load characteristics

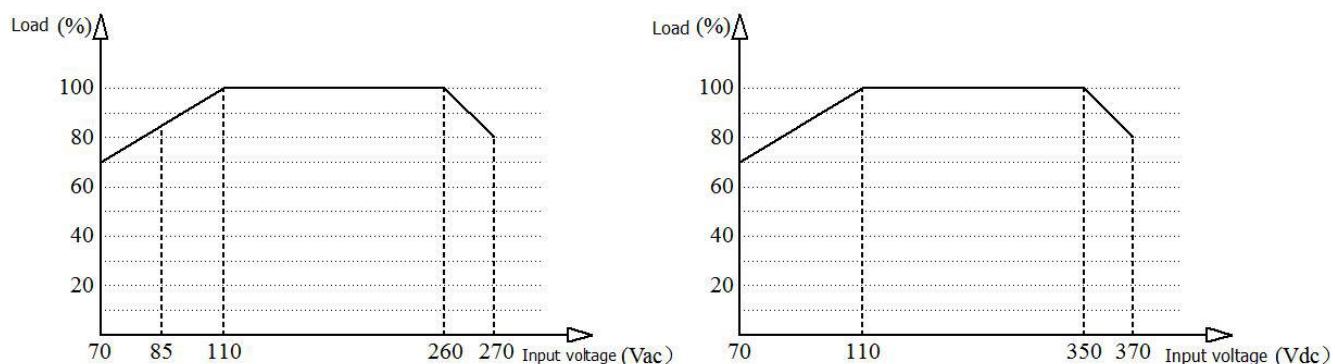

Input voltage and load characteristic curve


## 7. Working environment temperature and load characteristics

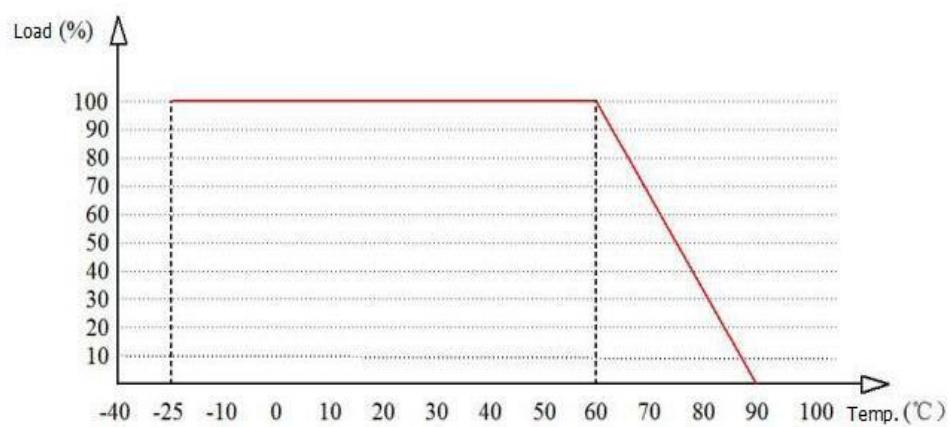


Ambient temperature and load characteristic curve

## 8. Typical application circuit

### Input section

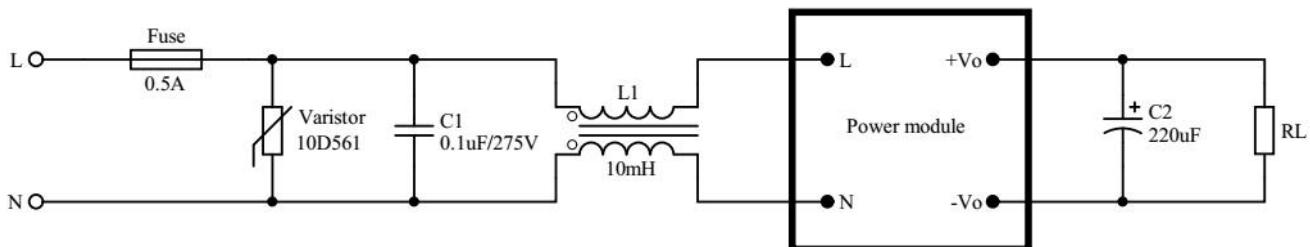
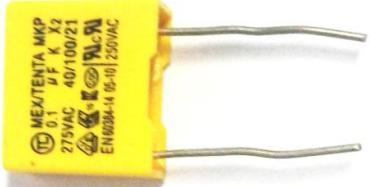
| Component bit number / recommended device  | Function  | Recommended value                         |
|--|---|---|
| Fuse   | Protect the circuit from damage when the module is abnormal | 0.5A/250Vacsnow fuses.                    |
| Varistor   | The cumulative surge is to protect the module from damage   | 10D561K                                   |
| C1/ Safety capacitance   | Filtering, Security Protection (EMC Authentication)         | 0.1uF/275Vac                              |
| L1/ common-mode inductance   | EMI filter  | Inductive value 10-15mH, current 70-500mA |
|   |   | Safety capacitance                        |
|  |   | Common-mode inductance                    |

Remarks:

Fuse and varistor are basic protective circuits.

If you need to pass the authentication, the Anchorage capacitance and common-mode inductance must not be omitted.

## Output Part

| Component bit number / recommended device | Function  | Recommended value   |
|---|---|---|
| C2/filter capacitance                     | Filter, output ripple can be controlled in 30mV after adding this capacitor | Aluminium electrolytic capacitance, capacity 100-220 UF, voltage reduction greater than 75% |
| RL/ load                                  | load  |   |

Note: C2 filter capacitor can reduce the output ripple from the original 50mV to the 30mV.

## 9. Safety Characteristic

### 9.1. Certification

Product design complies with UL,CE safety certification requirements. (UL,CE certification is done by customers themselves.)

### 9.2. Safety and electromagnetic compatibility:

- The input design adopts UL certification 1A insurance;
- The PCB board is made of double-sided copper clad foil, and the material fire resistance grade is 94-V0 grade;
- Safety standards comply with UL1012,EN60950,UL60950
- Insulation voltage: I/P-O/P:2500Vac
- Insulation resistance: I/P-O/P>100M Ohms/500Vdc 25°C 70% RH
- Conduction and radiation conformance to EN55011, EN55022 (CISPR22)
- Electrostatic discharge: IEC/EN 61000-4-2 level 4 8kV/15kV
- Radio frequency radiation immunity: IEC/EN 61000-4-3

### 9.3. Temperature rise safety design:

The maximum temperature rise of the internal surface of the power supply capacitor and the main converter is not more than 90 °C at room temperature, and the maximum temperature rise of the shell surface is not more than 60 °C.

## 10. Marking, packing, transportation, storage

### 10.1. Marking

#### 10.1.1. Product marking

A unique bar code label is affixed to ensure the traceability of information such as the production date and batch of each piece of product. Its content conforms to the national standard, the industry standard stipulation.

#### 10.1.2. Packing marking

The packing boxes are marked with the name of the manufacturer, site, zip code, product model, factory year, month, day;

Marked "up", "moisture-proof", "careful light" and other transport signs, all signs are in accordance with the GB 191 requirements.

### 10.2. Packing

The product uses the special absorption plastic box to separate the packing, has the vibration proof function, and conforms to the GB 3873 stipulation.

### 10.3. Transportation

The packaged products can be transported by any means of transportation, should be covered in the transportation, should not be violent vibration, impact, etc.

### 10.4. Storage

Products shall be stored in accordance with GB 3873.

## 11. Weight and Dimensions

