


Manganese Dioxide Lithium Coin Batteries: Individual Specifications

CR1216


Dimensions(mm)



Weight:0.7g

CR1220

Dimensions(mm)




Weight:1.2g


Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	25
Continuous standard load (mA)	0.1
Operating temperature (C)	-30 ~ +60


Temperature Characteristics

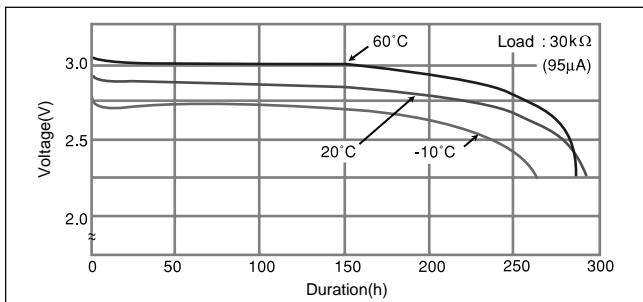

Operating voltage vs. load resistance (voltage at 50% discharge depth)

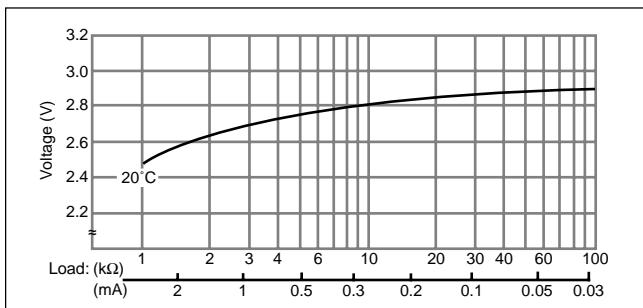


Capacity vs. load resistance

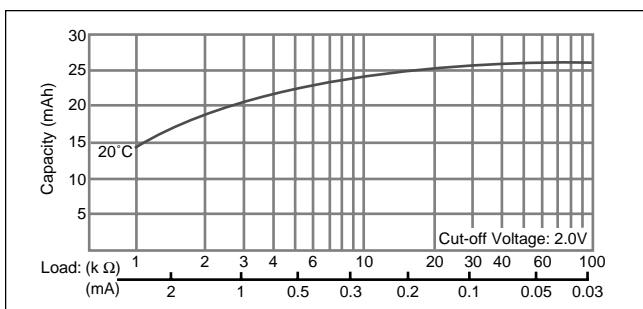


Specification

Nominal voltage (V)	3
Nominal capacity (mAh)	35
Continuous standard load (mA)	0.1
Operating temperature (C)	-30 ~ +60


Temperature Characteristics

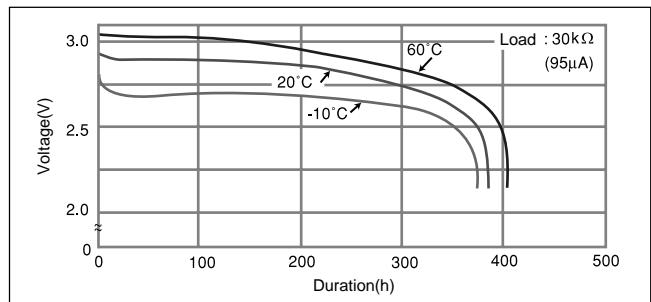

Operating voltage vs. load resistance (voltage at 50% discharge depth)

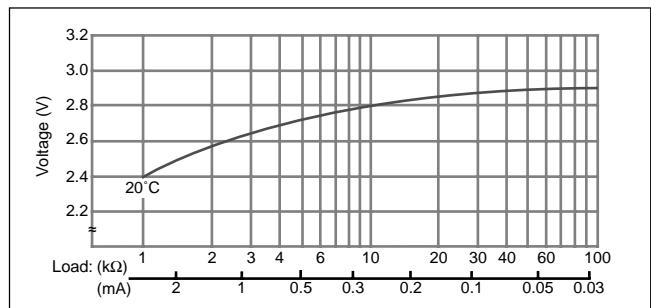

Capacity vs. load resistance

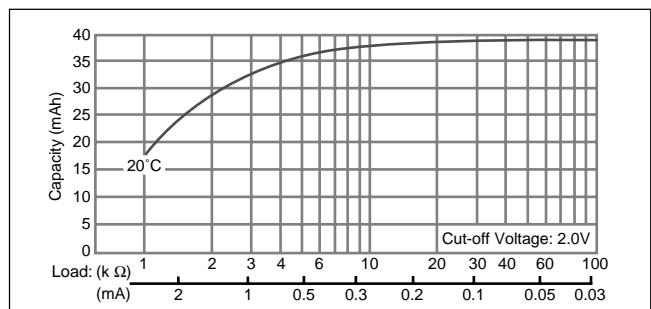

Тел.: (495) 795-0805

Эл. почта: info@rct.ru

Сайт: www.rct.ru

РАДИОТЕХ