

Coin Cells with Tabs

Three pins horizontal mounting



renata
batteries



Catalogue of three-pins standard tabbed coin cells for horizontal mounting on PCBs.

Features

- Excellent solderability thanks to solder-plated areas
- Suitable for wave-soldering

Specifications

- Solder contacts stainless steel AISI 301, thickness 0.15 mm
- tin-plated solder area plated throughout, thickness min. 5 µm. Solderability according to MIL-STD 883C, method 2003.3

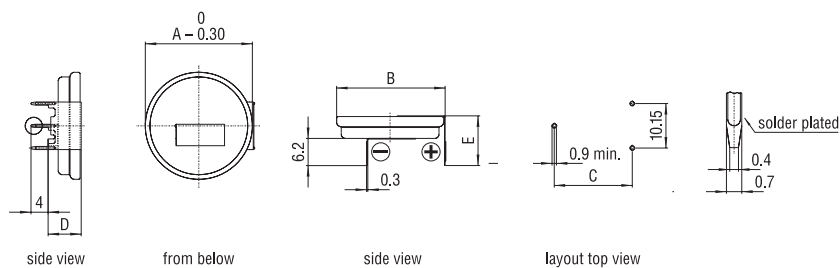

Model	Nominal Capacity (mAh)	Max. Dimensions (mm)					Weight (g)	Part.No.*
		A	B	C	D	E		
CR1632RH-LF	125	16.00	16.35	15.20	5.45	9.45	2.0	701238
CR2016RH MFR	90	20.00	20.20	15.20	3.95	7.95	2.0	701594
CR2016RH-LF	80	20.00	20.20	15.20	3.95	7.95	2.0	701380
CR2025RH MFR	165	20.00	20.20	15.20	4.85	8.85	2.6	701597
CR2025RH-LF	170	20.00	20.20	15.20	4.85	8.85	2.6	701075
CR2032RH MFR	225	20.00	20.20	15.20	5.45	9.45	3.1	701604
CR2032RH-LF	235	20.00	20.20	15.20	5.45	9.45	3.1	701080
CR2032RH1 MFR	225	20.00	20.20	17.80	5.45	9.45	3.1	701605
CR2032RH1-LF	235	20.00	20.20	17.80	5.45	9.45	3.1	701081
CR2032RH2 MFR	225	20.00	20.35	20.40	5.45	9.45	3.0	701724
CR2032RH2-LF	235	20.00	20.35	20.40	5.45	9.45	3.0	701082
CR2325RH-LF	190	23.00	23.20	17.80	4.85	8.85	3.3	701087
CR2430RH-LF	285	24.50	24.70	17.80	5.45	9.45	4.4	701092
CR2430RH1-LF	285	24.50	24.70	20.40	5.45	9.45	4.4	701093
CR2450NRH-LF	540	24.50	24.70	17.80	7.35	11.35	6.2	701097
CR2450NRH1-LF	540	24.50	24.70	20.40	7.35	11.35	6.2	701098
CR2477NRH-LF	950	24.50	24.70	17.80	10.05	14.05	8.5	701103

*Packaging: Industrial Bulk (B-Trays)