




Li/SOCl<sub>2</sub> Model: ER14505M (AA)

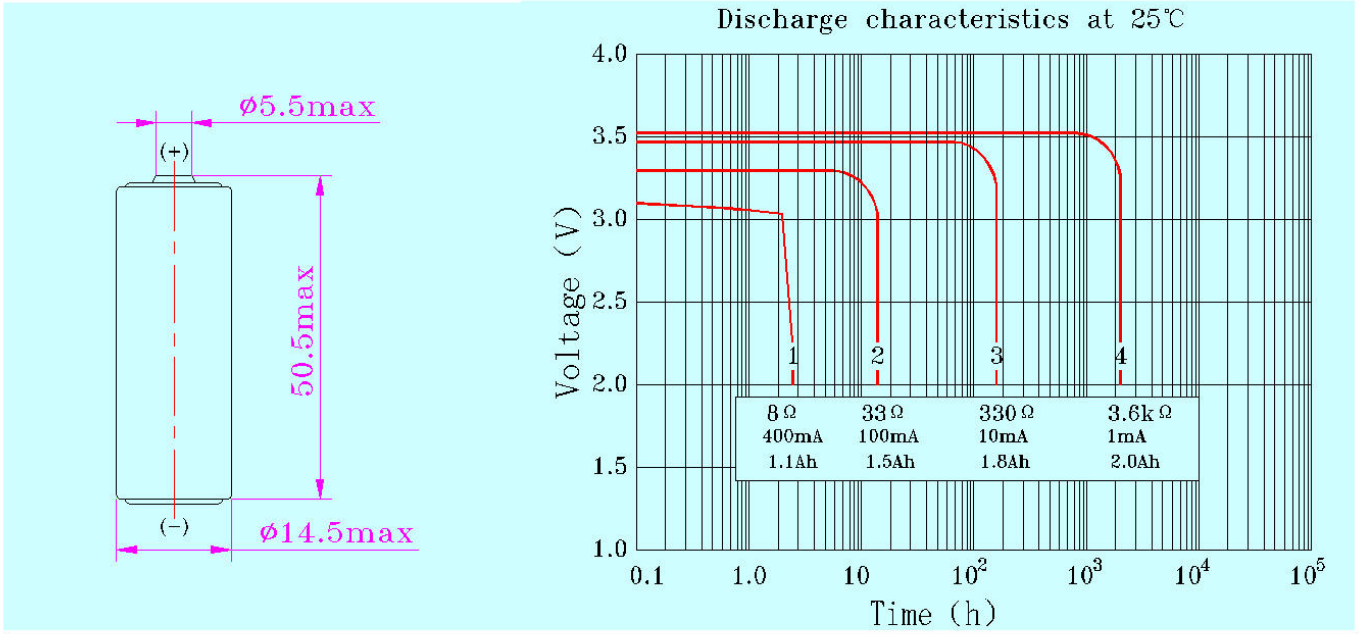

**Performance data (at 25°C)**

Rated capacity (1mA to 2.V)..... 2000mAh  
 Rated voltage..... 3.6V  
 Max. Continuous operating  
 Current..... 400mA  
 Max. Pulse current..... 800mA  
 Weight..... 19g  
 Dimension.....  $\Phi 14.5 \times 50.5\text{mm}$   
 Operating temperature range... -55°C~+85°C

**Terminals available:**

- AX-----axial leads
- T-----welding pins
- P-----plastic plug

Special design is acceptable

Data above is for reference

