

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJC 06/10/14'		

Notes:

1.Materials

1.1. Insulator: thermoplastic

2.Specifications

2.1. Temperature range:-20~+80°C.

2.2. Contact resistance:100mΩ max.


2.3. Insulation resistance:1000MΩ min.

2.4. Dielectric withstanding voltage:AC 500V
Per minute.

3.Product number code:

DS1136-21 - X X X X

- Housing color
- T: Transparent
- Contact plating
- N:full nickel
- Connector type
- S:socket
- No. of contacts
- 400: 400 Positions
- SERIES No.
- DS1136-21

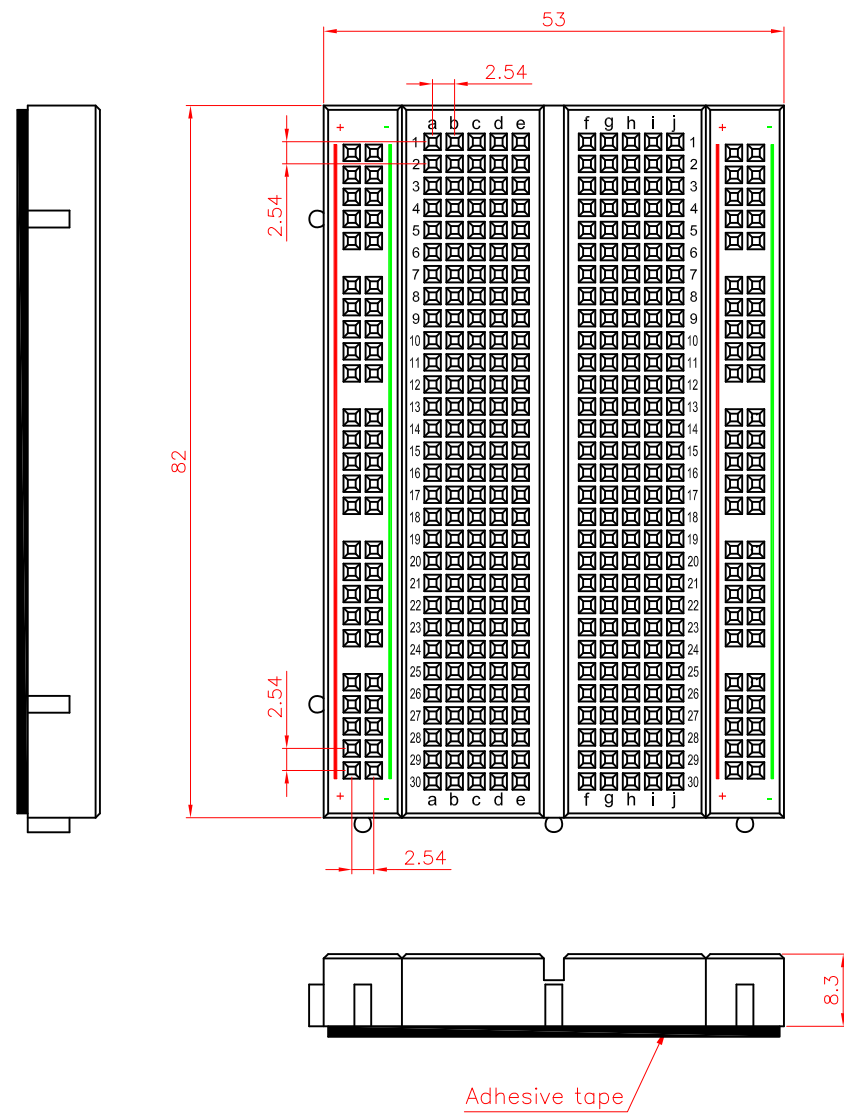

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2.54mm Bread Board 400 Positions	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1136-21 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNFLY ELECTRONIC CO., LTD				
DRAWING TYPE		CUSTOMER						
SCALE		1:1	SHEET 1 OF 1					
DRAWING NO.		C-DS1136-21-XXXX						