

SMT Buzzer Series


KLS3-SMT-14*04 14.4*14.4*4.3mm SMT Transducer Buzzer Series


SPECIFICATIONS

Rated Voltage $5V_{P-P}$ **Operating Voltage** 2-25V_{P-P} Max.Rated Current 2mA 83dB Min.S.P.L. (@ 10cm) 4. 0KHz Resonant Frequency 10000±30%pF Capacitance at 100Hz **Operating Temp** -20 ~ +70 ° C Weight 1. 2g



Dimensions (Unit:mm)

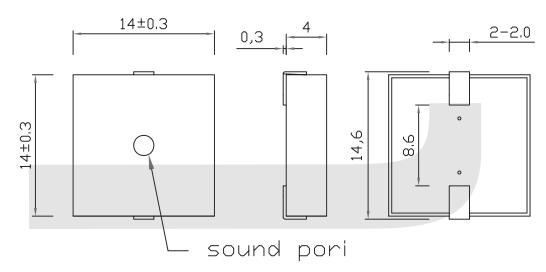



ORDER INFORMATION

